

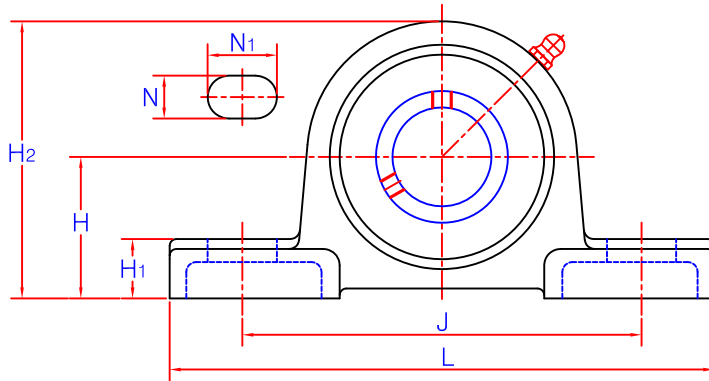


필로우형 볼베어링 유니트

UCP2

(원통구멍형, 경(輕)하중용)



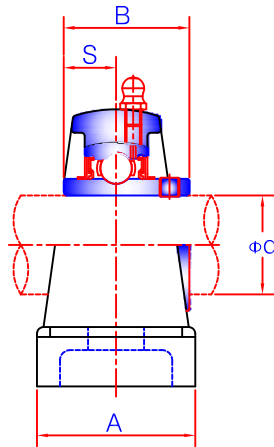


유니트 호칭번호	축지름		주요치수 (In.) (mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	d		H	L	A	J	N	N1	H1	H2	B	S					
	(in.)	(mm)											(mm)	(in.)			
UCP 201 201-8 202 202-10 203	1/2 5/8	12 15 17	13/16 30.2	5 127	113/32 36	33/4 95	1/2 13	3/4 19	1/2 13	23/8 60	1.2205 31.0	0.5000 12.7	10	3/8	UC 201 201-8 202 202-10 203	P 203	0.63 0.61 0.60
UCP 204-12 204	3/4	20	15/16 33.3	5 127	11/2 38	33/4 95	1/2 13	3/4 19	35/64 14	29/16 65	1.2205 31.0	0.5000 12.7	10	3/8	UC 204-12 204	P 204	0.66
UCP 205-14 205-15 205 205-16	7/8 15/16 1	25	17/16 36.5	51/2 140	11/2 38	41/8 105	1/2 13	3/4 19	19/32 15	225/32 71	1.3425 34.1	0.5630 14.3	10	3/8	UC 205-14 205-15 205 205-16	P 205	0.8
UCP 206-18 206 206-19 206-20	11/8 13/16 11/4	30	111/16 42.9	61/2 165	17/8 48	43/4 121	21/32 17	13/16 21	21/32 17	39/32 83	1.5000 38.1	0.6260 15.9	14	1/2	UC 206-18 206 206-19 206-20	P 206	1.3
UCP 207-20 207-21 207-22 207 207-23	11/4 15/16 13/8 17/16	35	17/8 47.6	69/16 167	17/8 48	5 127	21/32 17	13/16 21	45/64 18	321/32 93	1.6890 42.9	0.6890 17.5	14	1/2	UC 207-20 207-21 207-22 207 207-23	P 207	1.6
UCP 208-24 208-25 208	11/2 19/16	40	115/16 49.2	71/4 184	21/8 54	513/32 137	21/32 17	13/16 21	45/64 18	327/32 98	1.9370 49.2	0.7480 19.0	14	1/2	UC 208-24 208-25 208	P 208	2.0
UCP 209-26 209-27 209-28 209	15/8 111/16 13/4	45	21/8 54.0	715/32 190	21/8 54	53/4 146	21/32 17	13/16 21	25/32 20	43/16 106	1.9370 49.2	0.7480 19.0	14	1/2	UC 209-26 209-27 209-28 209	P 209	2.2
UCP 210-30 210-31 210 210-32	17/8 115/16 2	50	21/4 57.2	81/8 206	23/8 60	61/4 159	25/32 20	1 25	13/16 21	41/2 114	2.0315 51.6	0.7480 19.0	16	5/8	UC 210-30 210-31 210 210-32	P 210	2.9
UCP 211-32 211-34 211 211-35	2 21/8 23/16	55	21/2 63.5	85/8 219	23/8 60	623/32 171	25/32 20	1 25	29/32 23	431/32 126	2.1890 55.6	0.8740 22.2	16	5/8	UC 211-32 211-34 211 211-35	P 211	3.6
UCP 212-36 212 212-38 212-39	21/4 23/8 27/16	60	23/4 69.8	91/2 241	23/4 70	71/4 184	25/32 20	1 25	1 25	57/16 138	2.5630 65.1	1.0000 25.4	16	5/8	UC 212-36 212 212-38 212-39	P 212	4.9
UCP 213-40 213	21/2	65	3 76.2	1025/64 264	23/4 70	8 203	1 25	13/16 30	11/16 27	515/16 151	2.5630 65.1	1.0000 25.4	20	3/4	UC 213-40 213	P 213	5.9
UCP 214-44 214	23/4	70	31/8 79.4	1015/32 266	227/32 72	89/32 210	1 25	13/16 30	11/16 27	63/16 157	2.9370 74.6	1.1890 30.2	20	3/4	UC 214-44 214	P 214	6.8
UCP 215-47 215 215-48	215/16 3	75	31/4 82.6	1013/16 275	229/32 74	817/32 217	1 25	13/16 30	13/32 28	613/32 163	3.0630 77.8	1.3110 33.3	20	3/4	UC 215-47 215 215-48	P 215	7.4
UCP 216		80	31/2 88.9	111/2 292	31/16 78	91/8 232	1 25	13/16 30	13/16 30	657/64 175	3.2520 82.6	1.3110 33.3	20	3/4	UC 216	P 216	9.0
UCP 217-52 217	31/4	85	33/4 95.2	127/32 310	39/32 83	923/32 247	1 25	13/16 30	11/4 32	723/64 187	3.3740 85.7	1.3425 34.1	20	3/4	UC 217-52 217	P 217	10.8
UCP 218-56 218	31/2	90	4 101.6	127/8 327	315/32 88	105/16 262	11/16 27	113/32 36	15/16 33	77/8 200	3.7795 96.0	1.5630 39.7	20	3/4	UC 218-56 218	P 218	13.9


필로우형 볼베어링 유니트

UCPX

(원통구멍형, 중(中)하중용)

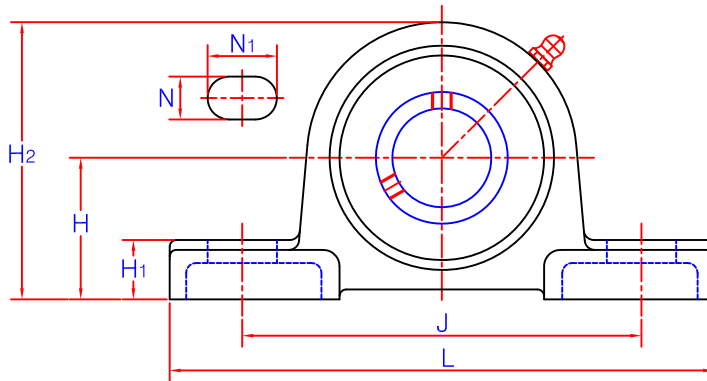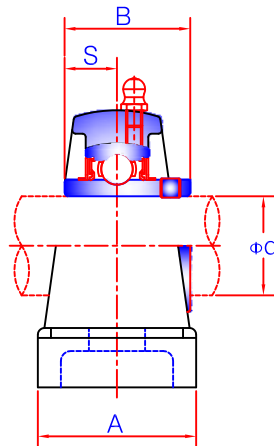

SL방식






L3방식

유니트 호칭번호	축지름 d		주요치수 (in./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	N ₁	H ₁	H ₂	B	S	(mm)	(in.)			
UCP X05 X05-16	1	25	1 3/4 44.45	6 1/4 159	2 51	4 11/16 119	2 1/32 17	1 25	45/64 18	3 11/32 85	1.5000 38.1	0.6260 15.9	14	1/2	UC X05 X05-16	P X05	1.5
UCP X06 X06-19 X06-20	1 3/16 1 1/4	30	1 7/8 47.6	6 7/8 175	2 1/4 57	5 127	2 1/32 17	1 25	25/32 20	3 45/64 94	1.6890 42.9	0.6890 17.5	14	1/2	UC X06 X06-19 X06-20	P X06	2.1
UCP X07-22 X07 X07-23	1 3/8 1 7/16	35	2 1/8 54.0	8 203	2 1/4 57	5 21/32 144	2 1/32 17	1 3/16 30	7/8 22	4 1/8 105	1.9370 49.2	0.7480 19.0	14	1/2	UC X07-22 X07 X07-23	P X07	2.7
UCP X08-24 X08	1 1/2	40	2 5/16 58.7	8 3/4 222	2 5/8 67	6 5/32 156	2 5/32 20	1 1/4 32	1 1/32 26	4 7/16 113	1.9370 49.2	0.7480 19.0	16	5/8	UC X08-24 X08	P X08	3.5
UCP X09-27 X09-28 X09	1 11/16 1 3/4	45	2 5/16 58.7	8 3/4 222	2 5/8 67	6 5/32 156	2 5/32 20	1 5/16 33	1 1/32 26	4 9/16 116	2.0315 51.6	0.7480 19.0	16	5/8	UC X09-27 X09-28 X09	P X09	3.7
UCP X10-31 X10 X10-32	1 15/16 2	50	2 1/2 63.5	9 1/2 241	2 7/8 73	6 23/32 171	2 5/32 20	1 29/64 37	1 1/16 27	4 31/32 126	2.1890 55.6	0.8740 22.2	16	5/8	UC X10-31 X10 X10-32	P X10	4.6
UCP X11 X11-35 X11-36	2 3/16 2 1/4	55	2 3/4 69.8	10 1/4 260	3 1/8 79	7 1/4 184	1 25	1 29/64 37	1 3/16 30	5 15/32 139	2.5630 65.1	1.0000 25.4	20	3/4	UC X11 X11-35 X11-36	P X11	6.5
UCP X12 X12-38 X12-39	2 3/8 2 7/16	60	3 76.2	11 1/4 286	3 9/32 83	8 203	1 25	1 5/8 41	1 1/4 32	5 15/16 151	2.5630 65.1	1.0000 25.4	20	3/4	UC X12 X12-38 X12-39	P X12	7.7
UCP X13-40 X13	2 1/2	65	3 76.2	11 1/4 286	3 9/32 83	8 203	1 25	1 5/8 41	1 1/4 32	5 15/16 151	2.9370 74.6	1.1890 30.2	20	3/4	UC X13-40 X13	P X13	8.1
UCP X14-44 X14	2 3/4	70	3 1/2 88.9	13 330	3 1/2 89	9 1/32 229	1 1/16 27	2 51	1 3/8 35	6 25/32 172	3.0630 77.8	1.3110 33.3	22	7/8	UC X14-44 X14	P X14	10.2
UCP X15 X15-48	3	75	3 1/2 88.9	13 330	3 1/2 89	9 1/8 232	1 1/16 27	2 51	1 3/8 35	6 27/32 174	3.2520 82.6	1.3110 33.3	22	7/8	UC X15 X15-48	P X15	10.8
UCP X16		80	4 101.6	15 381	4 1/32 102	11 5/32 283	1 1/16 27	2 5/16 59	1 21/32 42	7 3/4 197	3.3740 85.7	1.3425 34.1	22	7/8	UC X16	P X16	15.3
UCP X17		85	4 101.6	15 381	4 1/32 102	11 5/32 283	1 1/16 27	2 5/16 59	1 21/32 42	7 61/64 202	3.7795 96.0	1.5630 39.7	22	7/8	UC X17	P X17	16.1
UCP X18-56 X18	3 1/2	90	4 101.6	15 381	4 3/8 111	11 5/32 283	1 1/16 27	2 3/8 60	1 25/32 45	8 1/8 206	4.0945 104	1.6890 42.9	22	7/8	UC X18-56 X18	P X18	19.1
UCP X20 X20-64	4	95	5 127	17 432	4 3/4 121	13 9/32 337	1 15/16 33	2 17/32 64	2 1/16 52	9 27/32 250	4.6260 117.5	1.9370 49.2	27	1	UC X20 X20-64	P X20	30.4

필로우형 볼베어링 유니트

UCP3

(원통구멍형, 중(重)하중용)

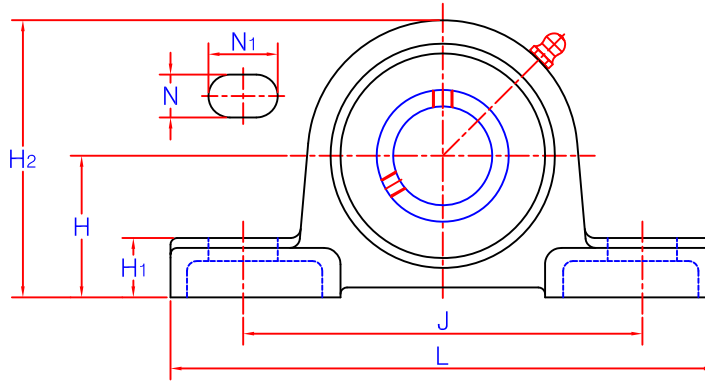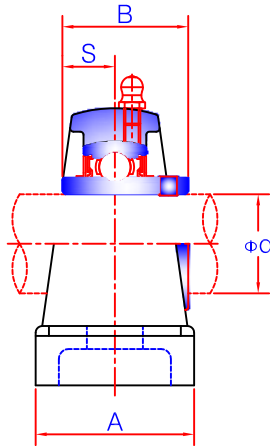




SL방식

유니트 호칭번호	축지름 d		주요치수 (in./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	N ₁	H ₁	H ₂	B	S	(mm)	(in.)			
UCP 305 305-16	1	25	1 _{49/64} 45	6 _{7/8} 175	1 _{3/4} 45	5 _{3/16} 132	2 _{1/32} 17	2 _{5/32} 20	1 _{9/32} 15	3 _{11/32} 85	1.4961 38	0.5906 15	14	1/2	UC 305 305-16	P 305	1.7
UCP 306-18 306	1 1/8	30	1 _{31/32} 50	7 _{3/32} 180	1 _{31/32} 50	5 _{1/2} 140	2 _{1/32} 17	2 _{5/32} 20	4 _{5/64} 18	3 _{3/4} 95	1.6929 43	0.6693 17	14	1/2	UC 306-18 306	P 306	2.2
UCP 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	2 _{13/64} 56	8 _{9/32} 210	2 _{7/32} 56	6 _{5/16} 160	2 _{1/32} 17	1 25	2 _{5/32} 20	4 _{11/64} 106	1.8897 48	0.7480 19	14	1/2	UC 307-20 307-22 307 307-23	P 307	3.0
UCP 308-24 308	1 1/2	40	2 _{23/64} 60	8 _{21/32} 220	2 _{3/8} 60	6 _{11/16} 170	2 _{1/32} 17	1 _{1/16} 27	7 ₈ 22	4 _{9/16} 116	2.0472 52	0.7480 19	14	1/2	UC 308-24 308	P 308	3.8
UCP 309-28 309	1 3/4	45	2 _{41/64} 67	9 _{21/32} 245	2 _{5/8} 67	7 _{15/32} 190	2 _{5/32} 20	1 _{3/16} 30	1 _{5/16} 24	5 _{5/64} 129	2.2441 57	0.8661 22	16	5/8	UC 309-28 309	P 309	4.9
UCP 310-31 310	1 15/16	50	2 _{61/64} 75	10 _{13/16} 275	2 _{15/16} 75	8 _{11/32} 212	2 _{5/32} 20	1 _{3/8} 35	1 _{1/16} 27	5 _{5/8} 143	2.4015 61	0.8661 22	16	5/8	UC 310-31 310	P 310	6.6
UCP 311-32 311	2	55	3 _{5/32} 80	12 _{7/32} 310	3 _{5/32} 80	9 _{9/32} 236	2 _{5/32} 20	1 _{1/2} 38	1 _{3/16} 30	6 _{1/16} 154	2.5984 66	0.9842 25	16	5/8	UC 311-32 311	P 311	7.9
UCP 312		60	3 _{11/32} 85	13 330	3 _{11/32} 85	9 _{27/32} 250	1 25	1 _{1/2} 38	1 _{1/4} 32	6 _{1/2} 165	2.7953 71	1.0236 26	20	3/4	UC 312	P 312	9.5
UCP 313-40 313	2 1/2	65	3 _{35/64} 90	13 _{3/8} 340	3 _{17/32} 90	10 _{1/4} 260	1 25	1 _{1/2} 38	1 _{5/16} 33	6 _{15/16} 176	2.9528 75	1.1811 30	20	3/4	UC 313-40 313	P 313	10.7
UCP 314-44 314	2 3/4	70	3 _{47/64} 95	14 _{3/16} 360	3 _{17/32} 90	11 _{1/32} 280	1 _{1/16} 27	1 _{9/16} 40	1 _{3/8} 35	7 _{23/64} 187	3.0709 78	1.2992 33	22	7/8	UC 314-44 314	P 314	12.4
UCP 315 315-48	3	75	3 _{15/16} 100	14 _{31/32} 380	3 _{15/16} 100	11 _{13/32} 290	1 _{1/16} 27	1 _{9/16} 40	1 _{3/8} 35	7 _{25/32} 198	3.2283 82	1.2598 32	22	7/8	UC 315 315-48	P 315	14.8
UCP 316		80	4 _{11/64} 106	15 _{3/4} 400	4 _{11/32} 110	11 _{13/16} 300	1 _{1/16} 27	1 _{9/16} 40	1 _{9/16} 40	8 _{9/32} 210	3.3858 86	1.3386 34	22	7/8	UC 316	P 316	18.5
UCP 317		85	4 _{13/32} 112	16 _{17/32} 420	4 _{11/32} 110	12 _{19/32} 320	1 _{5/16} 33	1 _{25/32} 45	1 _{9/16} 40	8 _{21/32} 220	3.7795 96	1.5748 40	27	1	UC 317	P 317	20.3
UCP 318-56 318	3 1/2	90	4 _{41/64} 118	16 _{15/16} 430	4 _{11/32} 110	13 330	1 _{5/16} 33	1 _{25/32} 45	1 _{25/32} 45	9 _{1/4} 235	3.7795 96	1.5748 40	27	1	UC 318-56 318	P 318	22.8
UCP 319		95	4 _{59/64} 125	18 _{1/2} 470	4 _{23/32} 120	14 _{3/16} 360	1 _{13/32} 36	1 _{31/32} 50	1 _{25/32} 45	9 _{27/32} 250	4.0551 103	1.6142 41	30	1 1/8	UC 319	P 319	29.0
UCP 320 320-64	4	100	5 _{33/64} 140	19 _{9/32} 490	4 _{23/32} 120	14 _{31/32} 380	1 _{13/32} 36	1 _{31/32} 50	2 _{31/32} 50	10 _{13/16} 275	4.2519 108	1.6535 42	30	1 1/8	UC 320 320-64	P 320	35.1
UCP 321		105	5 _{33/64} 140	19 _{9/32} 490	4 _{23/32} 120	14 _{31/32} 380	1 _{13/32} 36	1 _{31/32} 50	2 _{31/32} 50	11 _{39/64} 280	4.4094 112	1.7323 44	30	1 1/8	UC 321	P 321	36
UCP 322		110	5 _{29/32} 150	20 _{15/32} 520	5 _{1/2} 140	15 _{3/4} 400	1 _{9/16} 40	2 _{5/32} 55	2 _{5/32} 55	11 _{13/16} 300	4.6063 117	1.8110 46	33	1 1/4	UC 322	P 322	44
UCP 324		120	6 _{19/64} 160	22 _{7/16} 570	5 _{1/2} 140	17 _{23/32} 450	1 _{9/16} 40	2 _{5/32} 55	2 _{9/16} 65	12 _{19/32} 320	4.9606 126	2.0079 51	33	1 1/4	UC 324	P 324	55.4
UCP 326		130	7 _{3/32} 180	23 _{5/8} 600	5 _{1/2} 140	18 _{29/32} 480	1 _{9/16} 40	2 _{5/32} 55	2 _{61/64} 75	13 _{31/32} 355	5.3150 135	2.1260 54	33	1 1/4	UC 326	P 326	72.1
UCP 328		140	7 _{7/8} 200	24 _{13/32} 620	5 _{1/2} 140	19 _{11/16} 500	1 _{9/16} 40	2 _{5/32} 55	2 _{61/64} 75	15 _{11/32} 390	5.7086 145	2.3228 59	33	1 1/4	UC 328	P 328	92.5

각플랜지형 볼베어링 유닛

UCF2

(원통구멍형, 경(輕)하중용)

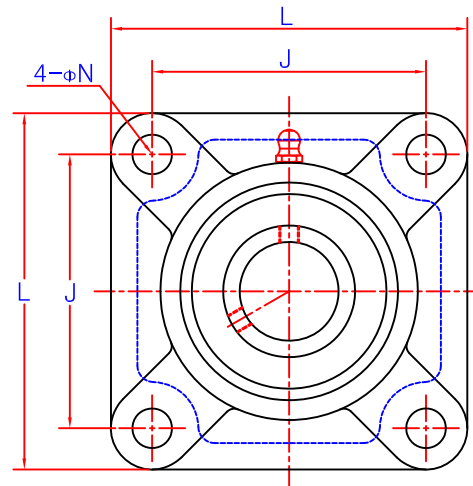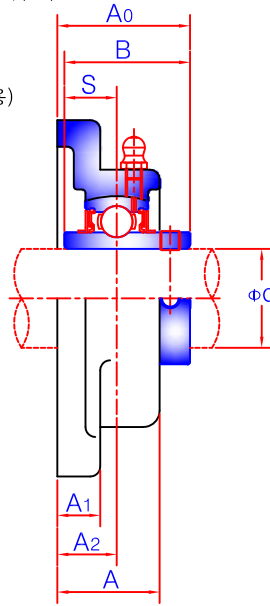

SL방식






L3방식

유닛 호칭번호	축지름 d		주요치수 (In.) (mm)									설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCF 201 201-8 202 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20	3 3/8 86	1 25.5	2 33/64 64	15/32 12	7/16 11	19/32 15	1 5/16 33.3	1.2205 31.0	0.5000 12.7	10	3/8	UC 201 201-8 202 202-10 203 204-12 204	F 204	0.64 0.62 0.61 0.59
UCF 205-14 205-15 205 205-16	7/8 1 5/16 1	25	3 3/4 95	1 1/16 27	2 3/4 70	15/32 12	35/64 14	5/8 16	1 13/32 35.7	1.3425 34.1	0.5630 14.3	10	3/8	UC 205-14 205-15 205 205-16	F 205	0.83
UCF 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	4 1/4 108	1 7/32 31	3 17/64 83	15/32 12	9/16 14.3	45/64 18	1 19/32 40.2	1.5000 38.1	0.6260 15.9	10	3/8	UC 206-18 206 206-19 206-20	F 206	1.1
UCF 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	4 19/32 117	1 11/32 34	3 5/8 92	35/64 14	39/64 15.5	3/4 19	1 3/4 44.4	1.6890 42.9	0.6890 17.5	12	7/16	UC 207-20 207-21 207-22 207 207-23	F 207	1.5
UCF 208-24 208-25 208	1 1/2 1 9/16	40	5 1/8 130	1 13/32 36	4 1/64 102	5/8 16	39/64 15.5	53/64 21	2 1/32 51.2	1.9370 49.2	0.7480 19.0	14	1/2	UC 208-24 208-25 208	F 208	1.9
UCF 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	5 13/32 137	1 1/2 38	4 9/64 105	5/8 16	11/16 17.5	55/64 22	2 1/16 52.2	1.9370 49.2	0.7480 19.0	14	1/2	UC 209-26 209-27 209-28 209	F 209	2.2
UCF 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	5 5/8 143	1 9/16 40	4 3/8 111	5/8 16	11/16 17.5	55/64 22	2 5/32 54.6	2.0315 51.6	0.7480 19.0	14	1/2	UC 210-30 210-31 210 210-32	F 210	2.5
UCF 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	6 3/8 162	1 11/16 43	5 1/8 130	3/4 19	49/64 19.5	63/64 25	2 5/16 58.4	2.1890 55.6	0.8740 22.2	16	5/8	UC 211-32 211-34 211 211-35	F 211	3.4
UCF 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	6 7/8 175	1 7/8 48	5 5/8 143	3/4 19	49/64 19.5	1 9/64 29	2 23/32 68.7	2.5630 65.1	1.0000 25.4	16	5/8	UC 212-36 212 212-38 212-39	F 212	4.2
UCF 213-40 213	2 1/2	65	7 3/8 187	1 31/32 50	5 55/64 149	3/4 19	29/32 23	1 3/16 30	2 3/4 69.7	2.5630 65.1	1.0000 25.4	16	5/8	UC 213-40 213	F 213	5.2
UCF 214-44 214	2 3/4	70	7 19/32 193	2 1/8 54	5 63/64 152	3/4 19	29/32 23	1 7/32 31	2 31/32 75.4	2.9370 74.6	1.1890 30.2	16	5/8	UC 214-44 214	F 214	5.9
UCF 215-47 215 215-48	2 15/16 3	75	7 7/8 200	2 7/32 56	5 61/64 159	3/4 19	29/32 23	1 11/32 34	3 3/32 78.5	3.0630 77.8	1.3110 33.3	16	5/8	UC 215-47 215 215-48	F 215	6.4
UCF 216		80	8 3/16 208	2 9/32 58	6 1/2 165	29/32 23	15/16 24	1 11/32 34	3 9/32 83.3	3.2520 82.6	1.3110 33.3	20	3/4	UC 216	F 216	7.3
UCF 217-52 217	3 1/4	85	8 21/32 220	2 15/32 63	6 57/64 175	29/32 23	1 25	1 27/64 36	3 7/16 87.6	3.3740 85.7	1.3425 34.1	20	3/4	UC 217-52 217	F 217	8.9
UCF 218-56 218	3 1/2	90	9 1/4 235	2 11/16 68	7 23/64 187	29/32 23	1 1/32 26	1 37/64 40	3 25/32 96.3	3.7795 96.0	1.5630 39.7	20	3/4	UC 218-56 218	F 218	11.4

각플랜지형 볼베어링 유니트

UCFX

(원통구멍형, 중(中)하중용)


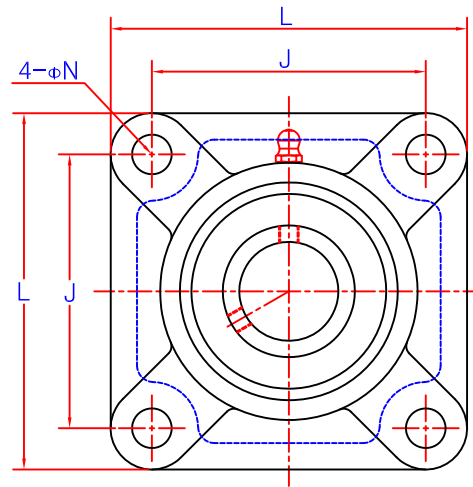
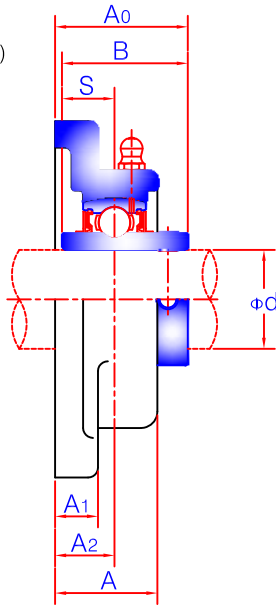


유니트 호칭번호	축지름 d		주요치수 (in./mm)									설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCF X05 X05-16	1	25	4 1/4 108	13/16 30	3 17/64 83	15/32 12	1/2 12.7	45/64 18	1 19/32 40.2	1.5000 38.1	0.6260 15.9	10	3/8	UC X05 X05-16	F X05	1.2
UCF X06 X06-19 X06-20	1 3/16 1 1/4	30	4 19/32 117	1 11/32 34	3 5/8 92	5/8 16	9/16 14.3	3/4 19	1 3/4 44.4	1.6890 42.9	0.6890 17.5	14	1/2	UC X06 X06-19 X06-20	F X06	1.6
UCF X07-22 X07 X07-23	1 3/8 1 7/16	35	5 1/8 130	1 1/2 38	4 1/64 102	5/8 16	9/16 14.3	53/64 21	2 1/32 51.2	1.9370 49.2	0.7480 19.0	14	1/2	UC X07-22 X07 X07-23	F X07	2.0
UCF X08-24 X08	1 1/2	40	5 13/32 137	1 9/16 40	4 9/64 105	3/4 19	9/16 14.3	55/64 22	2 1/16 52.2	1.9370 49.2	0.7480 19.0	16	5/8	UC X08-24 X08	F X08	2.4
UCF X09-27 X09-28 X09	1 11/16 1 3/4	45	5 3/8 143	1 9/16 40	4 3/8 111	3/4 19	9/16 14.3	29/32 23	2 3/16 55.6	2.0315 51.6	0.7480 19.0	16	5/8	UC X09-27 X09-28 X09	F X09	2.7
UCF X10-31 X10 X10-32	1 15/16 2	50	6 3/8 162	1 23/32 44	5 1/8 130	3/4 19	25/32 19.8	1 1/32 26	2 11/32 59.4	2.1890 55.6	0.8740 22.2	16	5/8	UC X10-31 X10 X10-32	F X10	3.7
UCF X11 X11-35 X11-36	2 3/16 2 1/4	55	6 7/8 175	1 15/16 49	5 5/8 143	3/4 19	25/32 19.8	1 9/64 29	2 23/32 68.7	2.5630 65.1	1.0000 25.4	16	5/8	UC X11 X11-35 X11-36	F X11	4.9
UCF X12 X12-38 X12-39	2 3/8 2 7/16	60	7 3/8 187	2 5/16 59	5 55/64 149	3/4 19	13/16 20.6	1 11/32 34	2 29/32 73.7	2.5630 65.1	1.0000 25.4	16	5/8	UC X12 X12-38 X12-39	F X12	5.7
UCF X13-40 X13	2 1/2	65	7 3/8 187	2 5/16 59	5 55/64 149	3/4 19	13/16 20.6	1 11/32 34	3 3/32 78.4	2.9370 74.6	1.1890 30.2	16	5/8	UC X13-40 X13	F X13	6.3
UCF X14-44 X14	2 3/4	70	7 3/4 197	2 3/8 60	5 63/64 152	29/32 23	15/16 23.8	1 29/64 37	3 7/32 81.5	3.0630 77.8	1.3110 33.3	20	3/4	UC X14-44 X14	F X14	7.0
UCF X15 X15-48	3	75	7 3/4 197	2 11/16 68	5 63/64 152	29/32 23	15/16 23.8	1 37/64 40	3 17/32 89.3	3.2520 82.6	1.3110 33.3	20	3/4	UC X15 X15-48	F X15	8.4
UCF X16		80	8 7/16 214	2 3/4 70	6 47/64 171	29/32 23	15/16 23.8	1 37/64 40	3 19/32 91.6	3.3740 85.7	1.3425 34.1	20	3/4	UC X16	F X16	9.4
UCF X17		85	8 7/16 214	2 3/4 70	6 47/64 171	29/32 23	15/16 23.8	1 36/64 40	3 25/32 96.3	3.7795 96.0	1.5630 39.7	20	3/4	UC X17	F X17	10.8
UCF X18-56 X18	3 1/2	90	8 7/16 214	3 76	6 47/64 171	29/32 23	15/16 23.8	1 49/64 45	4 3/16 106.1	4.0945 104.0	1.6890 42.9	20	3/4	UC X18-56 X18	F X18	11.9
UCF X20 X20-64	4	100	10 9/16 268	3 13/16 97	8 5/16 211	1 7/32 31	1 7/32 31	2 21/64 59	5 1/64 127.3	4.6260 117.5	1.9370 49.2	27	1	UC X20 X20-64	F X20	19.4

각플랜지형 볼베어링 유니트

UCF3

(원통구멍형, 중(重)하중용)


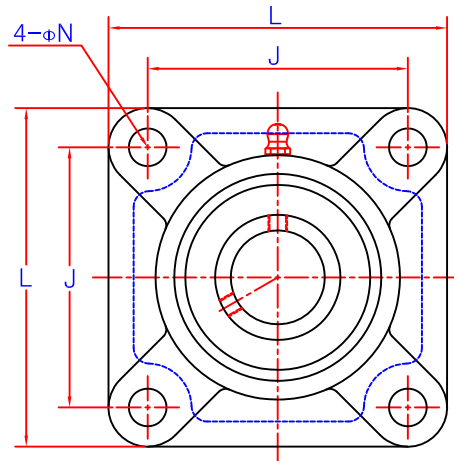
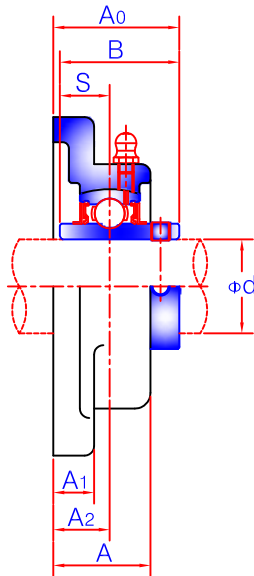


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)										설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																
	(in.)	(mm)	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)				
UCF 305 305-16	1	25	4 _{11/32} 110	1 _{5/32} 29	3 _{5/32} 80	5/8 16	1/2 13	5/8 16	1 _{17/32} 39	1.4961 38	0.5906 15	14	1/2	UC 305 305-16	F 305	1.3	
UCF 306-18 306	1 _{1/8}	30	4 _{29/32} 125	1 _{1/4} 32	3 _{47/64} 95	5/8 16	19/32 15	45/64 18	1 _{23/32} 44	1.6929 43	0.6693 17	14	1/2	UC 306-18 306	F 306	1.9	
UCF 307-20 307-22 307 307-23	1 _{1/4} 1 _{3/8} 1 _{7/16}	35	5 _{5/16} 135	1 _{13/32} 36	3 _{15/16} 100	3/4 19	5/8 16	25/32 20	1 _{15/16} 49	1.8897 48	0.7480 19	16	5/8	UC 307-20 307-22 307 307-23	F 307	2.3	
UCF 308-24 308	1 _{1/2}	40	5 _{29/32} 150	1 _{9/16} 40	4 _{13/32} 112	3/4 19	21/32 17	29/32 23	2 _{7/32} 56	2.0472 52	0.7480 19	16	5/8	UC 308-24 308	F 308	3.1	
UCF 309-28 309	1 _{3/4}	45	6 _{5/16} 160	2 _{3/32} 44	4 _{59/64} 125	3/4 19	23/32 18	63/64 25	2 _{3/8} 60	2.2441 57	0.8661 22	16	5/8	UC 309-28 309	F 309	4.0	
UCF 310-31 310	1 _{15/16}	50	6 _{7/8} 175	1 _{7/8} 48	5 _{13/64} 132	29/32 23	3/4 19	1 _{7/64} 28	2 _{5/8} 67	2.4015 61	0.8661 22	20	3/4	UC 310-31 310	F 310	5.1	
UCF 311-32 311	2	55	7 _{9/32} 185	2 _{1/16} 52	5 _{33/64} 140	29/32 23	25/32 20	1 _{3/16} 30	2 _{25/32} 71	2.5984 66	0.9842 25	20	3/4	UC 311-32 311	F 311	5.6	
UCF 312		60	7 _{11/16} 195	2 _{7/32} 56	5 _{29/32} 150	29/32 23	7/8 22	1 _{19/64} 33	3 _{1/16} 78	2.7953 71	1.0236 26	20	3/4	UC 312	F 312	6.9	
UCF 313-40 313	2 _{1/2}	65	8 _{3/16} 208	2 _{9/32} 58	6 _{17/32} 166	29/32 23	7/8 22	1 _{19/64} 33	3 _{1/16} 78	2.9528 75	1.1811 30	20	3/4	UC 313-40 313	F 313	7.8	
UCF 314-44 314	2 _{3/4}	70	8 _{29/32} 226	2 _{13/32} 61	7 _{1/64} 178	63/64 25	1 25	1 _{27/64} 36	3 _{3/16} 81	3.0709 78	1.2992 33	22	7/8	UC 314-44 314	F 314	10.1	
UCF 315 315-48	3	75	9 _{9/32} 236	2 _{19/32} 66	7 _{1/4} 184	63/64 25	1 25	1 _{17/32} 39	3 _{1/2} 89	3.2283 82	1.2598 32	22	7/8	UC 315 315-48	F 315	11.6	
UCF 316		80	9 _{27/32} 250	2 _{11/16} 68	7 _{23/32} 196	1 _{7/32} 31	1 _{1/16} 27	1 _{1/2} 38	3 _{17/32} 90	3.3858 86	1.3386 34	27	1	UC 316	F 316	12.8	
UCF 317		85	10 _{1/4} 260	2 _{29/32} 74	8 _{1/32} 204	1 _{7/32} 31	1 _{1/16} 27	1 _{47/64} 44	3 _{15/16} 100	3.7795 96	1.5748 40	27	1	UC 317	F 317	15.3	
UCF 318-56 318	3 _{1/2}	90	11 _{1/32} 280	3 76	8 _{1/2} 216	1 _{3/8} 35	1 _{3/16} 30	1 _{47/64} 44	3 _{15/16} 100	3.7795 96	1.5748 40	30	1 _{1/8}	UC 318-56 318	F 318	18.9	
UCF 319		95	11 _{13/32} 290	3 _{11/16} 94	8 _{31/32} 228	1 _{3/8} 35	1 _{3/16} 30	2 _{21/64} 59	4 _{3/4} 121	4.0551 103	1.6142 41	30	1 _{1/8}	UC 319	F 319	21.6	
UCF 320 320-64	4	100	12 _{7/32} 310	3 _{11/16} 94	9 _{17/32} 242	1 _{1/2} 38	1 _{1/4} 32	2 _{21/64} 59	4 _{29/32} 125	4.2519 108	1.6535 42	33	1 _{1/4}	UC 320 320-64	F 320	25.8	
UCF 321		105	12 _{7/32} 310	3 _{11/16} 94	9 _{17/32} 242	1 _{1/2} 38	1 _{1/4} 32	2 _{21/64} 59	5 127	4.4094 112	1.7323 44	33	1 _{1/4}	UC 321	F 321	30.2	
UCF 322		110	13 _{3/8} 340	3 _{25/32} 96	10 _{15/32} 266	1 _{39/64} 41	1 _{3/8} 35	2 _{23/64} 60	5 _{5/32} 131	4.6063 117	1.8110 46	36	1 _{3/8}	UC 322	F 322	35.3	
UCF 324		120	14 _{9/16} 370	4 _{11/32} 110	11 _{27/64} 290	1 _{39/64} 41	1 _{9/16} 40	2 _{9/16} 65	5 _{1/2} 140	4.9606 126	2.0079 51	36	1 _{3/8}	UC 324	F 324	47.3	
UCF 326		130	16 _{5/32} 410	4 _{17/32} 115	12 _{19/32} 320	1 _{39/64} 41	1 _{25/32} 45	2 _{9/16} 65	5 _{3/4} 146	5.3150 135	2.1260 54	36	1 _{3/8}	UC 326	F 326	65.5	
UCF 328		140	17 _{23/32} 450	4 _{29/32} 125	13 _{25/32} 350	1 _{39/64} 41	2 _{5/32} 55	2 _{61/64} 75	6 _{11/32} 161	5.7086 145	2.3228 59	36	1 _{3/8}	UC 328	F 328	93.4	

마개이음볼이 각플랜지형 볼베어링 유니트

UCFS3

(원통구멍형, 중(重)하중용)

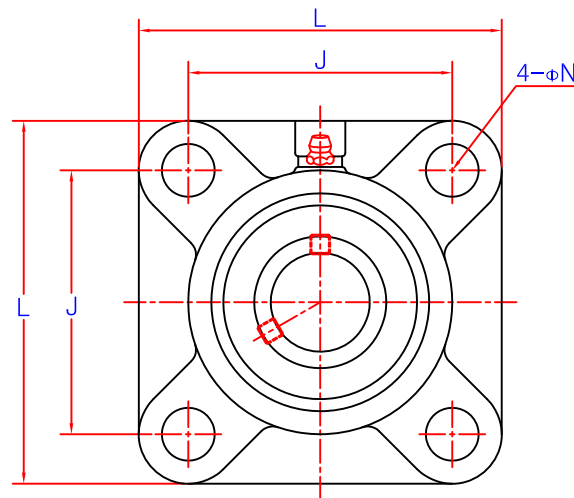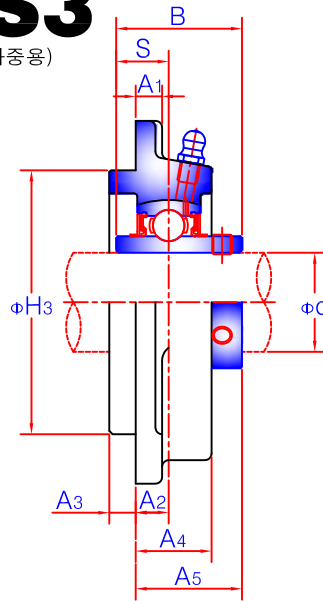


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)											설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																	
	(in.)	(mm)	L	H ₃	J	N	A ₁	A ₂	A ₃	A ₄	A ₅	B	S	(mm)	(in.)			
UCFS 305 305-16	1	25	4 _{11/32} 110	3.1496 80	3 _{5/32} 80	5/8 16	1/2 13	23/64 9	9/32 7	7/8 22	1 _{1/4} 32	1.4961 38	0.5906 15	14	1/2	UC 305 305-16	FS 305	1.4
UCFS 306-18 306	1 _{1/8}	30	4 _{29/32} 125	3.5433 90	3 _{47/64} 95	5/8 16	19/32 15	25/64 10	5/16 8	15/16 24	1 _{13/32} 36	1.6929 43	0.6693 17	14	1/2	UC 306-18 306	FS 306	1.9
UCFS 307-20 307-22 307 307-23	1 _{1/4} 1 _{3/8} 1 _{7/16}	35	5 _{5/16} 135	3.9370 100	3 _{15/16} 100	3/4 19	5/8 16	7/16 11	23/64 9	1 _{1/16} 27	1 _{9/16} 40	1.8897 48	0.7480 19	16	5/8	UC 307-20 307-22 307 307-23	FS 307	2.3
UCFS 308-24 308	1 _{1/2}	40	5 _{29/32} 150	4.5276 115	4 _{13/32} 112	3/4 19	21/32 17	33/64 13	25/64 10	1 _{3/16} 30	1 _{13/16} 46	2.0472 52	0.7480 19.0	16	5/8	UC 308-24 308	FS 308	3.4
UCFS 309-28 309	1 _{3/4}	45	6 _{5/16} 160	4.9213 125	4 _{59/64} 125	3/4 19	23/32 18	35/64 14	7/16 11	1 _{5/16} 33	1 _{15/16} 49	2.2441 57	0.8661 22	16	5/8	UC 309-28 309	FS 309	4.4
UCFS 310-31 310	1 _{15/16}	50	6 _{7/8} 175	5.5119 140	5 _{13/64} 132	29/32 23	3/4 19	5/8 16	15/32 12	1 _{13/32} 36	2 _{5/32} 55	2.4015 61	0.8861 22	20	3/4	UC 310-31 310	FS 310	5.3
UCFS 311-32 311	2	55	7 _{9/32} 185	5.9055 150	5 _{33/64} 140	29/32 23	25/32 20	43/64 17	33/64 13	1 _{17/32} 39	2 _{9/32} 58	2.5984 66	0.9842 25	20	3/4	UC 311-32 311	FS 311	6.1
UCFS 312		60	7 _{11/16} 195	6.2992 160	6 _{29/32} 150	29/32 23	7/8 22	3/4 19	35/64 14	1 _{21/32} 42	2 _{17/32} 64	2.7953 71	1.0236 26	20	3/4	UC 312	FS 312	7.4
UCFS 313-40 313	2 _{1/2}	65	8 _{3/16} 208	6.8898 175	6 _{17/32} 166	29/32 23	7/8 22	19/32 15	45/64 18	1 _{9/16} 40	2 _{3/8} 60	2.9528 75	1.1811 30	20	3/4	UC 313-40 313	FS 313	8.8
UCFS 314-44 314	2 _{3/4}	70	8 _{29/32} 226	7.2835 185	7 _{1/64} 178	63/64 25	1 25	45/64 18	45/64 18	1 _{11/16} 43	2 _{15/32} 63	3.0709 78	1.2992 33	22	7/8	UC 314-44 314	FS 314	11.2
UCFS 315 315-48	3	75	9 _{9/32} 236	7.8740 200	7 _{1/4} 184	63/64 25	1 25	53/64 21	45/64 18	1 _{7/8} 48	2 _{25/32} 71	3.2283 82	1.2598 32	22	7/8	UC 315 315-48	FS 315	13.7
UCFS 316		80	9 _{27/32} 250	8.2677 210	7 _{23/32} 196	1 _{7/32} 31	1 _{1/16} 27	45/64 18	25/32 20	1 _{7/8} 48	2 _{3/4} 70	3.3858 86	1.3386 34	27	1	UC 316	FS 316	15.1
UCFS 317		85	10 _{1/4} 260	8.6614 220	8 _{31/32} 204	1 _{7/32} 31	1 _{1/16} 27	15/16 24	25/32 20	2 _{1/8} 54	3 _{5/32} 80	3.7795 96	1.5748 40	27	1	UC 317	FS 317	17.3
UCFS 318-56 318	3 _{1/2}	90	11 _{1/32} 280	9.4488 240	9 _{1/2} 216	1 _{3/8} 35	1 _{3/16} 30	15/16 24	25/32 20	2 _{7/32} 56	3 _{5/32} 80	3.7795 96	1.5748 40	30	1 _{1/8}	UC 318-56 318	FS 318	21.3
UCFS 319		95	11 _{13/32} 290	9.8425 250	8 _{31/32} 228	1 _{3/8} 35	1 _{3/16} 30	1 _{17/32} 39	25/32 20	2 _{29/32} 74	3 _{31/32} 101	4.0551 103	1.6142 41	30	1 _{1/8}	UC 319	FS 319	24.5
UCFS 320 320-64	4	100	12 _{7/32} 310	10.2362 260	9 _{17/32} 242	1 _{1/2} 38	1 _{1/4} 32	1 _{17/32} 39	25/32 20	2 _{29/32} 74	4 _{1/8} 105	4.2519 108	1.6535 42	33	1 _{1/4}	UC 320 320-64	FS 320	29.5
UCFS 321		105	12 _{7/32} 310	10.2362 260	9 _{17/32} 242	1 _{1/2} 38	1 _{1/4} 32	1 _{17/32} 39	25/32 20	2 _{29/32} 74	4 _{7/32} 107	4.4094 112	1.7323 44	33	1 _{1/4}	UC 321	FS 321	32.7
UCFS 322		110	13 _{3/8} 340	11.8110 300	10 _{15/32} 266	1 _{39/64} 41	1 _{3/8} 35	1 _{3/8} 35	25/32 20	2 _{25/32} 71	4 _{3/16} 106	4.6063 117	1.8110 46	36	1 _{3/8}	UC 322	FS 322	39
UCFS 324		120	14 _{9/16} 370	12.9921 330	12 _{7/64} 290	1 _{39/64} 41	1 _{9/16} 40	1 _{3/8} 35	1 _{3/16} 30	3 _{5/32} 80	4 _{11/32} 110	4.9606 126	2.0079 51	36	1 _{3/8}	UC 324	FS 324	50.6
UCFS 326		130	16 _{5/32} 410	14.1732 360	12 _{19/32} 320	1 _{39/64} 41	1 _{25/32} 45	1 _{3/8} 35	1 _{3/16} 30	3 _{11/32} 85	4 _{9/16} 116	5.3150 135	2.1260 54	36	3/8	UC 326	FS 326	67.7
UCFS 328	5 _{1/2}	140	17 _{23/32} 450	15.7480 400	13 _{25/32} 350	1 _{39/64} 41	2 _{5/32} 55	1 _{49/64} 45	1 _{3/16} 30	3 _{3/4} 95	5 _{5/32} 131	5.7086 145	2.3228 59	36	1 _{3/8}	UC 328	FS 328	94

마개이음볼이 등근플랜지형 볼베어링 유니트

UCFC2

(원통구멍형, 경(輕)하중용)

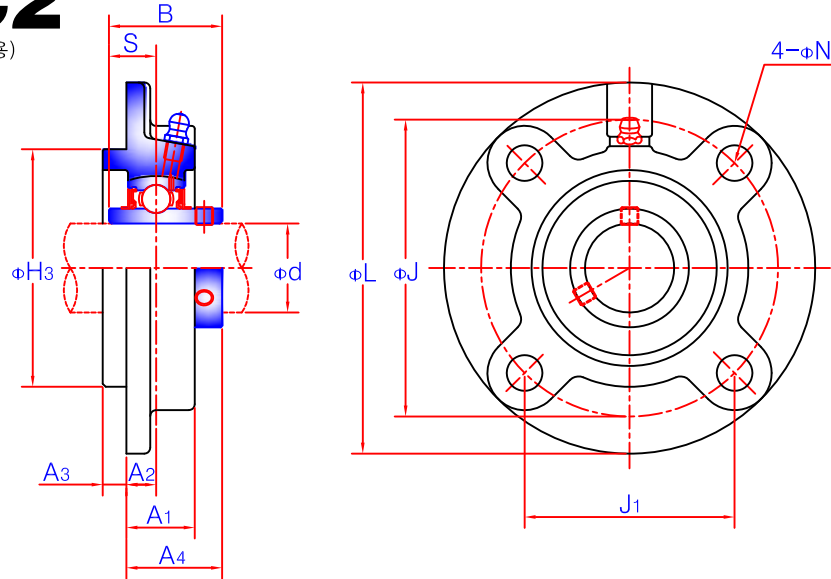


유니트 호칭번호	축지름		주요치수 (in./mm)											설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	L	H ₃	J	J ₁	N	A ₁	A ₂	A ₃	A ₄	B	S	(mm)	(in.)			
UCFC 201-8 202 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20														UC 201-8 202 202-10 203 204-12 204	FC 204	0.78
UCFC 205-14 205-15 205 205-16	7/8 15/16 1	25														UC 205-14 205-15 205 205-16	FC 205	0.95
UCFC 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30														UC 206-18 206 206-19 206-20	FC 206	1.3
UCFC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35														UC 207-20 207-21 207-22 207 207-23	FC 207	1.7
UCFC 208-24 208-25 208	1 1/2 1 9/16	40														UC 208-24 208-25 208	FC 208	2.0
UCFC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45														UC 209-26 209-27 209-28 209	FC 209	2.6
UCFC 210-30 210-31 210	1 7/8 1 15/16	50														UC 210-30 210-31 210	FC 210	2.9
UCFC 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55														UC 211-32 211-34 211 211-35	FC 211	4.2
UCFC 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60														UC 212-36 212 212-38 212-39	FC 212	5.0
UCFC 213-40 213	2 1/2	65														UC 213-40 213	FC 213	5.6
UCFC 214-44 214	2 3/4	70														UC 214-44 214	FC 214	6.8
UCFC 215-47 215 215-48	2 15/16 3	75														UC 215-47 215 215-48	FC 215	7.2
UCFC 216		80														UC 216	FC 216	8.7
UCFC 217-52 217	3 1/4	85														UC 217-52 217	FC 217	10.3
UCFC 218-56 218	3 1/2	90														UC 218-56 218	FC 218	13.3

마개이음볼이 등근플랜지형 볼베어링 유니트

UCFCX

(원통구멍형, 중(中)하중용)

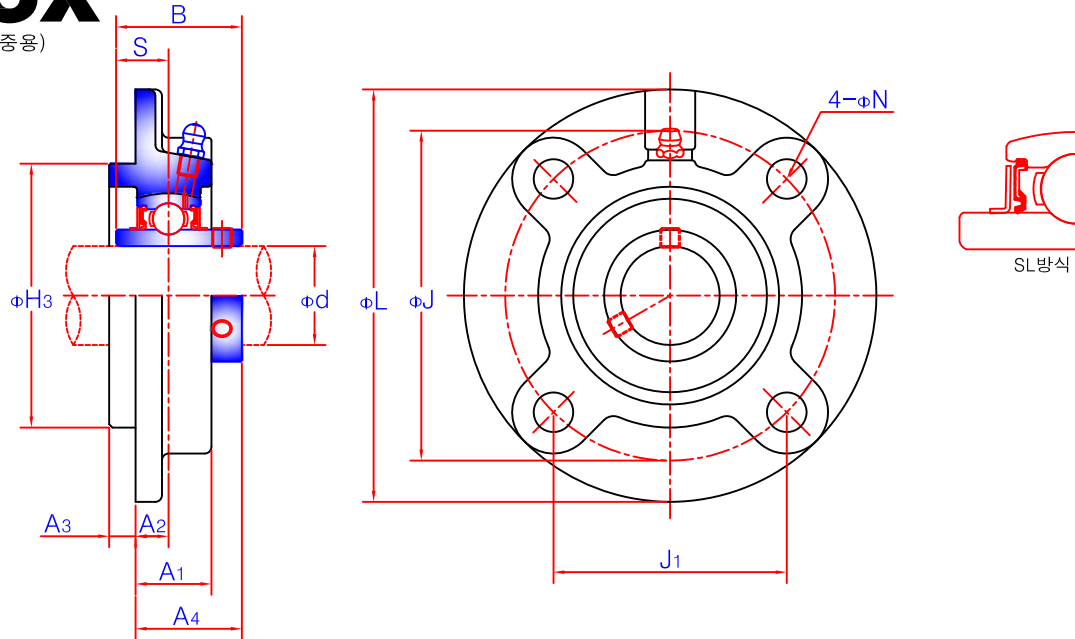


유니트 호칭번호	축지름		주요치수 (in./mm)											설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																	
	(in.)	(mm)	L	H ₃	J	J ₁	N	A ₁	A ₂	A ₃	A ₄	B	S	(mm)	(in.)			
UCFC X05 X05-16	1	25	43/8 111	3 76	35/8 92	29/16 65.0	3/8 9.5	15/16 24.0	13/32 10	15/64 6.0	19/32 32.2	1.5000 38.1	0.6260 15.9	8	5/16	UC X05 X05-16	FC X05	1.2
UCFC X06 X06-19 X06-20	13/16 1 1/4	30	5 127	311/32 85	49/64 105	259/64 74.2	15/32 12.0	7/8 22.5	5/16 8	3/8 9.5	15/16 33.4	1.6890 42.9	0.6890 17.5	10	3/8	UC X06 X06-19 X06-20	FC X06	1.5
UCFC X07-22 X07 X07-23	13/8 1 7/16	35	5 1/4 133	35/8 92	43/8 111	33/32 78.5	15/32 12.0	1 1/32 26.0	23/64 9	7/16 11.0	1 17/32 39.2	1.9370 49.2	0.7480 19.0	10	3/8	UC X07-22 X07 X07-23	FC X07	1.9
UCFC X08-24 X08	1 1/2	40	5 1/4 133	35/8 92	43/8 111	33/32 78.5	15/32 12.0	1 1/32 26.0	23/64 9	7/16 11.0	1 17/32 39.2	1.9370 49.2	0.7480 19.0	10	3/8	UC X08-24 X08	FC X08	2.0
UCFC X09-27 X09-28 X09	1 11/16 1 3/4	45	63/32 155	4 1/4 108	5 1/8 130	35/8 91.9	35/64 14.0	1 25.0	5/16 8	15/32 12.0	1 19/32 40.6	2.0315 51.6	0.7480 19.0	12	7/16	UC X09-27 X09-28 X09	FC X09	2.6
UCFC X10-31 X10 X10-32	1 15/16 2	50	63/8 162	4 41/64 118	5 23/64 136	3 25/32 96.2	35/64 14.0	1 25.0	9/32 7	5/8 16.0	1 19/32 40.4	2.1890 55.6	0.8740 22.2	12	7/16	UC X10-31 X10 X10-32	FC X10	3.2
UCFC X11 X11-35 X11-36	23/16 2 1/4	55	73/32 180	5 127	5 63/64 152	4 15/64 107.5	5/8 16.0	1 1/32 26.0	5/32 4	55/64 22.0	1 23/32 43.7	2.5630 65.1	1.0000 25.4	14	1/2	UC X11 X11-35 X11-36	FC X11	4.3
UCFC X12 X12-38 X12-39	23/8 2 7/16	60	7 5/8 194	5 1/2 140	6 1/2 165	4 19/32 116.7	5/8 16.0	15/16 33.0	7/16 11	25/32 20.0	2 50.7	2.5630 65.1	1.0000 25.4	14	1/2	UC X12 X12-38 X12-39	FC X12	5.3
UCFC X13-40 X13	2 1/2	65	7 5/8 194	5 1/2 140	6 1/2 165	4 19/32 116.7	5/8 16.0	15/16 33.0	7/16 11	25/32 20.0	23/16 55.4	2.9370 74.6	1.1890 30.2	14	1/2	UC X13-40 X13	FC X13	5.7
UCFC X14-44 X14	2 3/4	70	8 3/4 222	6 15/32 164	7 31/64 190	59/32 134.3	3/4 19.0	1 13/32 36.0	35/64 14	25/32 20.0	25/16 58.5	3.0630 77.8	1.3110 33.3	16	5/8	UC X14-44 X14	FC X14	7.3
UCFC X15 X15-48	3	75	8 3/4 222	6 15/32 164	7 31/64 190	59/32 134.3	3/4 19.0	1 3/8 35.0	15/32 12	55/64 22.0	2 13/32 61.3	3.2520 82.6	1.3110 33.3	16	5/8	UC X15 X15-48	FC X15	8
UCFC X16		80	10 1/4 260	7 5/16 186	8 5/8 219	63/32 154.8	29/32 23.0	1 13/32 36.0	13/32 10	63/64 25.0	2 7/16 61.6	3.3740 85.7	1.3425 34.1	20	3/4	UC X16	FC X16	11.3
UCFC X17		85	10 1/4 260	7 5/16 186	8 5/8 219	63/32 154.8	29/32 23.0	1 13/32 36.0	13/32 10	63/64 25.0	2 5/8 66.3	3.7795 96.0	1.5630 39.7	20	3/4	UC X17	FC X17	12.9
UCFC X18-56 X18	3 1/2	90	10 1/4 260	7 5/16 186	8 5/8 219	63/32 154.8	29/32 23.0	1 11/16 43	15/32 12	13/32 28	2 7/8 73.1	4.0945 104	1.7000 42.9	20	3/4	UC X18	FC X18	13.5
UCFC X20 X20-64	4	100	10 7/8 276	8 1/8 206	9 3/8 238	6 5/8 168.3	29/32 23.0	2 19/32 66	7/8 22	13/32 28	39/16 90.3	4.6260 117.5	1.9370 49.2	20	3/4	UC X20 X20-64	FC X20	18.2

마개이음볼이 등극플랜지형 볼베어링 유니트

UCFCC2

(원통구멍형, 경(輕)하중용)



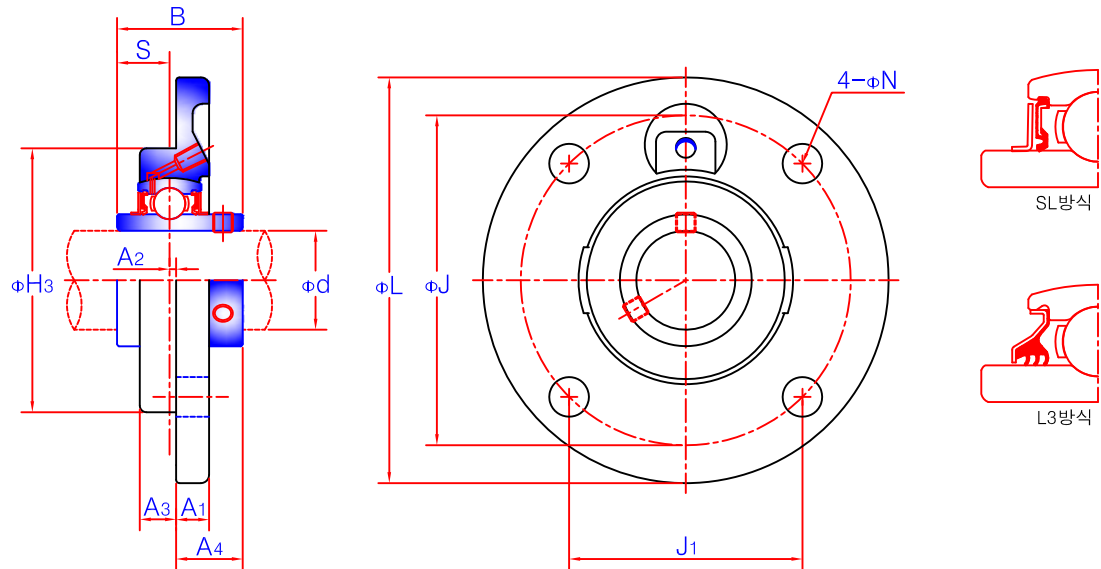


유니트 호칭번호	축지름		주요치수 (in./mm)											설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)	
	d																		
	(in.)	(mm)	L	H ₃	J	J ₁	N	A ₁	A ₂	A ₃	A ₄	B	S	(mm)	(in.)				
UCFCC 201-8 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20													8	5/16	UC 201-8 202-10 203 204-12 204	FCC 204	0.54
UCFCC 205-14 205-15 205 205-16	7/8 15/16 1														8	5/16	UC 205-14 205-15 205 205-16	FCC 205	0.78
UCFCC 206-18 206-19 206-20	1 1/8 1 3/16 1 1/4	30													10	3/8	UC 206-18 206-19 206-20	FCC 206	0.96
UCFCC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 17/16														10	3/8	UC 207-20 207-21 207-22 207 207-23	FCC 207	1.24
UCFCC 208-24 208-25 208	1 1/2 1 9/16														10	3/8	UC 208-24 208-25 208	FCC 208	1.66
UCFCC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4														12	7/16	UC 209-26 209-27 209-28 209	FCC 209	2.08
UCFCC 210-30 210-31 210	1 7/8 1 15/16														12	7/16	UC 210-30 210-31 210	FCC 210	2.24
UCFCC 211-32 211-34 211 211-35	2 2 1/8 2 3/16														16	5/8	UC 211-32 211-34 211 211-35	FCC 211	3.20
UCFCC 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16														16	5/8	UC 212-36 212 212-38 212-39	FCC 212	3.92

마름모플랜지형 볼베어링 유닛

UCFL2

(원통구멍형, 경(輕)하중용)

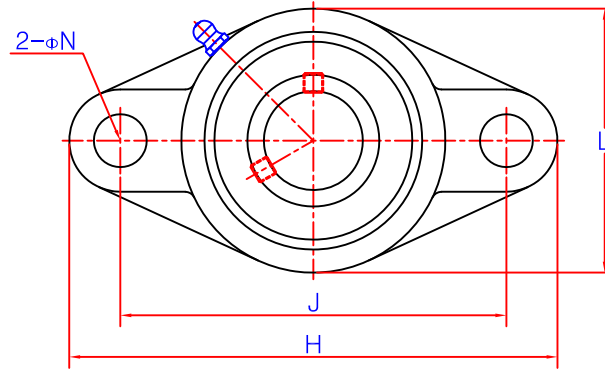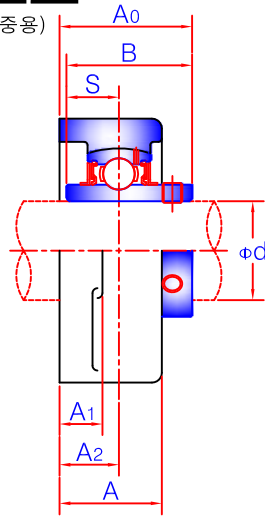

SL방식




L3방식

유닛 호칭번호	축지름 d		주요치수 (in./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCFL 201		12													UC 201		0.50
201-8	1/2	15													201-8		0.48
202															202		
202-10	5/8	17	47/16	23/8	1	335/64	15/32	7/16	19/32	15/16	1.2205	0.5000	10	3/8	202-10	FL 204	0.47
203			113	60	25.5	90	12	11	15	33.3	31.0	12.7			203		
204-12	3/4	20													204-12		0.45
204															204		
UCFL 205-14	7/8														UC 205-14		
205-15	15/16	25	51/8	211/16	11/16	357/64	5/8	1/2	5/8	113/32	1.3425	0.5630	14	1/2	205-15	FL 205	0.64
205			130	68	27	99	16	13	16	35.7	34.1	14.3			205		
205-16	1														205-16		
UCFL 206-18	11/8														UC 206-18		
206		30	513/16	35/32	17/32	439/64	5/8	1/2	45/64	119/32	1.5000	0.6260	14	1/2	206	FL 206	0.93
206-19	13/16		148	80	31	117	16	13	18	40.2	38.1	15.9			206-19		
206-20	11/4														206-20		
UCFL 207-20	11/4														UC 207-20		
207-21	15/16														207-21		
207-22	13/8	35	611/32	317/32	111/32	51/8	5/8	19/32	3/4	13/4	1.6890	0.6890	14	1/2	207-22	FL 207	1.2
207			161	90	34	130	16	15	19	44.4	42.9	17.5			207		
207-23	17/16														207-23		
UCFL 208-24	11/2														UC 208-24		
208-25	19/16	40	67/8	315/16	113/32	543/64	5/8	19/32	53/64	21/32	1.9370	0.7480	14	1/2	208-25	FL 208	1.6
208			175	100	36	144	16	15	21	51.2	49.2	19.0			208		
UCFL 209-26	15/8														UC 209-26		
209-27	111/16														209-27		
209-28	13/4	45	713/32	41/4	11/2	553/64	3/4	5/8	55/64	21/16	1.9370	0.7480	16	5/8	209-28	FL 209	1.9
209			188	108	38	148	19	16	22	52.2	49.2	19.0			209		
UCFL 210-30	17/8														UC 210-30		
210-31	115/16														210-31		
210		50	73/4	417/32	19/16	63/16	3/4	5/8	57/64	25/32	2.0315	0.7480	16	5/8	210	FL 210	2.2
210-32	2		197	115	40	157	19	16	22	54.6	51.6	19.0			210-32		
UCFL 211-32	2														UC 211-32		
211-34	21/8														211-34		
211		55	813/16	51/8	111/16	71/4	3/4	23/32	63/64	25/16	2.1890	0.8740	16	5/8	211	FL 211	3.3
211-35	23/16		224	130	43	184	19	18	25	58.4	55.6	22.2			211-35		
UCFL 212-36	21/4														UC 212-36		
212		60	927/32	51/2	17/8	761/64	29/32	23/32	19/64	523/32	2.5630	1.0000	20	3/4	212	FL 212	4.2
212-38	23/8		250	140	48	202	23	18	29	68.7	65.1	25.4			212-38		
212-39	27/16														212-39		
UCFL 213-40	21/2														UC 213-40		
213		65	105/32	63/32	131/32	817/64	29/32	7/8	13/16	23/4	2.5630	1.0000	20	3/4	213	FL 213	5.1
			258	155	50	210	23	22	30	69.7	65.1	25.4					
UCFL 214-44	23/4														UC 214-44		
214		70	1077/16	65/16	21/8	81/2	29/32	7/8	17/32	231/32	2.9370	1.1890	20	3/4	214	FL 214	5.7
			265	160	54	216	23	22	31	75.4	74.6	30.2					
UCFL 215-47	215/16														UC 215-47		
215		75	1013/16	61/2	27/32	855/64	29/32	7/8	111/32	33/32	3.0630	1.3110	20	3/4	215	FL 215	6.4
215-48	3		275	165	56	225	23	22	34	78.5	77.8	33.3			215-48		
UCFL 216		80	1113/32	73/32	29/32	911/64	63/64	25	7/8	111/32	33/32	1.3110	22	7/8	UC 216	FL 216	7.8
			290	180	58	233	25	22	34	83.3	82.6	33.3					
UCFL 217-52	31/4														UC 217-52		
217		85	12	715/32	215/32	949/64	63/64	15/16	127/64	37/16	3.3740	1.3425	22	7/8	217	FL 217	9.8
			305	190	63	248	25	24	36	87.6	85.7	34.1					
UCFL 218-56	31/2														UC 218-56		
218		90	1219/32	81/16	211/16	1077/16	63/64	15/16	137/64	325/32	3.7795	1.5630	22	7/8	218	FL 218	12.3
			320	205	68	265	25	24	40	96.3	96.0	39.7					

마름모플랜지형 볼베어링 유니트

UCFLX

(원통구멍형, 중(中)하중용)

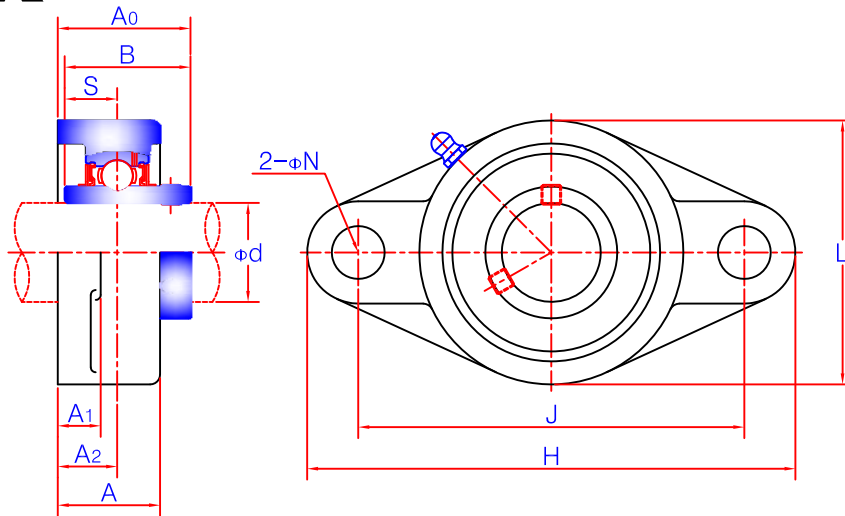


유 니 트 호칭번호	축 지 림		주 요 치 수 (In.) (mm)										설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																
	(in.)	(mm)	H	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCFL X05 X05-16	1	25	59/16 141	39/32 83	13/16 30	439/64 117	15/32 12	1/2 13	45/64 18	119/32 40.2	1.5000 38.1	0.6260 15.9	10	3/8	UC X05 X05-16	FL X05	1.1
UCFL X06 X06-19 X06-20	1 _{3/16} 1 _{1/4}	30	65/32 156	33/4 95	1 _{11/32} 34	51/8 130	5/8 16	19/32 15	3/4 19	13/4 44.4	1.6890 42.9	0.6890 17.5	14	1/2	UC X06 X06-19 X06-20	FL X06	1.5
UCFL X07-22 X07 X07-23	1 _{3/8} 1 _{7/16}	35	623/32 171	41/8 105	11/2 38	543/64 144	5/8 16	5/8 16	53/64 21	21/32 51.2	1.9370 49.2	0.7480 19.0	14	1/2	UC X07-22 X07 X07-23	FL X07	1.9
UCFL X08-24 X08	11/2	40	71/16 179	43/8 111	19/16 40	553/64 148	5/8 16	5/8 16	55/64 22	21/16 52.2	1.9370 49.2	0.7480 19.0	14	1/2	UC X08-24 X08	FL X08	2.1
UCFL X09-27 X09-28 X09	1 _{11/16} 1 _{3/4}	45	77/16 189	49/16 116	19/16 40	63/16 157	5/8 16	5/8 16	29/32 23	23/16 55.6	2.0315 51.6	0.7480 19.0	14	1/2	UC X09-27 X09-28 X09	FL X09	2.4
UCFL X10-31 X10 X10-32	1 _{15/16} 2	50	81/2 216	51/4 133	123/32 44	71/4 184	3/4 19	45/64 18	11/32 26	211/32 59.4	2.1890 55.6	0.8740 22.2	16	5/8	UC X10-31 X10 X10-32	FL X10	3.8

마름모플랜지형 볼베어링 유닛

UCFL3

(원통구멍형, 중(重)하중용)

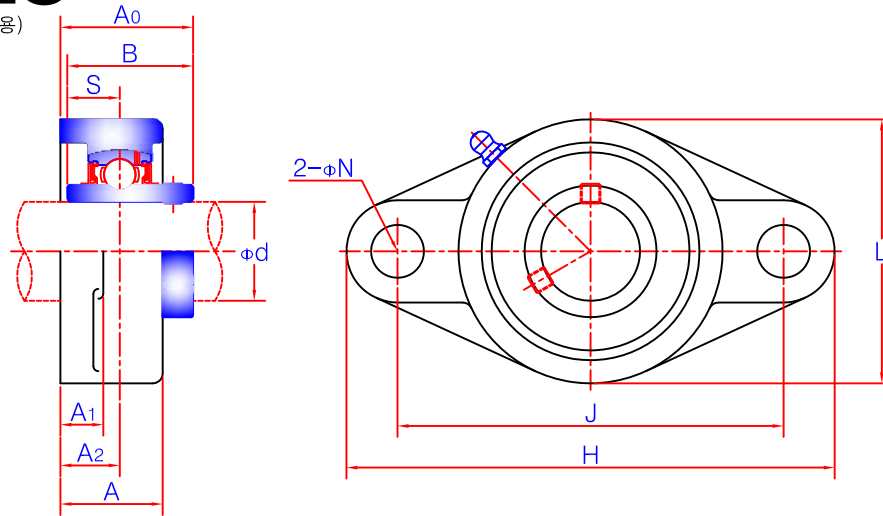


유닛 호칭번호	축지름		주요치수 (In./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCFL 305 305-16	1	25	529/32 150	35/32 80	15/32 29	429/64 113	3/4 19	1/2 13	5/8 16	117/32 39	1.4961 38	0.5906 15	16	5/8	UC 305 305-16	FL 305	1.1
UCFL 306-18 306	1 1/8	30	73/32 180	317/32 90	1 1/4 32	59/32 134	29/32 23	19/32 15	45/64 18	123/32 44	1.6929 43	0.6693 17	20	3/4	UC 306-18 306	FL 306	1.5
UCFL 307-20 307-22 307 307-23	1 1/4 1 3/8 1 7/16	35	79/32 185	315/16 100	1 13/32 36	535/64 141	29/32 23	5/8 16	25/32 20	115/16 49	1.8897 48	0.7480 19	20	3/4	UC 307-20 307-22 307 307-23	FL 307	1.8
UCFL 308-24 308	1 1/2	40	77/8 200	413/32 112	19/16 40	67/32 158	29/32 23	21/32 17	29/32 23	27/32 56	2.0472 52	0.7480 19.0	20	3/4	UC 308-24 308	FL 308	2.5
UCFL 309-28 309	1 3/4	45	91/16 230	429/32 125	123/32 44	631/32 177	23/32 25	18/32 18	63/64 25	23/8 60	2.2441 57	0.8661 22	22	7/8	UC 309-28 309	FL 309	3.5
UCFL 310-31 310	1 15/16	50	97/16 240	51/2 140	1 7/8 48	723/64 187	63/64 25	3/4 19	17/64 28	25/8 67	2.4015 61	0.8861 22	22	7/8	UC 310-31 310	FL 310	4.4
UCFL 311-32 311	2	55	927/32 250	529/32 150	2 1/16 52	761/64 198	63/64 25	25/32 20	13/16 30	225/32 71	2.5984 66	0.9842 25	22	7/8	UC 311-32 311	FL 311	5.3
UCFL 312		60	105/8 270	65/16 160	27/32 56	811/32 212	1 7/32 31	7/8 22	119/64 33	31/16 78	2.7953 71	1.0236 26	27	1	UC 312	FL 312	6.5
UCFL 313-40 313	2 1/2	65	115/8 295	67/8 175	29/32 58	929/64 240	17/32 31	1 25	119/64 33	31/16 78	2.9528 75	1.1811 30	27	1	UC 313-40 313	FL 313	8.5
UCFL 314-44 314	2 3/4	70	1213/32 315	79/32 185	213/32 61	927/32 250	13/8 35	13/32 28	127/64 36	33/16 81	3.0709 78	1.2992 33	30	1 1/8	UC 314-44 314	FL 314	9.7
UCFL 315 315-48	3	75	1219/32 320	711/16 195	219/32 66	1015/64 260	13/8 35	13/16 30	117/32 39	31/2 89	3.2283 82	1.2598 32	30	1 1/8	UC 315 315-48	FL 315	11.3
UCFL 316		80	1331/32 355	89/32 210	211/16 68	117/32 285	1 1/2 38	1 1/4 32	1 1/2 38	317/32 90	3.3858 86	1.3386 34	33	1 1/4	UC 316	FL 316	14.4
UCFL 317		85	149/16 370	821/32 220	229/32 74	1113/16 300	1 1/2 38	1 1/4 32	1 1/4 44	315/16 100	3.7795 96	1.5748 40	33	1 1/4	UC 317	FL 317	16.0
UCFL 318-56 318	3 1/2	90	155/32 385	91/4 235	3 76	1213/32 315	1 1/2 38	1 13/32 36	1 1/2 44	315/16 100	3.7795 96	1.5748 40	33	1 1/4	UC 318-56 318	FL 318	19.0
UCFL 319		95	1515/16 405	927/32 250	311/16 94	13 330	1 39/64 41	19/16 40	221/64 59	43/4 121	4.0551 103	1.6142 41	36	1 3/8	UC 319	FL 319	29.4
UCFL 320 320-64	4	100	175/16 440	105/8 270	311/16 94	1411/64 360	1 47/64 44	19/16 40	221/64 59	429/32 125	4.2519 108	1.6535 42	39	1 1/2	UC 320 320-64	FL 320	29.4
UCFL 321		105	175/16 440	105/8 270	311/16 94	143/32 360	1 47/64 44	19/16 40	25/16 59	5 127	4.4094 112	1.7323 44	39	1 1/2	UC 321	FL 321	30.2
UCFL 322		110	181/2 470	1113/16 300	325/32 96	1523/64 390	1 47/64 44	1 21/32 42	223/64 60	55/32 131	4.6063 117	1.8110 46	39	1 1/2	UC 322	FL 322	36.2
UCFL 324		120	2015/32 520	13 330	411/32 110	1659/64 430	1 27/32 47	1 7/8 48	29/16 65	51/2 140	4.9606 126	2.0079 51	42	1 5/8	UC 324	FL 324	51.6
UCFL 326		130	2121/32 550	143/16 360	417/32 115	187/64 460	1 27/32 47	1 31/32 50	29/16 65	53/4 146	5.3150 135	2.1260 54	42	1 5/8	UC 326	FL 326	61.6
UCFL 328		140	235/8 600	153/4 400	429/32 125	1911/16 500	2 51	2 3/8 60	261/64 75	611/32 161	5.7086 145	2.3228 59	45	1 3/4	UC 328	FL 328	68.4

테이크-업형 볼베어링 유니트

UCT2

(원통구멍형, 경(輕)하중용)

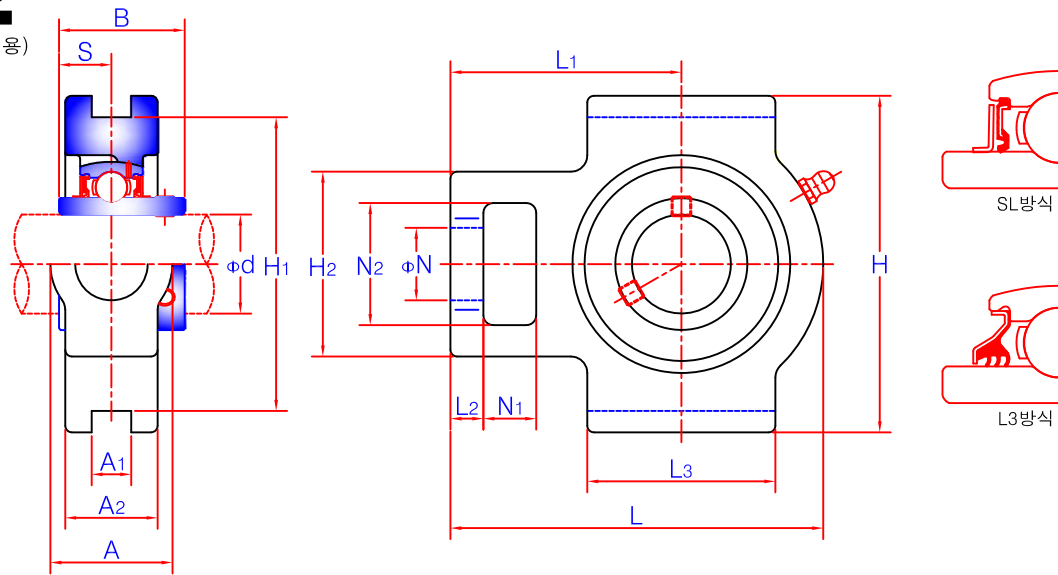


유니트 호칭번호	축지름 d		주요치수 (in.) (mm)															베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	A	A1	A2	H	H1	H2	L	L1	L2	L3	N	N1	N2	B	S	호칭번호	호칭번호	
UCT 201-8 202-10 203-12 204	1/2 5/8 3/4	12 15 17 20																UC 201-8 202-10 203-12 204	T 204	0.81 0.79 0.78 0.76
UCT 205-14 205-15 205-16	7/8 15/16 1	25	1 1/4 32	15/32 12	15/16 24	3 1/2 89	2 63/64 76	2 51	3 11/16 94	2 13/32 61	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	1.2205 31.0	0.5000 12.7	UC 205-14 205-15 205-16	T 205	0.84
UCT 206-18 206-19 206-20	1 1/8 1 3/16 1 1/4	30	1 15/32 37	15/32 12	1 3/32 28	4 1/32 102	3 1/2 89	2 7/32 56	4 7/16 113	2 3/4 70	13/32 10	2 1/4 57	55/64 22	5/8 16	1 15/32 37	1.5000 38.1	0.6260 15.9	UC 206-18 206-19 206-20	T 206	1.3
UCT 207-20 207-21 207-22 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1 15/32 37	15/32 12	1 3/16 30	4 1/32 102	3 1/2 89	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	55/64 22	5/8 16	1 15/32 37	1.6890 42.9	1.6890 17.5	UC 207-20 207-21 207-22 207-23	T 207	1.6
UCT 208-24 208-25 208	1 1/2 1 9/16	40	1 15/16 49	5/8 16	1 5/16 33	4 1/2 114	4 1/64 102	3 9/32 83	5 21/32 144	3 15/32 88	5/8 16	3 9/32 83	1 9/64 29	3/4 19	1 15/16 49	1.9370 49.2	0.7480 19.0	UC 208-24 208-25 208	T 208	2.5
UCT 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	1 15/16 49	5/8 16	1 3/8 35	4 19/32 117	4 1/64 102	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	1 9/64 29	3/4 19	1 15/16 49	1.9370 49.2	0.7480 19.0	UC 209-26 209-27 209-28 209	T 209	2.4
UCT 210-30 210-31 210-32	1 7/8 1 15/16 2	50	1 15/16 49	5/8 16	1 15/32 37	4 19/32 117	4 1/64 102	3 9/32 83	5 7/8 149	3 17/32 90	5/8 16	3 3/8 86	1 9/64 29	3/4 19	1 15/16 49	2.0315 51.6	0.7480 19.0	UC 210-30 210-31 210-32	T 210	2.6
UCT 211-32 211-34 211-35	2 2 1/8 2 3/16	55	2 17/32 64	55/64 22	1 1/2 38	5 3/8 146	5 1/8 130	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	1 25	2 17/32 64	2.1890 55.6	0.8740 22.2	UC 211-32 211-34 211-35	T 211	4.0
UCT 212-36 212-38 212-39	2 1/4 2 3/8 2 7/16	60	2 17/32 64	55/64 22	1 21/32 42	5 3/8 146	5 1/8 130	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2.5630 65.1	1.0000 25.4	UC 212-36 212-38 212-39	T 212	4.9
UCT 213-40 213	2 1/2	65	2 3/4 70	1 1/32 26	1 23/32 44	6 9/16 167	5 15/16 151	4 3/8 111	8 13/16 224	5 13/32 137	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	2.5630 65.1	1.0000 25.4	UC 213-40 213	T 213	6.9
UCT 214-44 214	2 3/4	70	2 3/4 70	1 1/32 26	1 13/16 46	6 9/16 167	5 15/16 151	4 3/8 111	8 13/16 224	5 13/32 137	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	2.9370 74.6	1.1890 30.2	UC 214-44 214	T 214	7.0
UCT 215-47 215-48	2 15/16 3	75	2 3/4 70	1 1/32 26	1 7/8 48	6 9/16 167	5 15/16 151	4 3/8 111	9 1/8 232	5 1/2 140	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	3.0630 77.8	1.3110 33.3	UC 215-47 215-48	T 215	7.3
UTC 216		80	2 3/4 70	1 1/32 26	2 51	7 1/4 184	6 1/2 165	4 3/8 111	9 1/4 235	5 1/2 140	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	3.2520 82.6	1.3110 33.3	UC 216	T 216	8.2
UCT 217-52 217	3 1/4	85	2 7/8 73	1 3/16 30	2 1/8 54	7 25/32 198	6 13/16 173	4 7/8 124	10 1/4 260	6 3/8 162	1 5/32 29	6 3/16 157	1 57/64 48	1 1/2 38	2 7/8 73	3.3740 85.7	1.3425 34.1	UC 217-52 217	T 217	11.0

테이크-업형 볼베어링 유니트

UCTX

(원통구멍형, 중(中)하중용)

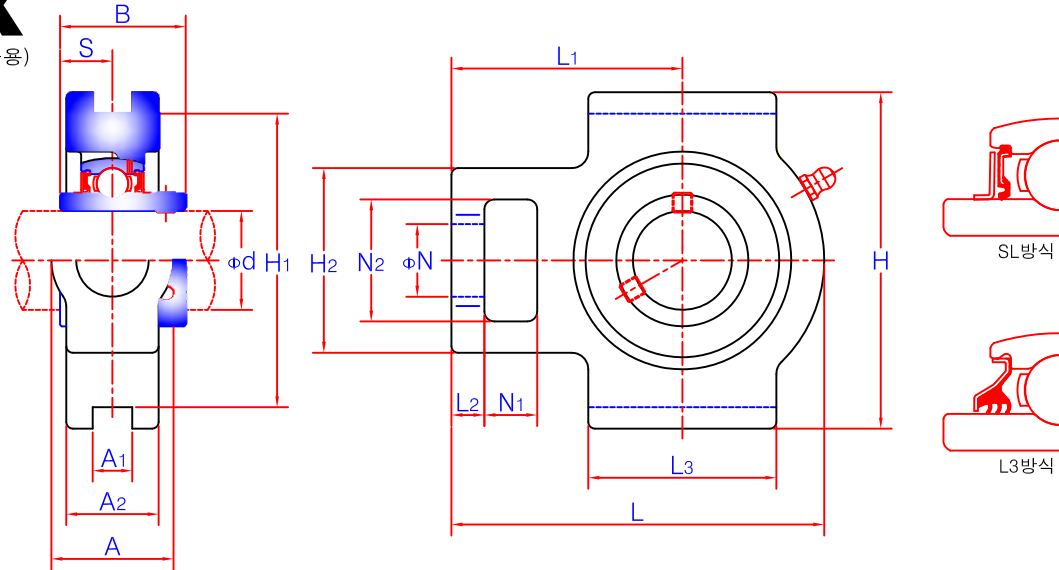


유니트 호칭번호	축지름 d		주요치수 (in.) (mm)															베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	A	A1	A2	H	H1	H2	L	L1	L2	L3	N	N1	N2	B	S			
UC X05 X05-16	1	25	1 ¹⁵ / ₃₂ 37	1 ⁵ / ₃₂ 12	1 ³ / ₃₂ 28	4 ¹ / ₃₂ 102	3 ¹ / ₂ 89	2 ⁷ / ₃₂ 56	4 ⁷ / ₁₆ 113	2 ³ / ₄ 70	1 ³ / ₃₂ 10	2 ¹ / ₄ 57	5 ⁵ / ₆₄ 22	5 ⁸ / ₁₆ 16	1 ¹⁵ / ₃₂ 37	1.5000 38.1	0.6260 15.9	UC X05 X05-16	T X05	1.4
UC X06 X06-19 X06-20	1 ³ / ₁₆ 1 ¹ / ₄	30	1 ¹⁵ / ₃₂ 37	1 ⁵ / ₃₂ 12	1 ³ / ₁₆ 30	4 ¹ / ₃₂ 102	3 ¹ / ₂ 89	2 ¹⁷ / ₃₂ 64	5 ³ / ₃₂ 129	3 ¹ / ₁₆ 78	1 ¹ / ₂ 13	2 ¹⁷ / ₃₂ 64	5 ⁵ / ₆₄ 22	5 ⁸ / ₁₆ 16	1 ¹⁵ / ₃₂ 37	1.6890 42.9	0.6890 17.5	UC X06 X06-19 X06-20	T X06	1.7
UC X07-22 X07	1 ³ / ₈ 1 ⁷ / ₁₆	35	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹³ / ₃₂ 36	4 ¹ / ₂ 114	4 ¹ / ₆₄ 102	3 ⁹ / ₃₂ 83	5 ²¹ / ₃₂ 144	3 ¹⁵ / ₃₂ 88	1 ⁹ / ₃₂ 15	3 ⁹ / ₃₂ 83	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	1.9370 49.2	0.7480 19.0	UC X07-22 X07	T X07	2.7
UC X08-24 X08	1 ¹ / ₂	40	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹³ / ₃₂ 36	4 ¹⁹ / ₃₂ 117	4 ¹ / ₂ 102	3 ⁹ / ₃₂ 83	5 ²¹ / ₃₂ 144	3 ⁷ / ₁₆ 87	1 ⁹ / ₃₂ 15	3 ⁹ / ₃₂ 83	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	1.9370 49.2	0.7480 19.0	UC X08-24 X08	T X08	2.6
UC X09-27 X09-28 X09	1 ¹¹ / ₁₆ 1 ³ / ₄	45	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹ / ₂ 38	4 ¹⁹ / ₃₂ 117	4 ¹ / ₆₄ 102	3 ⁹ / ₃₂ 83	5 ⁷ / ₈ 149	3 ¹⁷ / ₃₂ 90	5 ⁸ / ₁₆ 16	3 ³ / ₈ 86	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	2.0315 51.6	0.7480 19.0	UC X09-27 X09-28 X09	T X09	2.9
UC X10-31 X10 X10-32	1 ¹⁵ / ₁₆ 2	50	2 ¹⁷ / ₃₂ 64	5 ⁵ / ₆₄ 22	1 ²¹ / ₃₂ 42	5 ³ / ₄ 146	5 ¹ / ₈ 130	4 ¹ / ₃₂ 102	6 ²³ / ₃₂ 171	4 ³ / ₁₆ 106	3 ³ / ₄ 19	3 ³ / ₄ 95	1 ³ / ₈ 35	1 25	2 ¹⁷ / ₃₂ 64	2.1890 55.6	0.8740 22.2	UC X10-31 X10 X10-32	T X10	4.4
UC X11 X11-35 X11-36	2 ³ / ₁₆ 2 ¹ / ₄	55	2 ¹⁷ / ₃₂ 64	5 ⁵ / ₆₄ 22	1 ²¹ / ₃₂ 42	5 ³ / ₄ 146	5 ¹ / ₈ 130	4 ¹ / ₃₂ 102	7 ⁵ / ₈ 194	4 ¹¹ / ₁₆ 119	3 ⁴ / ₄ 19	4 ¹ / ₃₂ 102	1 ³ / ₈ 35	1 ¹ / ₄ 32	2 ¹⁷ / ₃₂ 64	2.5630 65.1	1.0000 25.4	UC X11 X11-35 X11-36	T X11	5.3
UC X12 X12-38 X12-39	2 ³ / ₈ 2 ⁷ / ₁₆	60	2 ³ / ₄ 70	1 ¹ / ₃₂ 26	1 ⁷ / ₈ 48	6 ⁹ / ₁₆ 167	5 ¹⁵ / ₁₆ 151	4 ³ / ₈ 111	8 ¹³ / ₁₆ 224	5 ¹³ / ₃₂ 137	1 ³ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	2.5630 65.1	1.0000 25.4	UC X12 X12-38 X12-39	T X12	7.4
UC X13-40 X13	2 ¹ / ₂	65	2 ³ / ₄ 70	1 ¹ / ₃₂ 26	1 ⁷ / ₈ 48	6 ⁹ / ₁₆ 167	5 ¹⁵ / ₁₆ 151	4 ³ / ₈ 111	8 ¹³ / ₁₆ 224	5 ¹³ / ₃₂ 137	1 ³ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	2.9370 74.6	1.1890 30.2	UC X13-40 X13	T X13	7.6
UC X14-44 X14	2 ³ / ₄	70	2 ³ / ₄ 70	1 ¹ / ₃₂ 26	1 ⁷ / ₈ 48	6 ⁹ / ₁₆ 167	5 ¹⁵ / ₁₆ 151	4 ³ / ₈ 111	9 ¹ / ₈ 232	5 ¹ / ₂ 140	1 ³ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	3.0630 77.8	1.3110 33.3	UC X14-44 X14	T X14	7.9
UC X15 X15-48	3	75	2 ³ / ₄ 70	1 ⁷ / ₆₄ 28	1 ⁷ / ₈ 48	7 ¹ / ₄ 184	6 ¹ / ₂ 165	4 ⁴ / ₈ 111	9 ¹ / ₄ 235	5 ¹ / ₂ 140	1 ³ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	3.2520 82.6	1.3110 33.3	UC X15 X15-48	T X15	8.7
UC X16		80	2 ⁷ / ₈ 73	1 ⁷ / ₆₄ 28	2 ¹ / ₈ 54	7 ²⁵ / ₃₂ 198	6 ¹³ / ₁₆ 173	4 ⁷ / ₈ 124	10 ¹ / ₄ 260	6 ³ / ₈ 162	1 ³ / ₃₂ 28	6 ³ / ₁₆ 157	1 ⁵⁷ / ₆₄ 48	1 ¹ / ₂ 38	2 ⁷ / ₈ 73	3.3740 85.7	1.3425 34.1	UC X16	T X16	11.7
UC X17		85	2 ⁷ / ₈ 73	1 ⁷ / ₆₄ 28	2 ¹ / ₈ 54	7 ²⁵ / ₃₂ 198	6 ¹³ / ₁₆ 173	4 ⁷ / ₈ 124	10 ¹ / ₄ 260	6 ³ / ₈ 162	1 ³ / ₃₂ 28	6 ³ / ₁₆ 157	1 ⁵⁷ / ₆₄ 48	1 ¹ / ₂ 38	2 ⁷ / ₈ 73	3.7795 96.0	1.5630 39.7	UC X17	T X17	11.7

테이크-업형 볼베어링 유니트

UCT3

(원통구멍형, 중(重)하중용)



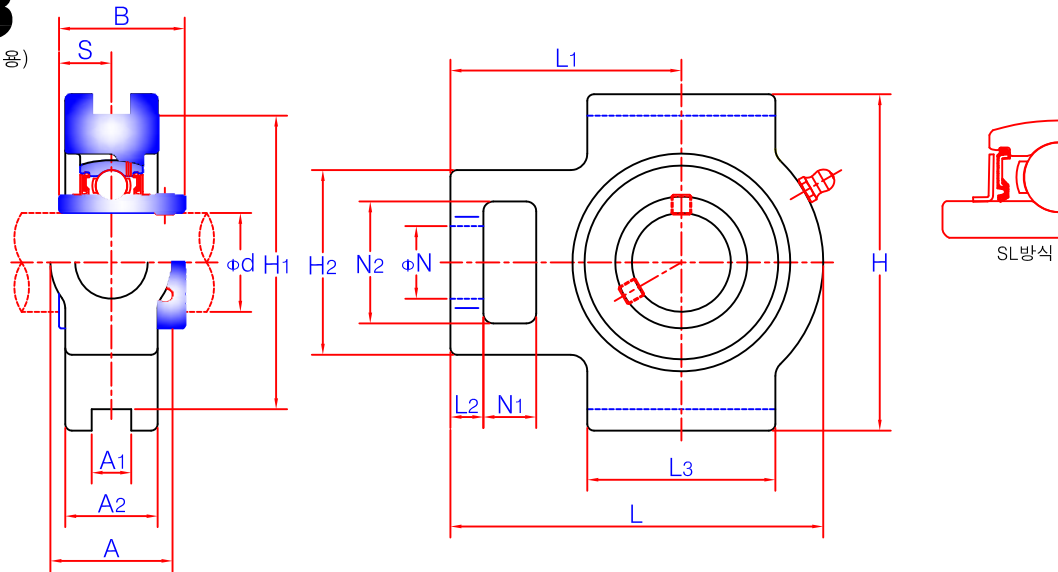


유니트 호칭번호	축지름		주요치수 (in.) (mm)															베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																			
	(in.)	(mm)	A	A ₁	A ₂	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	N ₂	B	S			
UCT 305 305-16	1	25	1 13/32 36	15/32 12	1 1/32 26	3 1/2 89	35/32 80	27/16 62	4 13/16 122	3 76	15/32 12	29/16 65	1 1/32 26	5/8 16	1 13/32 36	1.4961 38	0.5906 15	UC 305 305-16	T 305	1.4
UCT 306-18 306	1 1/8	30	1 5/8 41	5/8 16	1 3/32 28	3 15/16 100	35/64 90	23/4 70	5 13/32 137	3 11/32 85	9/16 14	29/32 74	1 7/64 28	23/32 18	1 5/8 41	1.6929 43	0.6693 17	UC 306-18 306	T 306	1.8
UCT 307-20 307-22 307 307-23	1 1/4 3/8 1 7/16	35	1 25/32 45	5/8 16	1 1/4 32	4 3/8 111	3 15/16 100	2 15/16 75	5 29/32 150	3 11/16 94	19/32 15	35/32 80	1 3/16 30	25/32 20	1 25/32 45	1.8897 48	0.7480 19	UC 307-20 307-22 307 307-23	T 307	2.3
UCT 308-24 308	1 1/2	40	1 31/32 50	45/64 18	1 11/32 34	4 7/8 124	4 13/32 112	3 9/32 83	6 3/8 162	3 15/16 100	21/32 17	3 1/2 89	1 17/64 32	7/8 22	1 31/32 50	2.0472 52	0.7480 19	UC 308-24 308	T 308	3.0
UCT 309-28 309	1 3/4	45	2 5/32 55	45/64 18	1 1/2 38	5 7/16 138	4 59/64 125	3 17/32 90	7 7/8 178	4 11/32 110	23/32 18	3 13/16 97	1 11/32 34	15/16 24	2 5/32 55	2.2441 57	0.8661 22	UC 309-28 309	T 309	4.1
UCT 310-31 310	1 15/16	50	2 13/32 61	25/32 20	1 9/16 40	5 15/16 151	5 33/64 140	3 27/32 98	7 17/32 191	4 19/32 117	25/32 20	4 3/16 106	1 29/64 37	1 1/16 24	2 13/32 61	2.4015 61	0.8661 22	UC 310-31 310	T 310	4.9
UCT 311-32 311	2	55	2 19/32 66	55/64 22	1 23/32 44	6 13/32 163	5 29/32 150	4 1/8 105	8 5/32 207	5 127	13/16 21	4 17/32 115	1 17/32 39	1 5/32 29	2 19/32 66	2.5984 66	0.9842 25	UC 311-32 311	T 311	6.1
UCT 312		60	2 25/32 71	55/64 22	1 13/16 46	7 178	6 19/64 160	4 7/16 113	8 21/32 220	5 5/16 135	29/32 23	4 27/32 123	1 39/64 41	1 7/32 31	2 25/32 71	2.7953 71	1.0236 26	UC 312	T 312	7.6
UCT 313-40 313	2 1/2	65	3 5/32 80	1 1/32 26	1 31/32 50	7 15/32 190	6 11/16 170	4 9/16 116	9 3/8 238	5 3/4 146	1 25	5 9/32 134	1 11/16 43	1 1/4 32	2 25/32 71	2.9528 75	1.1811 30	UC 313-40 313	T 313	9.3
UCT 314-44 314	2 3/4	70	3 17/32 90	1 1/32 26	2 1/16 52	7 15/16 202	7 3/32 180	5 1/8 130	9 29/32 252	6 3/32 155	1 25	5 1/2 140	1 13/16 46	1 13/32 36	3 11/32 85	3.0709 78	1.2992 33	UC 314-44 314	T 314	11.1
UCT 315 315-48		75	3 17/32 90	1 1/32 26	2 5/32 55	8 1/2 216	7 9/16 192	5 3/16 132	10 5/16 262	6 5/16 160	1 25	5 29/32 150	1 13/16 46	1 13/32 36	3 11/32 85	3.2283 82	1.2598 32	UC 315 315-48	T 315	13
UCT 316		80	4 1/32 102	1 3/16 30	2 3/8 60	9 1/16 230	8 1/32 204	5 29/32 150	11 3/32 282	6 27/32 174	13/32 28	6 5/16 160	2 3/32 53	1 21/32 42	3 27/32 98	3.3858 86	1.3386 34	UC 316	T 316	16.2
UCT 317		85	4 1/32 102	1 17/64 32	2 17/32 64	9 7/16 240	8 27/64 214	5 31/32 152	11 23/32 298	7 7/32 183	13/16 30	6 11/16 170	2 3/32 53	1 21/32 42	3 27/32 98	3.7795 96	1.5748 40	UC 317	T 317	19
UCT 318-56 318	3 1/2	90	4 11/32 110	1 17/64 32	2 19/32 66	10 1/32 255	8 31/32 228	5 5/16 260	12 9/32 312	7 9/16 192	13/16 30	6 7/8 175	2 1/4 57	1 13/16 46	4 3/16 106	3.7795 96	1.5748 40	UC 318-56 318	T 318	21.6
UCT 319		95	4 11/32 110	1 3/8 35	2 27/32 72	10 5/8 270	9 29/64 240	6 1/2 165	12 11/16 322	7 3/4 197	17/32 31	7 3/32 180	2 1/4 57	1 13/16 46	4 3/16 106	4.0551 103	1.6142 41	UC 319	T 319	24.9
UCT 320 320-64		100	4 23/32 120	1 3/8 35	2 15/16 75	11 13/32 290	10 15/64 260	6 7/8 175	13 19/32 345	8 9/32 210	1 1/4 32	7 7/8 200	2 21/64 59	1 7/8 48	4 17/32 115	4.2519 108	1.6535 42	UC 320 320-64	T 320	30.7
UCT 321		105	4 23/32 120	1 3/8 35	2 15/16 75	11 13/32 290	10 15/64 260	6 7/8 175	13 19/32 345	8 9/32 210	1 1/4 32	7 7/8 200	2 21/64 59	1 7/8 48	4 17/32 115	4 13/32 112	1 47/64 44	UC 321	T 321	36.7
UCT 322		110	5 1/8 130	1 1/2 38	3 5/32 80	12 19/32 320	11 7/32 285	7 9/32 185	15 5/32 385	9 1/4 235	1 1/2 38	8 5/32 215	2 9/16 65	2 1/16 52	4 29/32 125	4.6063 117	1.8110 46	UC 322	T 322	39.7
UCT 324		120	5 1/2 140	1 49/64 45	3 17/32 90	13 31/32 355	12 19/32 320	8 9/32 210	4 17 432	10 1/2 267	1 21/32 42	9 1/16 230	2 3/4 70	2 3/8 60	5 1/2 140	4.9606 126	2.0079 51	UC 324	T 324	54.4
UCT 326		130	5 29/32 150	1 31/32 50	3 15/16 100	15 5/32 385	13 25/32 350	8 21/32 220	18 5/16 465	11 7/32 285	1 25/32 45	9 7/16 240	2 61/64 75	2 9/16 65	5 29/32 150	5.3150 135	2.1260 54	UC 326	T 326	69.3
UCT 328		140	6 3/32 155	1 31/32 50	3 15/16 100	16 11/32 415	14 61/64 380	9 1/16 230	20 9/32 515	12 13/32 315	1 31/32 50	10 1/32 255	3 5/32 80	2 3/4 70	6 5/16 160	5.7086 145	2.3228 59	UC 328	T 328	85.1

카트릿지형 볼베어링 유니트

UCC2

(원통구멍형, 경(輕)하중용)

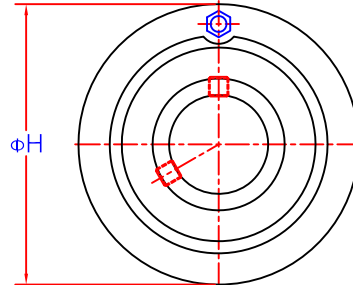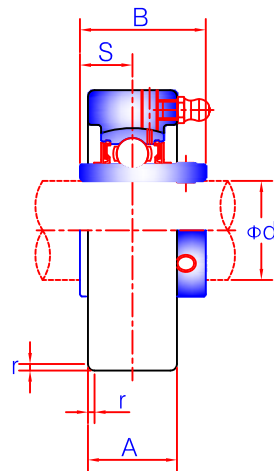

SL방식






L3방식

유니트 호칭번호	축지름		주요치수 (in./mm)					베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	A	r	B	S			
UCC 201		12			1.5			UC 201		0.52
201-8	1/2							201-8		
202		15	2.8346	25/32	1.5	1.2205	0.5000	202	C 204	0.50
202-10	5/8		72	20		31.0	12.7	202-10		0.49
203		17			1.5			203		
204-12	3/4							204-12		
204		20			1.5			204		0.47
UCC 205-14	7/8							UC 205-14		
205-15	15/16		3.1496	55/64	1.5	1.3425	0.5630	205-15	C 205	0.64
205		25	80	22		34.1	14.3	205		
205-16	1							205-16		
UCC 206-18	1 1/8							UC 206-18		
206		30	3.3465	1 1/16	1.5	1.5000	0.6260	206	C 206	0.81
206-19	1 3/16		85	27		38.1	15.9	206-19		
206-20	1 1/4							206-20		
UCC 207-20	1 1/4							UC 207-20		
207-21	1 15/16		3.5433	1 7/64	2	1.6890	0.6890	207-21	C 207	0.93
207-22	1 3/8		90	28		42.9	17.5	207-22		
207		35						207		
207-23	1 7/16							207-23		
UCC 208-24	1 1/2							UC 208-24		
208-25	1 9/16		3.9370	1 3/16	2	1.9370	0.7480	208-25	C 208	1.2
208		40	100	30		49.2	19.0	208		
UCC 209-26	1 5/8							UC 209-26		
209-27	1 11/16		4.3307	1 7/32	2	1.9370	0.7480	209-27	C 209	1.5
209-28	1 3/4		110	31		49.2	19.0	209-28		
209		45						209		
UCC 210-30	1 7/8							UC 210-30		
210-31	1 15/16		4.7244	1 9/64	2	2.0315	0.7480	210-31	C 210	2.0
210		50	120	33		51.6	19.0	210		
210-32	2							210-32		
UCC 211-32	2							UC 211-32		
211-34	2 1/8		4.9213	1 3/8	2.5	2.1890	0.8740	211-34	C 211	2.2
211		55	125	35		55.6	22.2	211		
211-35	2 3/16							211-35		
UCC 212-36	2 1/4							UC 212-36		
212		60	5.1181	1 1/2	2.5	2.5630	1.0000	212	C 212	2.6
212-38	2 3/8		130	38		65.1	25.4	212-38		
212-39	2 7/16							212-39		
UCC 213-40	2 1/2							UC 213-40		
213		65	5.5118	1 37/64	2.5	2.5630	1.0000	213	C 213	3.0
			140	40		65.1	25.4			

카트릿지형 볼베어링 유니트

UCCX

(원통구멍형, 중(中)하중용)

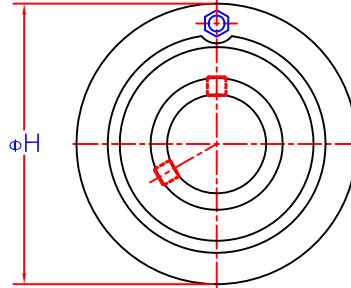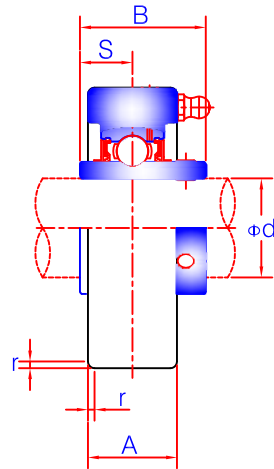

SL방식






L3방식

유 니 트 호칭번호	축 지 름		주 요 치 수 (In.) (mm)					베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d									
	(in.)	(mm)	H	A	r	B	S			
UCC X05 X05-16	1	25	3.5433 90	1 _{1/16} 27	1.5	1.5000 38.1	0.6260 15.9	UC X05 X05-16	C X05	1.0
UCC X06 X06-19 X06-20	1 _{3/16} 1 _{1/4}	30	3.9370 100	1 _{3/16} 30	2	1.6890 42.9	0.6890 17.5	UC X06 X06-19 X06-20	C X06	1.3
UCC X07-22 X07 X07-23	1 _{3/8} 1 _{7/16}	35	4.3307 110	1 _{11/32} 34	2	1.9370 49.2	0.7480 19.0	UC X07-22 X07 X07-23	C X07	1.7
UCC X08-24 X08	1 _{1/2}	40	4.7244 120	1 _{1/2} 38	2	1.9370 49.2	0.7480 19.0	UC X08-24 X08	C X08	2.1
UCC X09-27 X09-28 X09	1 _{11/16} 1 _{3/4}	45	4.7244 120	1 _{1/2} 38	2	2.0315 51.6	0.7480 19.0	UC X09-27 X09-28 X09	C X09	2.2
UCC X10-31 X10 X10-32	1 _{15/16} 2	50	5.1181 130	1 _{37/64} 40	2.5	2.1890 55.6	0.8740 22.2	UC X10-31 X10 X10-32	C X10	2.8
UCC X11 X11-35 X11-36	2 _{3/16} 2 _{1/4}	55	5.9055 150	1 _{21/32} 42	2.5	2.5630 65.1	1.0000 25.4	UC X11 X11-35 X11-36	C X11	4.0
UCC X12 X12-38 X12-39	2 _{3/8} 2 _{7/16}	60	6.2992 160	1 _{47/64} 44	2.5	2.5630 65.1	1.0000 25.4	UC X12 X12-38 X12-39	C X12	4.6

카트릿지형 볼베어링 유니트

UCC3

(원통구멍형, 중(重)하중용)

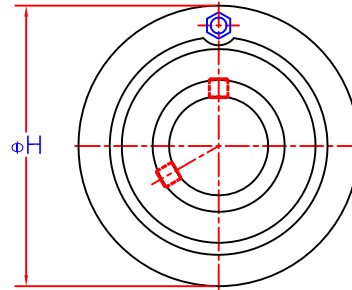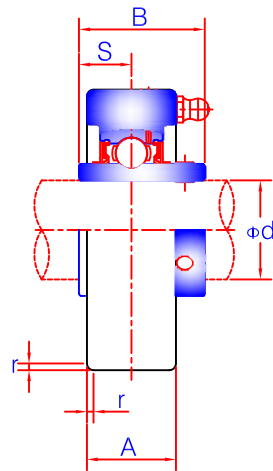


SL 방식

유니트 호칭번호	축지름 d		주요치수 (In./mm)					베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	A	r	B	S			
UCC 305 305-16	1	25	3.5433 90	1 _{1/32} 26	2	1.4961 38	0.5906 15	UC 305 305-16	C 305	1.5
UCC 306-18 306	1 _{1/8}	30	3.9370 100	1 _{7/64} 28	2	1.6929 43	0.6693 17	UC 306-18 306	C 306	1.7
UCC 307-20 307-22 307 307-23	1 _{1/4} 1 _{3/8} 1 _{7/16}	35	4.3307 110	1 _{17/64} 32	3	1.8897 48	0.7480 19	UC 307-20 307-22 307 307-23	C 307	2.2
UCC 308-24 308	1 _{1/2}	40	4.7244 120	1 _{11/32} 34	3	2.0472 52	0.7480 19	UC 308-24 308	C 308	2.2
UCC 309-28 309	1 _{3/4}	45	5.1181 130	1 _{1/2} 38	3	2.2441 57	0.8661 22	UC 309-28 309	C 309	2.8
UCC 310-31 310	1 _{15/16}	50	5.5118 140	1 _{37/64} 40	3	2.4015 61	0.8661 22	UC 310-31 310	C 310	3.2
UCC 311-32 311	2	55	5.9055 150	1 _{47/64} 44	3	2.5984 66	0.9842 25	UC 311-32 311	C 311	3.9
UCC 312		60	6.2992 160	1 _{13/16} 46	3	2.7953 71	1.0236 26	UC 312	C 312	4.8
UCC 313-40 313	2 _{1/2}	65	6.6929 170	1 _{31/32} 50	3	2.9528 75	1.1811 30	UC 313-40 313	C 313	5.7
UCC 314-44 314	2 _{3/4}	70	7.0866 180	1 _{3/64} 52	3	3.0709 78	1.2992 33	UC 314-44 314	C 314	6.7
UCC 315 315-48	3	75	7.4803 190	2 _{11/64} 55	4	3.2283 82	1.2598 32	UC 315 315-48	C 315	7.8
UCC 316		80	7.8740 200	2 _{23/64} 60	4	3.3858 86	1.3386 34	UC 316	C 316	9.2
UCC 317		85	8.4646 215	2 _{33/64} 64	4	3.7795 96	1.5748 40	UC 317	C 317	11.7
UCC 318-56 318	3 _{1/2}	90	8.8583 225	2 _{19/32} 66	4	3.7795 96	1.5748 40	UC 318-56 318	C 318	13.1
UCC 319		95	9.4488 240	2 _{53/64} 72	4	4.0551 103	1.6142 41	UC 319	C 319	15.8
UCC 320 320-64	4	100	10.2362 260	2 _{61/64} 75	4	4.2519 108	1.6535 42	UC 320 320-64	C 320	19.6
UCC 321		105	10.2362 260	2 _{61/64} 75	4	4.4094 112	1.7323 44	UC 321	C 321	27.0
UCC 322		110	11.8110 300	3 _{5/32} 80	5	4.6063 117	1.8110 46	UC 322	C 322	29.2
UCC 324		120	12.5984 320	3 _{35/64} 90	5	4.9606 126	2.0079 51	UC 324	C 324	35.9
UCC 326		130	13.3858 340	3 _{15/16} 100	6	5.3150 135	2.1260 54	UC 326	C 326	43.0
UCC 328		140	14.1732 360	3 _{15/16} 100	6	5.7086 145	2.3228 59	UC 328	C 328	52.9

중심높임 필로우형 볼베어링 유니트

UCPH2

(원통구멍형, 경(輕)하중용)



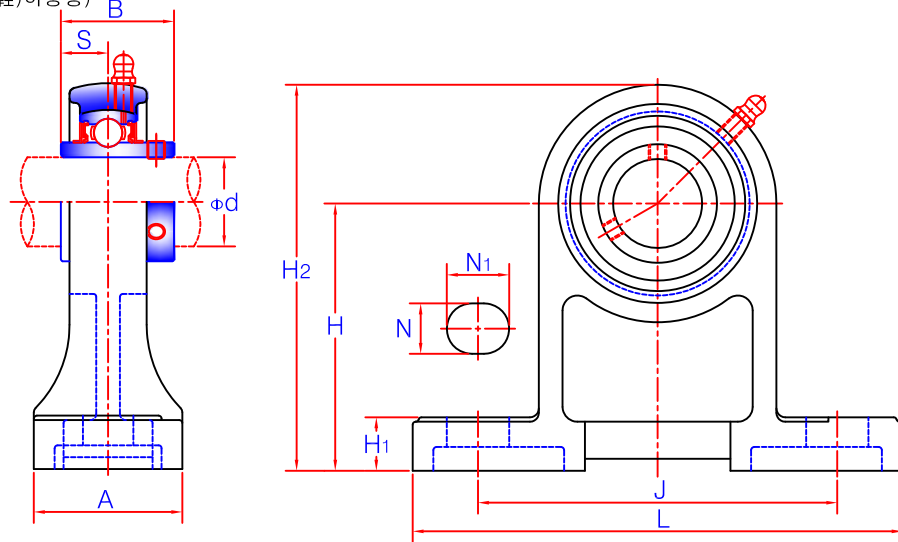


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)										설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																
	(in.)	(mm)	H	L	A	J	N	N ₁	H ₁	H ₂	B	S	(mm)	(in.)			
UCPH 201		12													UC 201		0.96
201-8	1/2	15													201-8		
202		15	2 _{3/4}	5	1 _{9/16}	3 _{3/4}	1 ₂	3 ₄	19 ₃₂	3 _{31/32}	1.2205	0.5000	10	3/8	202	PH 204	0.94
202-10	5/8	17	70	127	40	95	13	19	15	101	31.0	12.7			202-10		0.93
203		17													203		
204-12	3/4	20													204-12		0.91
204		20													204		
UCPH 205-14	7/8														UC 205-14		
205-15	15/16	25	3 _{5/32}	5 _{1/2}	1 _{31/32}	4 _{1/8}	1 ₂	3 ₄	5/8	4 _{1/2}	1.3425	0.5630	10	3/8	205-15	PH 205	1.2
205		25	80	140	50	105	13	19	16	114	34.1	14.3			205		
205-16	1														205-16		
UCPH 206-18	1 _{1/8}	30	3 _{35/64}	6 _{1/2}	1 _{31/32}	4 _{3/4}	2 _{1/32}	1 _{3/16}	23 ₃₂	5 _{1/8}	1.5000	0.6260	14	1/2	UC 206-18		
206		30	90	165	50	121	17	21	18	130	38.1	15.9			206	PH 206	1.6
206-19	1 _{3/16}														206-19		
206-20	1 _{1/4}														206-20		
UCPH 207-20	1 _{1/4}														UC 207-20		
207-21	1 _{5/16}		3 _{47/64}	6 _{9/16}	2 _{3/8}	5	2 _{1/32}	1 _{3/16}	3/4	5 _{1/2}	1.6890	0.6890	14	1/2	207-21	PH 207	2.0
207-22	1 _{3/8}	35	95	167	60	127	17	21	19	140	42.9	17.5			207-22		
207		35													207		
207-23	1 _{7/16}														207-23		
UCPH 208-24	1 _{1/2}		3 _{15/16}	7 _{1/4}	2 _{3/4}	5 _{13/32}	2 _{1/32}	1	3/4	5 _{29/32}	1.9370	0.7480	14	1/2	UC 208-24		
208-25	1 _{9/16}	40	100	184	70	137	17	25	19	150	49.2	19.0			208-25	PH 208	2.7
208		40													208		
UCPH 209-26	1 _{5/8}														UC 209-26		
209-27	1 _{11/16}		4 _{9/64}	7 _{15/32}	2 _{3/4}	5 _{3/4}	2 _{1/32}	1	25/32	6 _{7/32}	1.9370	0.7480	14	1/2	209-27	PH 209	3.0
209-28	1 _{3/4}	45	105	190	70	146	17	25	20	158	49.2	19.0			209-28		
209		45													209		
UCPH 210-30	1 _{7/8}														UC 210-30		
210-31	1 _{15/16}	50	4 _{21/64}	8 _{1/8}	2 _{3/4}	6 _{1/4}	25/32	1	7/8	6 _{1/2}	2.0315	0.7480	16	5/8	210-31	PH 210	3.5
210		50	110	206	70	159	20	25	22	165	51.6	19.0			210		
210-32	2														210-32		

폭축형 필로우형 볼베어링 유니트

UCPA2

(원통구멍형, 경(輕)하중용)


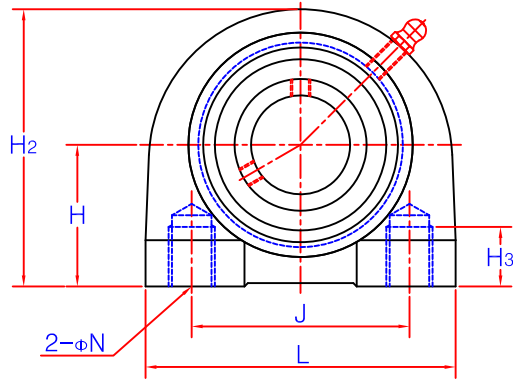
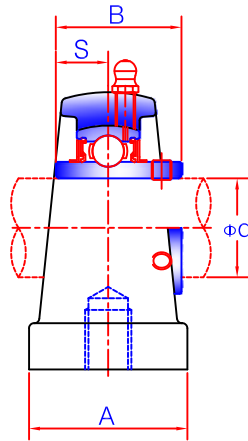


유니트 호칭번호	축지름 d		주요치수 (in./mm)									설치볼트 호칭 호칭번호	베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	H ₂	H ₃	B	S	(mm)			
UCPA 201-8	1/2	12											UC 201-8		0.64
202		15	1 ³ / ₁₆	3	1 ¹ / ₂	2 ³ / ₆₄		2 ⁷ / ₁₆	1 ¹ / ₂	1.2205	0.5000	10	202	PA 204	0.62
202-10	5/8	17	30.2	76	38	52	10	62	13	31.0	12.7		202-10		0.61
203													203		0.59
204-12	3/4	20											204-12		0.59
204													204		
UCPA 205-14	7/8	25	1 ⁷ / ₁₆	3 ⁵ / ₃₂	1 ¹ / ₂	2 ¹³ / ₆₄	10	2 ²⁷ / ₃₂	1 ⁹ / ₃₂	1.3425	0.5630	10	205-14	PA 205	0.83
205-15	15/16		36.5	80	38	56		72	15	34.1	14.3		205-15		
205													205		
205-16	1												205-16		
UCPA 206-18	1 ¹ / ₈	30	1 ¹¹ / ₁₆	3 ¹¹ / ₁₆	1 ⁷ / ₈	2 ¹⁹ / ₃₂	14	3 ⁵ / ₁₆	2 ³ / ₃₂	1.5000	0.6260	14	206-18	PA 206	1.2
206			42.9	94	48	66		84	18	38.1	15.9		206		
206-19	1 ³ / ₁₆												206-19		
206-20	1 ¹ / ₄												206-20		
UCPA 207-20	1 ¹ / ₄	35	1 ⁷ / ₈	4 ¹¹ / ₃₂	1 ⁷ / ₈	3 ⁵ / ₃₂	14	3 ³ / ₄	2 ⁵ / ₃₂	1.6890	0.6890	14	207-20	PA 207	1.7
207-21	1 ⁵ / ₁₆		47.6	110	48	80		95	20	42.9	17.5		207-21		
207-22	1 ³ / ₈												207-22		
207													207		
207-23	1 ⁷ / ₁₆												207-23		
UCPA 208-24	1 ¹ / ₂	40	1 ¹⁵ / ₁₆	4 ⁹ / ₁₆	2 ¹ / ₈	3 ⁵ / ₁₆	14	3 ¹⁵ / ₁₆	2 ⁵ / ₃₂	1.9370	0.7480	14	208-24	PA 208	2.0
208-25	1 ⁹ / ₁₆		49.2	116	54	84		100	20	49.2	19.0		208-25		
208													208		
UCPA 209-26	1 ⁵ / ₈	45	2 ⁹ / ₆₄	4 ²³ / ₃₂	2 ¹ / ₈	3 ³⁵ / ₆₄	14	4 ¹ / ₄	1	1.9370	0.7480	14	209-26	PA 209	2.2
209-27	1 ¹¹ / ₁₆		54.2	120	54	90		108	25	49.2	19.0		209-27		
209-28	1 ³ / ₄												209-28		
209													209		
UCPA 210-30	1 ⁷ / ₈	50	2 ¹ / ₄	5 ¹ / ₈	2 ³ / ₈	3 ⁴⁵ / ₆₄	16	4 ⁹ / ₁₆	1	2.0315	0.7480	16	210-30	PA 210	2.8
210-31	1 ¹⁵ / ₁₆		57.2	130	60	94		116	25	51.6	19.0		210-31		
210													210		
210-32	2												210-32		

각도조정용 플랜지형 볼베어링 유니트

UCFA2

(원통구멍형, 경(輕)하중용)

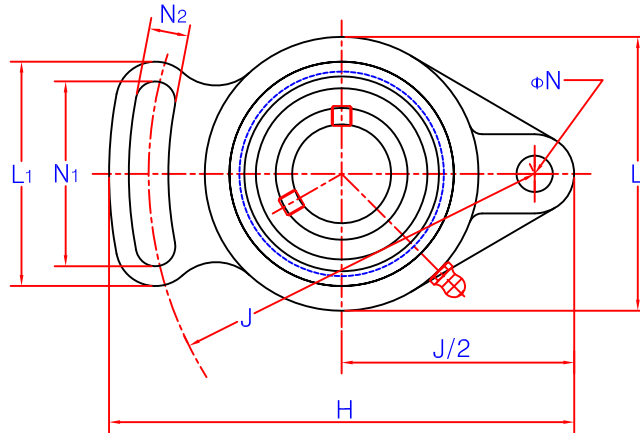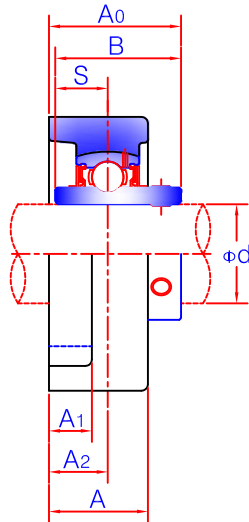


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)											설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																	
	(in.)	(mm)	H	L	A	J	N	N ₁	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCFA 201		12														UC 201		0.47
201-8	1/2	15														201-8		
202			3 _{27/32}	2 _{3/8}	1	3 _{5/64}	2 _{5/64}	1 _{9/16}	1 _{5/32}	1 _{9/32}	1 _{1/4}	1.2205	0.5000	10	3/8	202	FA 204	0.45
202-10	5/8	17	98	60	25.4	78	10	40	12	15	32.1	31.0	12.7			202-10		0.44
203																203		
204-12	3/4	20														204-12		0.42
204																204		
UCFA 205-14	7/8															UC 205-14		
205-15	15/16		4 _{7/8}	2 _{3/4}	1 _{1/16}	3 _{25/32}	1 ₂	1 _{15/16}	1 ₂	5/8	1 _{13/32}	1.3425	0.5630	10	3/8	205-15	FA 205	0.68
205		25	124	70	27	96	13	49	13	16	35.7	34.1	14.3			205		
205-16	1															205-16		
UCFA 206-18	1 1/8															UC 206-18		
206		30	5 _{21/32}	3 _{1/8}	1 _{7/32}	4 _{39/64}	3 _{5/64}	2 _{3/16}	3 _{5/64}	4 _{5/64}	1 _{9/15}	1.5000	0.6260	10	3/8	206	FA 206	1.0
206-19	1 3/16		144	79	31	117	13	56	14	18	40.0	38.1	15.9			206-19		
206-20	1 1/4															206-20		
UCFA 207-20	1 1/4															UC 207-20		
207-21	1 5/16		6 _{5/16}	3 _{15/32}	1 _{11/32}	5 _{1/8}	1 _{9/32}	2 _{9/16}	5/8	3/4	1 _{23/32}	1.6890	0.6890	12	7/16	207-21	FA 207	1.5
207-22	1 3/8		160	88	34	130	15	65	16	19	44.0	42.9	17.5			207-22		
207		35														207		
207-23	1 7/16															207-23		
UCFA 208-24	1 1/2		6 _{27/32}	3 _{29/32}	1 _{13/32}	5 _{19/32}	1 _{9/32}	2 _{23/32}	5/8	1 _{3/16}	2	1.9370	0.7480	12	7/16	UC 208-24		
208-25	1 9/16		174	99	36	142	15	69	16	21	51.0	49.2	19.0			208-25	FA 208	1.9
208		40														208		
UCFA 209-26	1 5/8															UC 209-26		
209-27	1 11/16		7 _{3/32}	4 _{3/8}	1 1/2	5 _{53/64}	2 _{1/32}	2 _{3/4}	4 _{5/64}	7/8	2 _{1/16}	1.9370	0.7480	14	1/2	209-27	FA 209	1.7
209-28	1 3/4		180	111	38	148	17	70	18	22	52.0	49.2	19.0			209-28		
209		45														209		
UCFA 210-30	1 7/8															UC 210-30		
210-31	1 15/16		7 _{15/32}	4 _{9/16}	1 _{9/16}	6 _{3/16}	2 _{1/32}	2 _{29/32}	4 _{5/64}	7/8	2 _{5/32}	2.0315	0.7480	14	1/2	210-31	FA 210	2.0
210		50	190	116	40	157	17	74	18	22	55.1	51.6	19.0			210		
210-32	2															210-32		
UCFA 211-32	2															UC 211-32		
211-34	2 1/8		8 _{19/32}	5 _{1/4}	1 _{11/16}	7 _{1/4}	2 _{1/32}	3 _{5/16}	2 _{5/32}	1	2 _{5/16}	2.1890	0.8740	15	9/16	211-34	FA 211	3.6
211		55	218	133	43	184	17	84	20	25	59.1	55.6	22.2			211		
211-35	2 3/16															211-35		

편측채결 플랜지형 볼베어링 유니트

UCFB2

(원통구멍형, 경(輕)하중용)



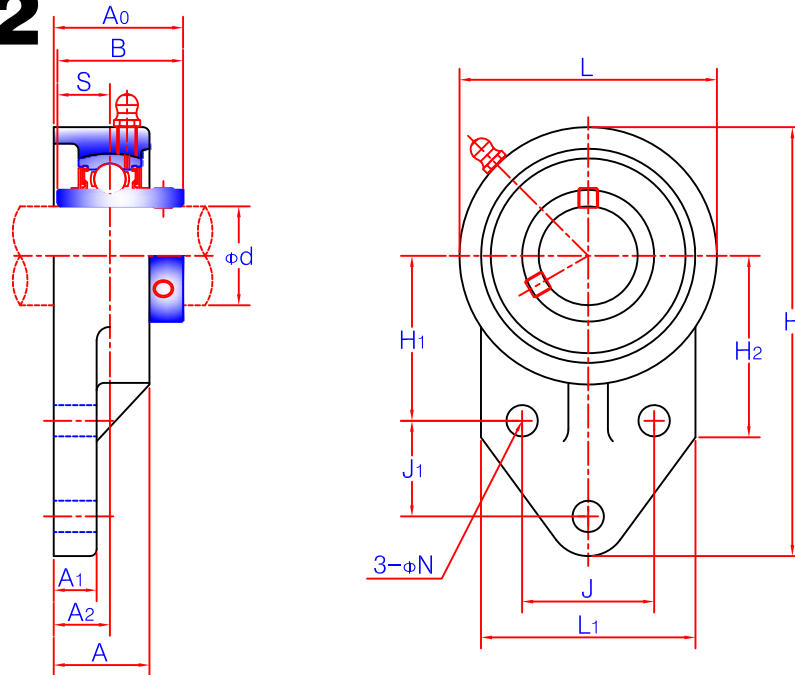


유 니 트 호칭번호	축 지 림		주 요 치 수 (in.) (mm)														설 치 볼 트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d																				
	(in.)	(mm)	H	L	A	J	J ₁	N	H ₁	H ₂	L ₁	A ₁	A ₂	A ₀	B	S	(mm)	(in.)			
UCFB 201-8 202 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20	411/32 110	27/16 62	15/16 24	117/64 32	11/16 27	3/8 9.5	121/32 42	21/16 52	21/16 52	1/2 13	17/32 13.5	11/4 31.8	1.2205 31.0	0.5000 12.7	8	5/16	UC 201-8 202 202-10 203 204-12 204	FB 204	0.64 0.62 0.61 0.59
UCFB 205-14 205-15 205 205-16	7/8 15/16 1	25	49/16 116	211/16 68	11/32 26	111/32 34	11/16 27	3/8 9.5	149/64 45	21/16 52	27/32 56	1/2 13	19/32 15	13/8 34.7	1.3425 34.1	0.5630 14.3	8	5/16	UC 205-14 205-15 205 205-16	FB 205	0.68
UCFB 206-18 206 206-19 206-20	11/8 13/16 11/4	30	51/8 130	31/16 78	15/32 29	137/64 40	19/64 29	3/8 9.5	131/32 50	25/32 55	29/16 65	1/2 13	43/64 17	117/32 39.2	1.5000 38.1	0.6260 15.9	8	5/16	UC 206-18 206 206-19 206-20	FB 206	0.92
UCFB 207-20 207-21 207-22 207 207-23	11/4 15/16 13/8 17/16	35	521/32 144	317/32 90	15/16 33	113/16 46	117/64 32	3/8 9.5	211/64 55	27/16 62	23/4 70	19/32 15	3/4 19	13/4 44.4	1.6890 42.9	0.6890 17.5	8	5/16	UC 207-20 207-21 207-22 207 207-23	FB 207	1.3
UCFB 208-24 208-25 208	11/2 9/16	40	615/32 164	315/16 100	111/32 34	131/32 50	139/64 41	7/16 11.1	223/64 60	227/32 72	31/16 78	5/8 16	25/32 20	131/32 50.2	1.9370 49.2	0.7480 19.0	10	3/8	UC 208-24 208-25 208	FB 208	1.8
UCFB 209-26 209-27 209-28 209	15/8 111/16 13/4	45	627/32 174	43/16 106	111/32 34	21/8 54	111/16 43	7/16 11.1	29/16 65	3 76	35/32 80	23/32 18	25/32 20	131/32 50.2	1.9370 49.2	0.7480 19.0	10	3/8	UC 209-26 209-27 209-28 209	FB 209	2.0
UCFB 210-30 210-31 210 210-32	17/8 115/16 2	50	71/4 184	413/32 112	13/8 35	29/32 58	113/16 46	7/16 11.1	243/64 68	37/32 82	33/8 86	23/32 18	25/32 20	21/16 52.6	2.0315 51.6	0.7480 19.0	10	3/8	UC 210-30 210-31 210 210-32	FB 210	2.3

행거형 볼베어링 유니트

UCHA2

(원통구멍형, 경(輕)하중용)

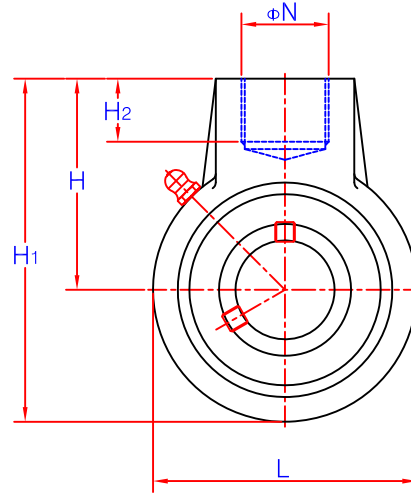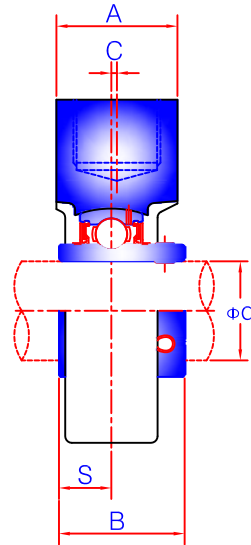

SL방식






L3방식

유니트 호칭번호	축지름		주요치수 (in./mm)									베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	A	L	H ₁	H ₂	N	C	B	S			
UCHA 201		12										UC 201		0.77
201-8	1/2	15										201-8		0.75
202	5/8	17	2 _{33/64}	1 _{9/16}	2 _{17/32}	3 _{25/32}	3/4	PF 3/4	0	1.2205	0.5000	202-10	HA 204	0.74
203	3/4	20	64	40	64	96	19.1			31.0	12.7	203		0.72
204-12												204-12		
204												204		
UCHA 205-14	7/8											UC 205-14		
205-15	15/16	25	2 _{33/64}	1 _{9/16}	3 _{1/16}	4 _{1/16}	3/4	PF 3/4	0	1.3425	0.5630	205-15	HA 205	0.87
205			64	40	78	103	19.1			34.1	14.3	205		
205-16	1											205-16		
UCHA 206-18	1 1/8											UC 206-18		
206		30	2 _{33/64}	1 _{9/16}	3 _{5/32}	4 _{3/32}	3/4	PF 3/4	0	1.5000	0.6260	206	HA 206	0.83
206-19	1 3/16		64	40	80	104	19.1			38.1	15.9	206-19		
206-20	1 1/4											206-20		
UCHA 207-20	1 1/4											UC 207-20		
207-21	1 5/16											207-21		
207-22	1 3/8	35	2 _{3/4}	1 _{9/16}	3 _{5/8}	4 _{9/16}	3/4	PF 3/4	0	1.6890	0.6890	207-22	HA 207	1.2
207			70	40	92	116	19.1			42.9	17.5	207		
207-23	1 7/16											207-23		
UCHA 208-24	1 1/2											UC 208-24		
208-25	1 9/16	40	2 _{7/8}	1 _{9/16}	3 _{15/16}	4 _{27/32}	3/4	PF 3/4	5/64	1.9370	0.7480	208-25	HA 208	1.3
208			73	40	100	123	19.1		2	49.2	19.0	208		
UCHA 209-26	1 5/8											UC 209-26		
209-27	1 11/16											209-27		
209-28	1 3/4	45	3 _{15/64}	1 _{7/8}	4 _{1/4}	5 _{11/32}	13/16	PF 1	13/64	1.9370	0.7480	209-28	HA 209	1.7
209			82	48	108	136	21		5	49.2	19.0	209		
UCHA 210-30	1 7/8											UC 210-30		
210-31	1 15/16											210-31		
210		50	3 _{17/64}	1 _{7/8}	4 _{21/32}	5 _{19/32}	13/16	PF 1	13/64	2.0315	0.7480	210	HA 210	2.1
210-32	2		83	48	118	142	21		5	51.6	19.0	210-32		
UCHA 211-32	2											UC 211-32		
211-34	2 1/8	55	3 _{3/4}	2 _{3/8}	4 _{31/32}	5 _{29/32}	1	PF 1 1/4	9/32	2.1890	0.8740	211-34	HA 211	2.8
211			95	60	126	150	25		7	55.6	22.2	211		
211-35	2 3/16											211-35		
UCHA 212-36	2 1/4											UC 212-36		
212		60	4 _{1/64}	2 _{3/8}	5 _{19/32}	6 _{13/16}	1 3/32	PF 1 1/4	23/64	2.5630	1.0000	212	HA 212	3.9
212-38	2 3/8		102	60	142	173	28		9	65.1	25.4	212-38		
212-39	2 7/16											212-39		
UCHA 213-40	2 1/2											UC 213-40		
213		65	4 _{39/64}	2 _{3/4}	6 _{17/32}	7 _{7/8}	1 1/4	PF 1 1/2	3/8	2.5630	1.0000	213	HA 213	5.8
			117	70	166	200	32		9.5	65.1	25.4			
UCHA 214-44	2 3/4											UC 214-44		
214		70	4 _{39/64}	2 _{3/4}	6 _{17/32}	7 _{7/8}	1 1/4	PF 1 1/2	3/8	2.9371	1.1890	214	HA 214	5.9
			117	70	166	200	32		9.5	74.6	30.2			
UCHA 215-47	2 15/16											UC 215-47		
215		75	4 _{39/64}	2 _{3/4}	6 _{17/32}	7 _{7/8}	1 1/4	PF 1 1/2	3/8	3.0630	1.3110	215	HA 215	5.6
215-48	3		117	70	166	200	32		9.5	77.8	33.3	215-48		

필로우형 볼베어링 유니트

UKP2

(테이퍼구멍형, 경(輕)하중용)

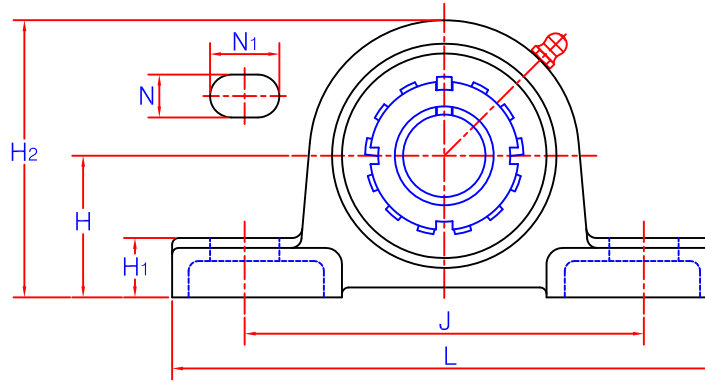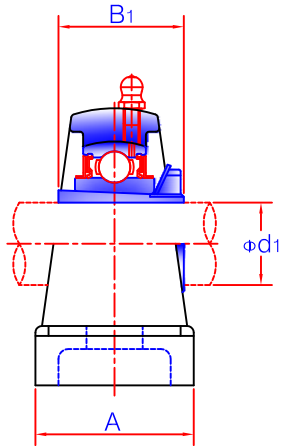


유니트 호칭번호	축지름 d1		주요치수 (in./mm)									설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	N1	H1	H2	B1	(mm)	(in.)				
UKP 205 205	3/4	20	17/16 36.5	5 1/2 140	1 1/2 38	4 1/8 105	1/2 13	3/4 19	19/32 15	25/32 71	1 3/8 35	10	3/8	UK 205	P 205	HE2305 H 2305	0.84
UKP 206 206 206 206	7/8 15/16 1	25	1 11/16 42.9	6 1/2 165	1 7/8 48	4 3/4 121	21/32 17	13/16 21	21/32 17	39/32 83	1 1/2 38	14	1/2	UK 206	P 206	HS2306 HA2306 H 2306 HE2306	1.4
UKP 207 207 207	1 1/8 13/16	30	1 7/8 47.6	6 9/16 167	1 7/8 48	5 127	21/32 17	13/16 21	45/64 18	3 21/32 93	1 11/16 43	14	1/2	UK 207	P 207	HS2307 H 2307 HA2307	1.7
UKP 208 208 208	1 1/4 1 3/8	35	1 15/16 49.2	7 1/4 184	2 1/8 54	5 13/32 137	21/32 17	13/16 21	45/64 18	3 27/32 98	1 13/16 46	14	1/2	UK 208	P 208	HE2308 HS2308 H 2308	2.0
UKP 209 209 209 209	1 7/16 1 1/2 1 5/8	40	2 15/16 54.0	7 15/32 190	2 1/8 54	5 3/4 146	21/32 17	13/16 21	25/32 20	4 3/16 106	1 31/32 50	14	1/2	UK 209	P 209	HE2309 H 2309 HS2309	2.3
UKP 210 210 210	1 11/16 1 3/4	45	2 1/4 57.2	8 1/8 206	2 3/8 60	6 1/4 159	25/32 20	1 25	13/16 21	4 1/2 114	2 5/32 55	16	5/8	UK 210	P 210	HA2310 HE2310 H 2310	3.0
UKP 211 211 211 211	1 7/8 1 15/16 2	50	2 1/2 63.5	8 5/8 219	2 3/8 60	6 23/32 171	25/32 20	1 25	29/32 23	4 31/32 126	2 5/16 59	16	5/8	UK 211	P 211	HS2311 HA2311 H 2311 HE2311	3.7
UKP 212 212	2 1/8	55	2 3/4 69.8	9 1/2 241	2 3/4 70	7 1/4 184	25/32 20	1 25	1 25	5 7/16 138	2 7/16 62	16	5/8	UK 212	P 212	HS2312 H 2312	4.8
UKP 213 213 213 213	2 3/16 2 1/4 2 3/8	60	3 76.2	10 25/64 264	2 3/4 70	8 203	1 25	1 3/16 30	1 1/16 27	5 15/16 151	2 9/16 65	20	3/4	UK 213	P 213	HA2313 HE2313 H 2313 HS2313	5.8
UKP 215 215 215	2 7/16 2 1/2	65	3 1/4 82.6	10 13/16 275	2 29/32 74	8 17/32 217	1 25	1 3/16 30	1 3/32 28	6 13/32 163	2 7/8 73	20	3/4	UK 215	P 215	HA2315 HE2315 H 2315	7.7
UKP 216 216 216	2 11/16 2 3/4	70	3 1/2 88.9	11 1/2 292	3 1/16 78	9 1/8 232	1 25	1 3/16 30	1 3/16 30	6 7/8 175	3 1/16 78	20	3/4	UK 216	P 216	HA2316 HE2316 H 2316	9.2
UKP 217 217 217	2 15/16 3	75	3 3/4 95.2	12 7/32 310	3 9/32 83	9 23/32 247	1 25	1 3/16 30	1 1/4 32	7 23/64 187	3 7/32 82	20	3/4	UK 217	P 217	HA2317 H 2317 HE2317	11.0
UKP 218		80	4 101.6	12 7/8 327	3 15/32 88	10 5/6 262	1 1/16 27	1 13/32 36	1 5/16 33	7 7/8 200	3 3/8 86	22	7/8	UK 218	P 218	H 2318	13.8

필로우형 볼베어링 유니트

UKPX

(테이퍼구멍형, 중(中)하중용)


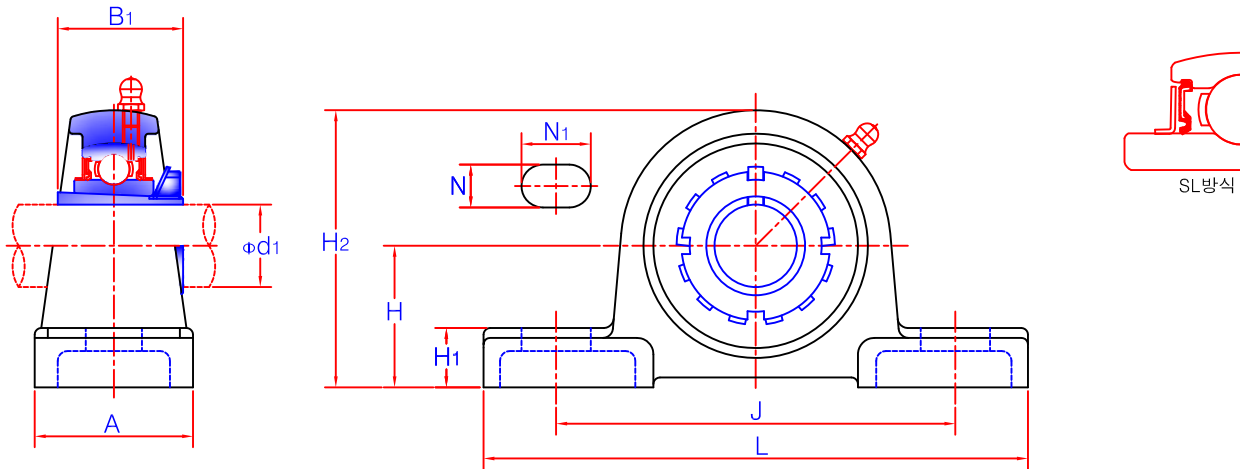


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)										설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1																	
	(in.)	(mm)	H	L	A	J	N	N ₁	H ₁	H ₂	B ₁	(mm)	(in.)					
UKP X05 X05	3/4	20	13/4 44.4	61/4 159	2 51	411/16 119	21/32 17	1 25	45/64 18	311/32 85	13/8 35	14	1/2	UK X05	P X05	HE2305 H 2305	1.5	
UKP X06 X06 X06 X06	7/8 15/16 1	25	17/8 47.6	67/8 175	21/4 57	5 127	21/32 17	1 25	25/32 20	345/64 94	11/2 38	14	1/2	UK X06	P X06	HS2306 HA2306 H 2306 HE2306	2.1	
UKP X07 X07 X07	11/8 13/16	30	21/8 54.0	8 203	21/4 57	521/32 144	21/32 17	13/16 30	7/8 22	41/8 105	111/16 43	14	1/2	UK X07	P X07	HS2307 H 2307 HA2307	2.7	
UKP X08 X08 X08	11/4 13/8	35	25/16 58.7	83/4 222	25/8 67	65/32 156	25/32 20	11/4 32	11/32 26	47/16 113	113/16 46	16	5/8	UK X08	P X08	HE2308 HS2308 H 2308	3.5	
UKP X09 X09 X09 X09	17/16 11/2 15/8	40	25/16 58.7	83/4 222	25/8 67	65/32 156	25/32 20	15/16 33	11/32 26	49/16 116	131/32 50	16	5/8	UK X09	P X09	HA2309 HE2309 H 2309 HS2309	3.7	
UKP X10 X10 X10	111/16 13/4	45	21/2 63.5	91/2 241	27/8 73	623/32 171	25/32 20	129/64 37	11/16 27	431/32 126	25/32 55	16	5/8	UK X10	P X10	HA2310 HE2310 H 2310	4.6	
UKP X11 X11 X11 X11	17/8 115/16 2	50	23/4 69.8	101/4 260	31/8 79	71/4 184	1 25	129/64 37	13/16 30	515/32 139	25/16 59	20	3/4	UK X11	P X11	HS2311 HA2311 H 2311 HE2311	6.2	
UKP X12 X12	21/8	55	3 76.2	111/4 286	39/32 83	8 203	1 25	15/8 41	11/4 32	515/16 151	27/16 62	20	3/4	UK X12	P X12	HS2312 H 2312	7.5	
UKP X13 X13 X13 X13	23/16 21/4 23/8	60	3 76.2	111/4 286	39/32 83	8 203	1 25	15/8 41	11/4 32	615/16 151	29/16 65	20	3/4	UK X13	P X13	HA2313 HE2313 H 2313 HS2313	7.8	
UKP X15 X15 X15	21/2 25/8	65	31/2 88.9	13 330	31/2 89	91/8 232	11/16 27	2 51	13/8 35	627/32 174	27/8 73	22	7/8	UK X15	P X15	HE2315 H 2315 HS2315	10.5	
UKP X16 X16	23/4	70	4 101.6	15 381	41/32 102	115/32 283	11/16 27	25/16 59	121/32 42	73/4 197	31/16 78	22	7/8	UK X16	P X16	HE2316 H 2316	15.4	
UKP X17 X17 X17 X17	27/8 215/16 3	75	4 101.6	15 381	41/32 102	115/32 283	11/16 27	25/16 59	121/32 42	761/64 202	37/32 82	22	7/8	UK X17	P X17	HS2317 HA2317 H 2317 HE2317	15.8	
UKP X18		80	4 101.6	15 381	43/8 111	115/32 283	11/16 27	23/8 60	125/32 45	81/8 206	33/8 86	22	7/8	UK X18	P X18	H 2318	18.6	
UKP X20 X20	31/2	90	5 127.0	17 432	43/4 121	139/32 337	15/16 33	217/32 64	21/16 52	927/32 250	313/16 97	27	1	UK X20	P X20	HE2320 H 2320	29.3	

필로우형 볼베어링 유니트

UKP3

(테이퍼구멍형, 중(重)하중용)



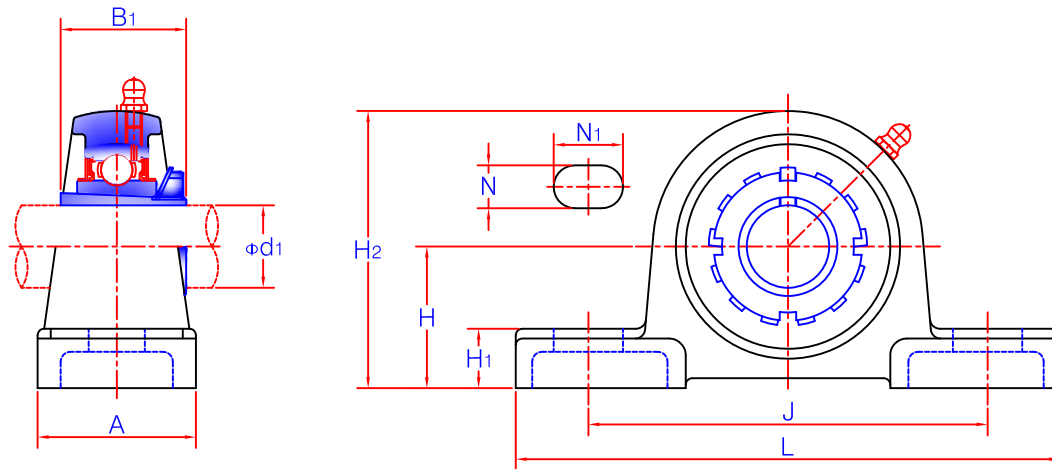


유 니 트 호칭번호	축 지 림		주 요 치 수 (in.) (mm)										설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1		H	L	A	J	N	N ₁	H ₁	H ₂	B ₁							
	(in.)	(mm)										(mm)	(in.)					
UKP 305 305	3/4	20	1 ⁴⁹ / ₆₄ 45	6 ⁷ / ₈ 175	1 ³ / ₄ 45	5 ³ / ₁₆ 132	2 ¹ / ₃₂ 17	2 ⁵ / ₃₂ 20	1 ⁹ / ₃₂ 15	3 ¹¹ / ₃₂ 85	1 ³ / ₈ 35	14	1/2	UK 305	P 305	HE2305 H 2305	1.7	
UKP 306 306 306 306	7/8 15/16 1	25	1 ³¹ / ₃₂ 50	7 ³ / ₃₂ 180	1 ³¹ / ₃₂ 50	5 ¹ / ₂ 140	2 ¹ / ₃₂ 17	2 ⁵ / ₃₂ 20	4 ⁵ / ₆₄ 18	3 ³ / ₄ 95	1 ¹ / ₂ 38	14	1/2	UK 306	P 306	HS2306 HA2306 H 2306 HE2306	2.3	
UKP 307 307 307	1/8 13/16	30	2 ¹³ / ₆₄ 56	8 ⁹ / ₃₂ 210	2 ⁷ / ₃₂ 56	6 ⁵ / ₁₆ 160	2 ¹ / ₃₂ 17	1 25	2 ⁵ / ₃₂ 20	4 ¹¹ / ₆₄ 106	1 ¹¹ / ₁₆ 43	14	1/2	UK 307	P 307	HS2307 H 2307 HA2307	3.0	
UKP 308 308 308	1 ¹ / ₄ 13/8	35	2 ²³ / ₆₄ 60	8 ²¹ / ₃₂ 220	2 ³ / ₈ 60	6 ¹¹ / ₁₆ 170	2 ¹ / ₃₂ 17	1 ¹ / ₁₆ 27	7/8 22	4 ⁹ / ₁₆ 116	1 ¹³ / ₁₆ 46	14	1/2	UK 308	P 308	HE2308 HS2308 H 2308	3.8	
UKP 309 309 309 309	1 ⁷ / ₁₆ 1/2 15/8	40	2 ⁴¹ / ₆₄ 67	9 ²¹ / ₃₂ 245	2 ⁵ / ₈ 67	7 ¹⁵ / ₃₂ 190	2 ⁵ / ₃₂ 20	1 ³ / ₁₆ 30	1 ⁵ / ₁₆ 24	5 ⁵ / ₆₄ 129	1 ³¹ / ₃₂ 50	16	5/8	UK 309	P 309	HA2309 HE2309 H 2309 HS2309	5.0	
UKP 310 310 310	1 ¹¹ / ₁₆ 13/4	45	2 ⁶¹ / ₆₄ 75	10 ¹³ / ₁₆ 275	2 ¹⁵ / ₁₆ 75	8 ¹¹ / ₃₂ 212	2 ⁵ / ₃₂ 20	1 ³ / ₈ 35	1 ¹ / ₁₆ 27	5 ⁵ / ₈ 143	2 ⁵ / ₃₂ 55	16	5/8	UK 310	P 310	HA2310 HE2310 H 2310	6.7	
UKP 311 311 311 311	1 ⁷ / ₈ 15/16 2	50	3 ⁵ / ₃₂ 80	12 ⁷ / ₃₂ 310	3 ⁵ / ₃₂ 80	9 ⁹ / ₃₂ 236	2 ⁵ / ₃₂ 20	1 ¹ / ₂ 38	1 ³ / ₁₆ 30	6 ¹ / ₁₆ 154	2 ⁵ / ₁₆ 59	16	5/8	UK 311	P 311	HS2311 HA2311 H 2311 HE2311	8.1	
UKP 312 312	2 ¹ / ₈	55	3 ¹¹ / ₃₂ 85	13 330	3 ¹¹ / ₃₂ 85	9 ²⁷ / ₃₂ 250	1 25	1 ¹ / ₂ 38	1 ¹ / ₄ 32	6 ¹ / ₂ 165	2 ⁷ / ₁₆ 62	20	3/4	UK 312	P 312	HS2312 H 2312	9.4	
UKP 313 313 313 313	2 ³ / ₁₆ 2 ¹ / ₄ 23/8	60	3 ³⁵ / ₆₄ 90	13 ³ / ₈ 340	3 ¹⁷ / ₃₂ 90	10 ¹ / ₄ 260	1 25	1 ¹ / ₂ 38	1 ⁵ / ₁₆ 33	6 ¹⁵ / ₁₆ 176	2 ⁹ / ₁₆ 65	20	3/4	UK 313	P 313	HA2313 HE2313 H 2313 HS2313	10.8	
UKP 315 315	2 ¹ / ₂	65	3 ¹⁵ / ₁₆ 100	14 ³¹ / ₃₂ 380	3 ¹⁵ / ₁₆ 100	11 ¹³ / ₃₂ 290	1 ¹ / ₁₆ 27	1 ⁹ / ₁₆ 40	1 ³ / ₈ 35	7 ²⁵ / ₃₂ 198	2 ⁷ / ₈ 73	22	7/8	UK 315	P 315	HE2315 H 2315	14.9	
UKP 316 316	23/4	70	4 ¹¹ / ₆₄ 106	15 ³ / ₄ 400	4 ¹¹ / ₃₂ 110	11 ¹³ / ₁₆ 300	1 ¹ / ₁₆ 27	1 ⁹ / ₁₆ 40	1 ⁹ / ₁₆ 40	8 ⁹ / ₃₂ 210	3 ¹ / ₁₆ 78	22	7/8	UK 316	P 316	HE2316 H 2316	18.6	
UKP 317 317	3	75	4 ¹³ / ₃₂ 112	16 ¹⁷ / ₃₂ 420	4 ¹¹ / ₃₂ 110	12 ¹⁹ / ₃₂ 320	1 ⁵ / ₁₆ 33	1 ²⁵ / ₃₂ 45	1 ⁹ / ₁₆ 40	8 ²¹ / ₃₂ 220	3 ⁷ / ₃₂ 82	27	1	UK 317	P 317	H 2317 HE2317	20.2	
UKP 318		80	4 ⁴¹ / ₆₄ 118	16 ¹⁵ / ₁₆ 430	4 ¹¹ / ₃₂ 110	13 330	1 ⁵ / ₁₆ 33	1 ²⁵ / ₃₂ 45	1 ²⁵ / ₃₂ 45	9 ¹ / ₄ 235	3 ³ / ₈ 86	27	1	UK 318	P 318	H 2318	22.8	
UKP 319 319	31/4	85	4 ⁵⁹ / ₆₄ 125	18 ¹ / ₂ 470	4 ²³ / ₃₂ 120	14 ³ / ₁₆ 360	1 ¹³ / ₃₂ 36	1 ³¹ / ₃₂ 50	1 ²⁵ / ₃₂ 45	9 ²⁷ / ₃₂ 250	3 ¹⁷ / ₃₂ 90	30	11/8	UK 319	P 319	HE2319 H 2319	29.3	
UKP 320 320	31/2	90	5 ³³ / ₆₄ 140	19 ⁹ / ₃₂ 490	4 ²³ / ₃₂ 120	14 ³¹ / ₃₂ 380	1 ¹³ / ₃₂ 36	1 ³¹ / ₃₂ 50	2 ³¹ / ₃₂ 50	10 ¹³ / ₁₆ 275	3 ¹³ / ₁₆ 97	30	11/8	UK 320	P 320	HE2320 H 2320	34.8	
UKP 322 322	4	100	5 ²⁹ / ₃₂ 150	20 ¹⁵ / ₃₂ 520	5 ¹ / ₂ 140	15 ³ / ₄ 400	1 ⁹ / ₁₆ 40	2 ⁵ / ₃₂ 55	2 ⁵ / ₃₂ 55	11 ¹³ / ₁₆ 300	4 ¹ / ₈ 105	33	11/4	UK 322	P 322	H 2322 HE2322	43.9	
UKP 324 324	47/16	110	5 ³³ / ₆₄ 160	22 ⁷ / ₁₆ 570	5 ¹ / ₂ 140	17 ²³ / ₃₂ 450	1 ⁹ / ₁₆ 40	2 ⁵ / ₃₂ 55	2 ⁹ / ₁₆ 65	12 ¹⁹ / ₃₂ 320	4 ¹³ / ₃₂ 112	33	11/4	UK 324	P 324	H 2324 HA2324	55.7	
UKP 326 326	41/2	115	7 ³ / ₃₂ 180	23 ⁵ / ₈ 600	5 ¹ / ₂ 140	18 ²⁹ / ₃₂ 480	1 ⁹ / ₁₆ 40	2 ⁵ / ₃₂ 55	2 ⁶¹ / ₆₄ 75	13 ³¹ / ₃₂ 355	4 ³ / ₄ 121	33	11/4	UK 326	P 326	HE2326 H 2326	71.9	
UKP 328 328	415/16	125	7 ⁷ / ₈ 200	24 ¹³ / ₃₂ 620	5 ¹ / ₂ 140	9 ¹¹ / ₁₆ 500	1 ⁹ / ₁₆ 40	2 ⁵ / ₃₂ 55	2 ⁶¹ / ₆₄ 75	15 ¹¹ / ₃₂ 390	5 ⁵ / ₃₂ 131	33	11/4	UK 328	P 328	H 2328 HA2328	92.5	

각플랜지형 볼베어링 유니트

UKF2

(테이퍼구멍형, 경(輕)하중용)


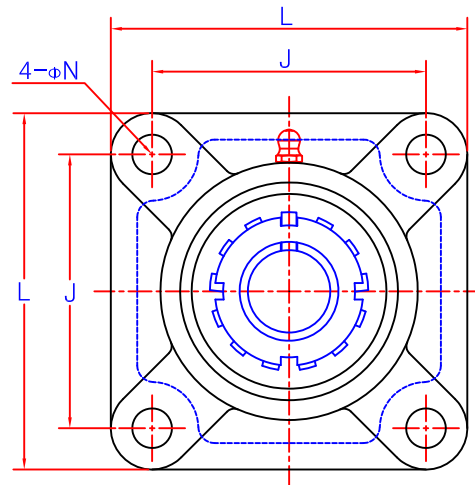
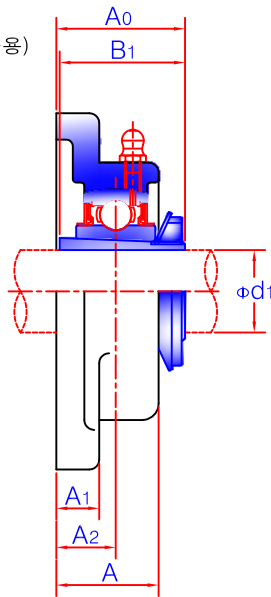


유니트 호칭번호	축지름 d ₁		주요치수 (in./mm)								설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	(in.)	(mm)	L	A	J	N	A ₁	A ₂	A ₀	B ₁	(mm)	(in.)				
UKF 205 205	3/4	20	3 3/4 95	1 1/16 27	2 3/4 70	15/32 12	35/64 14	5/8 16	1 3/8 34.7	1 3/8 35	10	3/8	UK 205	F 205	HE2305 H 2305	0.87
UKF 206 206 206	7/8 15/16 1	25	4 1/4 108	1 7/32 31	3 17/64 83	15/32 12	9/16 14.3	45/64 18	1 1/2 37.7	1 1/2 38	10	3/8	UK 206	F 206	HS2306 HA2306 H 2306 HE2306	1.3
UKF 207 207 207	1 1/8 1 3/16	30	4 19/32 117	1 11/32 34	3 5/8 92	35/64 14	39/64 15.5	3/4 19	1 5/8 41.2	1 11/16 43	12	7/16	UK 207	F 207	HS2307 H 2307 HA2307	1.6
UKF 208 208 208	1 1/4 1 3/8	35	5 1/8 130	1 13/32 36	4 1/64 102	5/8 16	39/64 15.5	53/64 21	1 3/4 44.7	1 13/16 46	14	1/2	UK 208	F 208	HE2308 HS2308 H 2308	1.9
UKF 209 209 209 209	1 7/16 1 1/2 1 5/8	40	5 13/32 137	1 1/2 38	4 9/64 105	5/8 16	11/16 17.5	55/64 22	1 27/32 47.2	1 31/32 50	14	1/2	UK 209	F 209	HA2309 HE2309 H 2309 HS2309	2.3
UKF 210 210 210	1 11/16 1 3/4	45	5 5/8 143	1 9/16 40	4 3/8 111	5/8 16	11/16 17.5	55/64 22	1 29/32 48.7	2 5/32 55	14	1/2	UK 210	F 210	HA2310 HE2310 H 2310	2.6
UKF 211 211 211 211	1 7/8 1 15/16 2	50	6 3/8 162	1 11/16 43	5 1/8 130	3/4 19	49/64 19.5	63/64 25	2 1/16 52.7	2 5/16 59	16	5/8	UK 211	F 211	HS2311 HA2311 H 2311 HE2311	3.5
UKF 212 212	2 1/8	55	6 7/8 175	1 7/8 48	5 5/8 143	3/4 19	49/64 19.5	1 9/64 29	2 9/32 58.0	2 7/16 62	16	5/8	UK 212	F 212	HS2312 H 2312	4.1
UKF 213 213 213 213	2 3/16 2 1/4 2 3/8	60	7 3/8 187	1 31/32 50	5 55/64 149	3/4 19	29/32 23	1 3/16 30	2 13/32 61.5	2 9/16 65	16	5/8	UK 213	F 213	HA2313 HE2313 H 2313 HS2313	5.1
UKF 215 215 215	2 7/16 2 1/2	65	7 7/8 200	2 7/32 56	6 17/64 159	3/4 19	29/32 23	1 11/32 34	2 11/16 68.5	2 7/8 73	16	5/8	UK 215	F 215	HA2315 HE2315 H 2315	6.5
UKF 216 216 216	2 11/16 2 1/2	70	8 3/16 208	2 9/32 58	6 1/2 165	2 29/32 23	15/16 24	1 11/32 34	2 13/16 71.8	3 1/16 78	20	3/4	UK 216	F 216	HA2316 HE2316 H 2316	7.6
UKF 217 217 217	2 5/16 3	75	8 21/32 220	2 15/32 63	6 57/64 175	29/32 23	1 25	1 27/64 36	2 31/32 75.8	3 7/32 82	20	3/4	UK 217	F 217	HA2317 HE2317 H 2317	9.0
UKF 218		80	9 1/4 235	2 11/16 68	7 23/64 187	29/32 23	1 1/32 26	1 37/64 40	3 7/32 81.8	3 3/8 86	20	3/4	UK 218	F 218	HS2318	11.4

각플랜지형 볼베어링 유니트

UKFX

(테이퍼구멍형, 중(中)하중용)

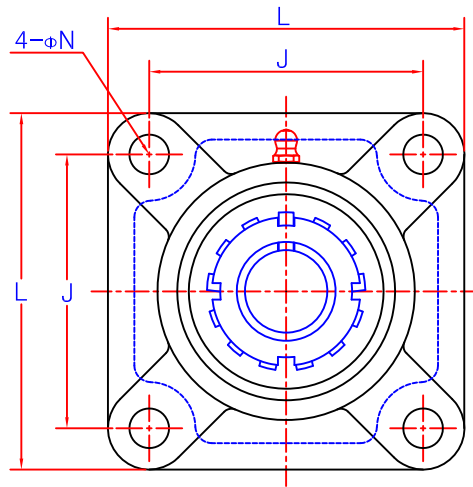
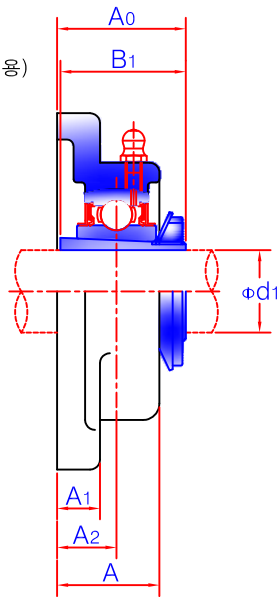


유니트 호칭번호	축지름 d1		주요치수 (in.) (mm)								설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	(in.)	(mm)	L	A	J	N	A1	A2	A0	B1	(mm)	(in.)	호칭번호	호칭번호	어댑터	
UKF X05 X05	3/4	20	4 1/4 108	1 3/16 30	3 17/64 83	15/32 12	1/2 12.7	45/64 18	1 1/2 37.7	1 3/8 35	10	3/8	UK X05	F X05	HE2305 H 2305	1.2
UKF X06 X06 X06 X06	7/8 15/16 1	25	4 19/32 117	1 11/32 34	3 5/8 92	5/8 16	9/16 14.3	3/4 19	1 19/32 40.2	1 1/2 38	14	1/2	UK X06	F X06	HS2306 HA2306 H 2306 HE2306	1.6
UKF X07 X07 X07	1 1/8 1 3/16	30	5 1/8 130	1 1/2 38	4 1/64 102	5/8 16	9/16 14.3	53/64 21	1 23/32 43.7	1 11/16 43	14	1/2	UK X07	F X07	HS2307 H 2307 HA2307	2.0
UKF X08 X08 X08	1 1/4 1 3/8	35	5 13/32 137	1 9/16 40	4 9/64 105	3/4 19	9/16 14.3	55/64 22	1 13/16 46.2	1 13/16 46	16	5/8	UK X08	F X08	HE2308 HS2308 H 2308	2.3
UKF X09 X09 X09 X09	1 7/16 1 1/2 1 5/8	40	5 5/8 143	1 9/16 40	4 3/8 111	3/4 19	9/16 14.3	29/32 23	1 29/32 48.7	1 31/32 50	16	5/8	UK X09	F 209	HA2309 HE2309 H 2309 HS2309	2.7
UKF X10 X10 X10	1 11/16 1 3/4	45	6 3/8 162	1 23/32 44	5 1/8 130	3/4 19	25/32 19.8	1 1/32 26	2 1/8 53.7	2 5/32 55	16	5/8	UK X10	F X10	HA2310 HE2310 H 2310	3.6
UKF X11 X11 X11 X11	1 7/8 1 15/16 2	50	6 7/8 175	1 15/16 49	5 5/8 143	3/4 19	25/32 19.8	1 9/64 29	2 9/32 57.7	2 5/16 59	16	5/8	UK X11	F X11	HS2311 HA2311 H 2311 HE2311	4.6
UKF X12 X12	2 1/8	55	7 3/8 187	2 5/16 59	5 55/64 149	3/4 19	13/16 20.6	1 11/32 34	2 17/32 64.5	2 7/16 62	16	5/8	UK X12	F X12	HS2312 H 2312	5.5
UKF X13 X13 X13 X13	2 3/16 2 1/4 2 3/8	60	7 3/8 187	2 5/16 59	5 55/64 149	3/4 19	13/16 20.6	1 11/32 34	2 21/32 67.5	2 9/16 65	16	5/8	UK X13	F X13	HA2313 HE2313 H 2313 HS2313	6.0
UKF X15 X15 X15	2 1/2 2 5/8	65	7 3/4 197	2 11/16 68	5 63/64 152	29/32 23	15/16 23.8	1 37/64 40	2 31/32 75.5	2 7/8 73	20	3/4	UK X15	F X15	HA2315 HE2315 H 2315	8.1
UKF X16 X16	2 3/4	70	8 7/16 214	2 3/4 70	6 47/64 171	29/32 23	15/16 23.8	1 37/64 40	3 3/32 78.8	3 1/16 78	20	3/4	UK X16	F X16	HE2316 H 2316	9.5
UKF X17 X17 X17 X17	2 7/8 2 15/16 3	75	8 7/16 214	2 3/4 70	6 47/64 171	29/32 23	15/16 23.8	1 37/64 40	3 7/32 81.8	3 7/32 82	20	3/4	UK X16	F X16	HS2317 HA2317 H 2317 HE2317	10.4
UKF X18		80	8 7/16 214	3 76	6 47/64 171	29/32 23	15/16 23.8	1 49/64 45	3 15/32 87.8	3 3/8 86	20	3/4	UK X18	F X18	H 2318	11.4
UKF X20 X20	3 1/2	90	10 9/16 268	3 13/16 97	8 5/16 211	1 7/32 31	1 7/32 31	2 21/64 59	4 5/32 105.8	3 13/16 97	27	1	UK X20	F X20	HE2320 H 2320	18.4

각플랜지형 볼베어링 유니트

UKF3

(테이퍼구멍형, 중(重)하중용)

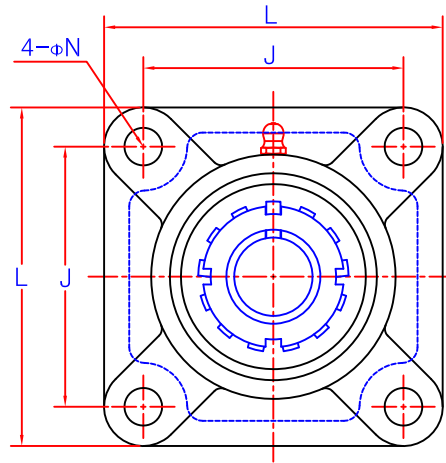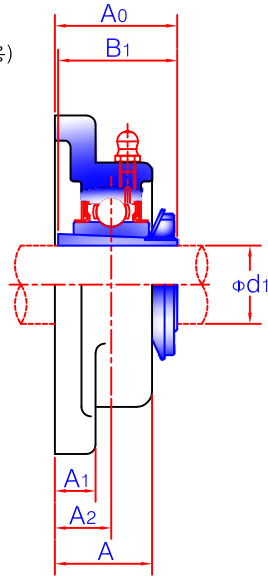


유 니 트 호칭번호	축 지 림		주 요 치 수 (in.) (mm)								설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1		L	A	J	N	A ₁	A ₂	A ₀	B ₁	(mm)	(in.)				
UKF 305 305	3/4	20	4 11/32 110	1 5/32 29	3 5/32 80	5/8 16	1/2 13	5/8 16	1 1/2 37.7	1 3/8 35	14	1/2	UK 305	F 305	HE2305 H 2305	1.4
UKF 306 306 306 306	7/8 15/16 1	25	4 29/32 125	1 1/4 32	3 47/64 95	5/8 16	19/32 15	45/64 18	1 5/8 41.2	1 1/2 38	14	1/2	UK 306	F 306	HS2306 HA2306 H 2306 HE2306	1.9
UKF 307 307 307	1 1/8 1 3/16	30	5 5/16 135	1 13/32 36	3 15/16 100	3/4 19	5/8 16	25/32 20	1 25/32 45.7	1 11/16 43	16	5/8	UK 307	F 307	HS2307 H 2307 HA2307	2.3
UKF 308 308 308	1 1/4 1 3/8	35	5 29/32 150	1 9/16 40	4 13/32 112	3/4 19	21/32 17	29/32 23	2 50.7	1 13/16 46	16	5/8	UK 308	F 308	HE2308 HS2308 H 2308	3.1
UKF 309 309 309 309	1 7/16 1 1/2 1 5/8	40	6 5/16 160	1 23/32 44	4 59/64 125	3/4 19	23/32 18	63/64 25	2 3/16 55.2	1 31/32 50	16	5/8	UK 309	F 309	HA2309 HE2309 H 2309 HS2309	4.1
UKF 310 310 310	1 11/16 1 3/4	45	6 7/8 175	1 7/8 48	5 13/64 132	29/32 23	3/4 19	1 7/64 28	2 3/8 60.2	2 5/32 55	20	3/4	UK 310	F 310	HA2310 HE2310 H 2310	5.1
UKF 311 311 311 311	1 7/8 1 5/16 2	50	7 9/32 185	2 1/16 52	5 33/64 140	29/32 23	25/32 20	1 3/16 30	2 1/2 63.7	2 5/16 59	20	3/4	UK 311	F 311	HS2311 HA2311 H 2311 HE2311	5.9
UKF 312 312	2 1/8	55	7 11/16 195	2 7/32 56	5 29/32 150	29/32 23	7/8 22	1 19/64 33	2 23/32 69.0	2 7/16 62	20	3/4	UK 312	F 312	HS2312 H 2312	6.8
UKF 313 313 313 313	2 3/16 2 1/4 2 3/8	60	8 3/16 208	2 9/32 58	6 17/32 166	29/32 23	7/8 22	1 19/64 33	2 13/16 71.0	2 9/16 65	20	3/4	UK 313	F 313	HA2313 HE2313 H 2313 HS2313	7.9
UKF 315 315	2 1/2	65	9 9/32 236	2 19/32 66	7 1/4 184	63/64 25	1 25	1 17/32 39	3 3/16 81.0	2 7/8 73	22	7/8	UK 315	F 315	HE2315 H 2315	11.7
UKF 316 316	2 3/4	70	9 27/32 250	2 11/16 68	7 23/32 196	1 7/32 31	1 1/16 27	1 1/2 38	3 1/4 82.3	3 1/16 78	27	1	UK 316	F 316	HE2316 H 2316	12.9
UKF 317 317	3	75	10 1/4 260	2 29/32 74	8 1/32 204	1 7/32 31	1 1/16 27	1 47/64 44	3 5/8 91.8	3 7/32 82	27	1	UK 317	F 317	H 2317 HE2317	15.2
UKF 318		80	11 1/32 280	3 76	8 1/2 216	1 3/8 35	1 3/16 30	1 47/64 44	3 5/8 91.8	3 3/8 86	30	1 1/8	UK 318	F 318	H 2318	19.0
UKF 319 319	3 1/4	85	11 13/32 290	3 11/16 94	8 31/32 228	1 3/8 35	1 3/16 30	2 21/64 59	4 3/8 110.8	3 17/32 90	30	1 1/8	UK 319	F 319	HE2319 H 2319	21.9
UKF 320 320	3 1/2	90	12 7/32 310	3 11/16 94	9 17/32 242	1 1/2 38	1 1/4 32	2 21/64 59	4 7/16 112.8	3 13/16 97	33	1 1/4	UK 320	F 320	HE2320 H 2320	25.4
UKF 322 322	4	100	13 3/8 340	3 25/32 96	10 15/32 266	1 39/64 41	1 3/8 35	2 23/64 60	4 23/32 119.8	4 1/8 105	36	1 3/8	UK 322	F 322	HE2322 H 2322	35.2
UKF 324 324	4 7/16	110	14 9/16 370	4 11/32 110	1 27/64 290	1 39/64 41	1 9/16 40	2 9/16 65	5 1/8 130.5	4 13/32 112	36	1 3/8	UK 324	F 324	H 2324 HA2324	47.6
UKF 326 326	4 1/2	115	16 5/32 410	4 17/32 115	12 19/32 320	1 39/64 41	1 25/32 45	2 9/16 65	5 3/16 131.5	4 3/4 121	36	1 3/8	UK 326	F 326	HE2326 H 2326	65.3
UKF 328 328	4 5/16	125	17 23/32 450	4 29/32 125	13 25/32 350	1 39/64 41	2 5/32 55	2 61/64 75	5 13/16 147.5	5 5/32 131	36	1 3/8	UK 328	F 328	H 2328 HA2328	93.4

마개이음볼이 각플랜지형 볼베어링 유니트

UKFS3

(테이퍼구멍형, 중(重)하중용)

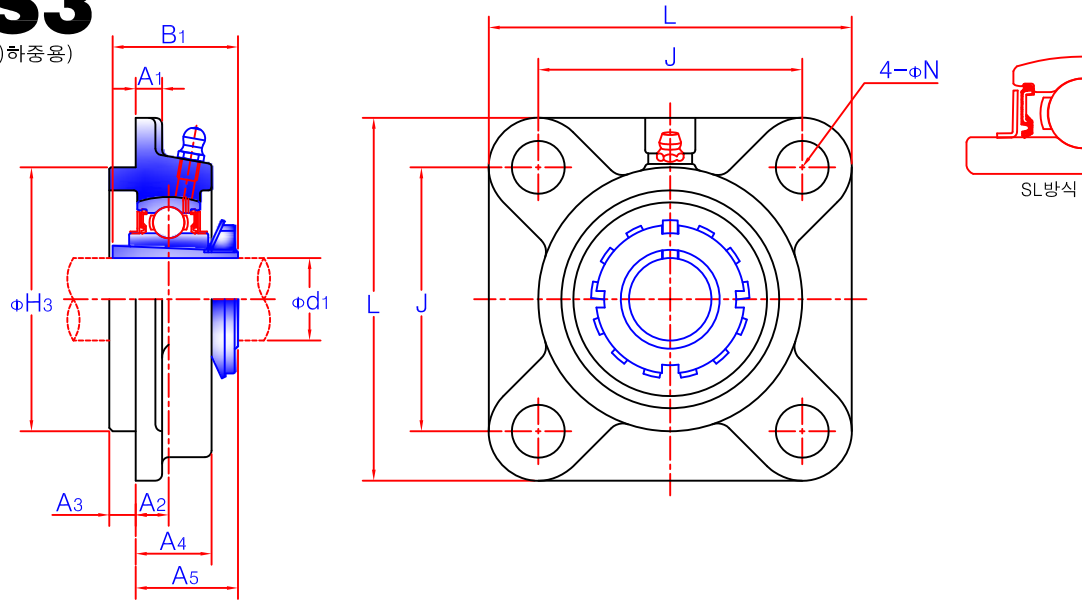


유니트 호칭번호	축지름		주요치수 (in./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1 (in.)	(mm)	L	H3	J	N	A1	A2	A3	A4	A5	B1	(mm)	(in.)				
UKFS 305 305	3/4	20	4 11/32 110	3.1496 80	35/32 80	5/8 16	1/2 13	23/64 9	9/32 7	7/8 22	1.2008 30.5	1.3780 35	14	1/2	UK 305	FS 305	HE2305 H 2305	1.4
UKFS 306 306 306	7/8 1	25	4 29/32 125	3.5433 90	347/64 95	5/8 16	19/32 15	25/64 10	5/16 8	15/16 24	1.2992 33	1.4961 38	14	1/2	UK 306	FS 306	HS2306 H 2306 HE2306	1.9
UKFS 307 307 307	1 1/8 1 3/16	30	5 5/16 135	3.9370 100	3 15/16 100	3/4 19	5/8 16	7/16 11	23/64 9	1 1/16 27	1.4370 36.5	1.6929 43	16	5/8	UK 307	FS 307	HS2307 H 2307 HA2307	2.3
UKFS 308 308 308	1 1/4 1 3/8	35	5 29/32 150	4.5276 115	4 13/32 112	3/4 19	21/32 17	33/64 13	25/64 10	13/16 30	1.5945 40.5	1.8110 46	16	5/8	UK 308	FS 308	HE2308 HS2308 H 2308	3.4
UKFS 309 309 309	1 1/2 1 5/8	40	6 5/16 160	4.9213 125	4 59/64 125	3/4 19	23/32 18	35/64 14	7/16 11	1 5/16 33	1.7323 44	1.9685 50	16	5/8	UK 309	FS 309	HE2309 H 2309 HS2309	4.4
UKFS 310 310 310	1 11/16 1 3/4	45	6 7/8 175	5.5119 140	5 13/64 132	29/32 23	3/4 19	5/8 16	15/32 12	1 13/32 36	1.8898 48	2.1654 55	20	3/4	UK 310	FS 310	HA2310 HE2310 H 2310	5.3
UKFS 311 311 311	1 7/8 2	50	7 9/32 185	5.9055 150	5 33/64 140	29/32 23	25/32 20	43/64 17	33/64 13	1 17/32 39	1.9882 50.5	2.3228 59	20	3/4	UK 311	FS 311	HS2311 H 2311 HE2311	6.1
UKFS 312 312 312	2 1/8	55	7 11/16 195	6.2992 160	5 29/32 150	29/32 23	7/8 22	3/4 19	35/64 14	1 21/32 42	2.1850 55.5	2.4409 62	20	3/4	UK 312	FS 312	HS2312 H 2312	7.4
UKFS 313 313 313	2 1/4 2 3/8	60	8 3/16 208	6.8898 175	6 17/32 166	29/32 23	7/8 22	19/32 15	45/64 18	1 9/16 40	2.1063 53.5	2.5591 65	20	3/4	UK 313	FS 313	HE2313 H 2313 HS2313	8.8
UKFS 315 315	2 1/2	65	9 9/32 236	7.8740 200	7 1/4 184	63/64 25	1 25	53/64 21	45/64 18	1 7/8 48	2.5 63.5	2.8740 73	22	7/8	UK 315	FS 315	HE2315 H 2315	13.7
UKFS 316 316	2 3/4	70	9 27/32 250	8.2677 210	7 23/32 196	1 7/32 31	1 1/16 27	45/64 18	25/32 20	1 7/8 48	2.4606 62.5	3.0709 78	27	1	UK 316	FS 316	HE2316 H 2316	15.1
UKFS 317 317	3	75	10 1/4 260	8.6614 220	8 1/32 204	1 7/32 31	1 1/16 27	15/16 24	25/32 20	2 1/8 54	2.8346 72	3.2283 82	27	1	UK 317	FS 317	H 2317 HE2317	17.3
UKFS 318		80	11 1/32 280	9.4488 240	8 1/2 216	1 3/8 35	1 3/16 30	15/16 24	25/32 20	2 7/32 56	2.8346 72	3.3858 86	30	1 1/8	UK 318	FS 318	H 2318	21.3
UKFS 319 319	3 1/4	85	11 13/32 290	9.8425 250	8 31/32 228	1 3/8 35	1 3/16 30	1 17/32 39	25/32 20	2 29/32 74	3.5827 91	3.5433 90	30	1 1/8	UK 319	FS 319	HE2319 H 2319	24.5
UKFS 320 320	3 1/2	90	12 7/32 310	10.2362 260	9 17/32 242	1 1/2 38	1 1/4 32	1 17/32 39	25/32 20	2 29/32 74	3.6614 93	3.8189 97	33	1 1/4	UK 320	FS 320	HE2320 H 2320	29.5
UKFS 322 322	4	100	13 3/8 340	11.8110 300	10 15/32 266	1 39/64 61	1 3/8 35	1 3/8 35	63/64 25	2 25/32 71	3.7402 95	4.1339 105	36	1 3/8	UK 322	FS 322	H 2322 HE2322	39
UKFS 324 324	4 7/16	110	14 9/16 370	12.9921 330	11 27/64 290	1 39/64 61	1 9/16 40	1 3/8 35	1 3/16 30	3 5/32 80	3.9567 100.5	4.4094 112	36	1 3/8	UK 324	FS 324	H 2324 HA2324	50.6
UKFS 326 326	4 1/2	115	16 5/32 410	14.1732 360	12 19/32 320	1 39/64 61	1 25/32 45	1 3/8 35	1 3/16 30	3 11/32 85	3.9961 101.5	4.7638 121	36	1 3/8	UK 326	FS 326	HE2326 H 2326	67.7
UKFS 328 328	4 15/16	125	17 23/32 450	15.7480 400	13 25/32 350	1 39/64 61	2 5/32 55	1 49/64 45	1 3/16 30	3 3/4 95	4.6260 117.5	5.1575 131	36	1 3/8	UK 328	FS 328	HE2328 H 2328	24.5

마개이음붙이 둥근플랜지형 볼베어링 유니트

UKFC2

(테이퍼구멍형, 중(重)하중용)

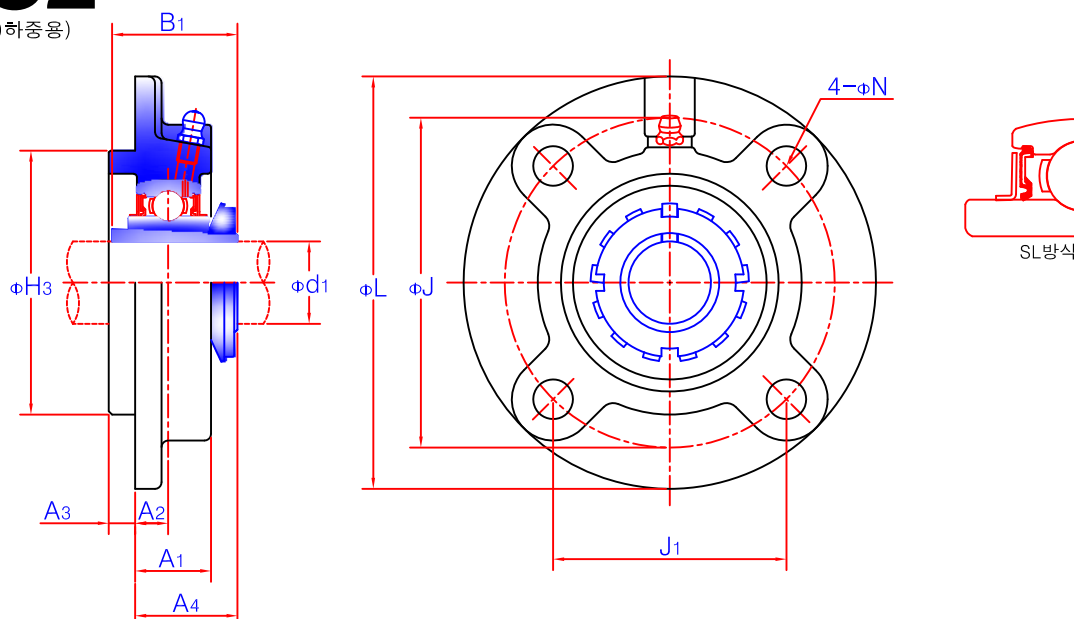


유니트 호칭번호	축지름		주요치수 (in.)(mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1		L	H ₃	J	J ₁	N	A ₁	A ₂	A ₃	A ₄	B ₁	(mm)	(in.)				
UKFC 205 205	3/4	20	417/32 115	23/4 70	335/64 90	21/2 63.6	15/32 12	13/16 21	13/32 10	15/64 6	15/32 29.5	13/8 35	10	4/8	UK 205	FC 205	HE2305 H 2305	0.99
UKFC 206 206 206 206	7/8 15/16 1	25	429/32 125	35/32 80	315/16 100	225/32 70.7	15/32 12	29/32 23	13/32 10	5/16 8	17/32 31	11/2 38	10	4/8	UK 206	FC 206	HS2306 HA2306 H 2306 HE2306	1.3
UKFC 207 207 207	11/8 13/16	30	55/16 135	335/64 90	421/64 110	31/16 77.8	35/64 14	11/32 26	7/16 11	5/16 8	15/16 33.5	111/16 43	12	7/16	UK 207	FC 207	HS2307 H 2307 HA2307	1.7
UKFC 208 208 208	11/4 13/8	35	523/32 145	315/16 100	423/32 120	311/32 84.8	35/64 14	11/32 26	7/16 11	13/32 10	125/64 35.5	113/16 46	12	7/16	UK 208	FC 208	HE2308 HS2308 H 2308	2.0
UKFC 209 209 209 209	17/16 11/2 15/8	40	65/16 160	41/8 105	513/64 132	343/64 93.3	5/8 16	11/32 26	13/32 10	15/32 12	127/64 36	131/32 50	14	1/2	UK 209	FC 209	HA2309 HE2309 H 2309 HS2309	2.7
UKFC 210 210 210	111/16 13/4	45	61/2 165	411/32 110	57/16 138	327/32 97.6	5/8 16	13/32 28	13/32 10	15/32 12	115/32 37.5	25/32 55	14	1/2	UK 210	FC 210	HA2310 HE2310 H 2310	3.0
UKFC 211 211 211 211	17/8 15/16 2	50	79/32 185	429/32 125	529/32 150	411/64 106.1	3/4 19	17/32 31	33/64 13	15/32 12	15/8 41.5	25/16 59	16	5/8	UK 211	FC 211	HS2311 HA2311 H 2311 HE2311	4.3
UKFC 212 212	21/8	55	711/16 195	55/16 135	619/64 160	429/64 113.1	3/4 19	113/32 36	43/64 17	15/32 12	157/64 48.0	27/16 62	16	5/8	UK 212	FC 212	HS2312 H 2312	4.9
UKFC 213 213 213 213	23/16 21/4 23/8	60	81/16 205	523/32 145	611/16 170	447/64 120.2	3/4 19	113/32 36	5/8 16	35/64 14	159/64 49	29/16 65	16	5/8	UK 213	FC 213	HA2313 HE2313 H 2313 HS2313	5.5
UKFC 215 215 215	27/16 21/2	65	821/32 220	65/16 160	71/4 184	51/8 130.1	3/4 19	19/16 40	45/64 18	5/8 16	27/64 53.5	27/8 73	16	5/8	UK 215	FC 215	HA2315 HE2315 H 2315	7.4
UKFC 216 216 216	211/16 23/4	70	97/16 240	611/16 170	77/8 200	59/16 141.4	29/32 23	121/32 42	45/64 18	5/8 16	21/4 57	31/16 78	20	3/4	UK 216	FC 216	HA2316 HE2316 H 2316	9.0
UKFC 217 217 217	215/16 3	75	927/32 250	73/32 180	83/16 208	551/64 147.1	29/32 23	125/32 45	45/64 18	45/64 18	221/64 59	37/32 82	20	3/4	UK 217	FC 217	HA2317 H 2317 HE2317	10.4
UKFC 218		80	1077/16 265	715/32 190	281/32 220	61/8 155.5	29/32 23	131/32 50	55/64 22	45/64 18	235/64 64.5	33/8 86	20	3/4	UK 218	FC 218	H 2318	13.3

마개이음볼이 등근플랜지형 볼베어링 유닛

UKFCX

(테이퍼구멍형, 중(中)하중용)

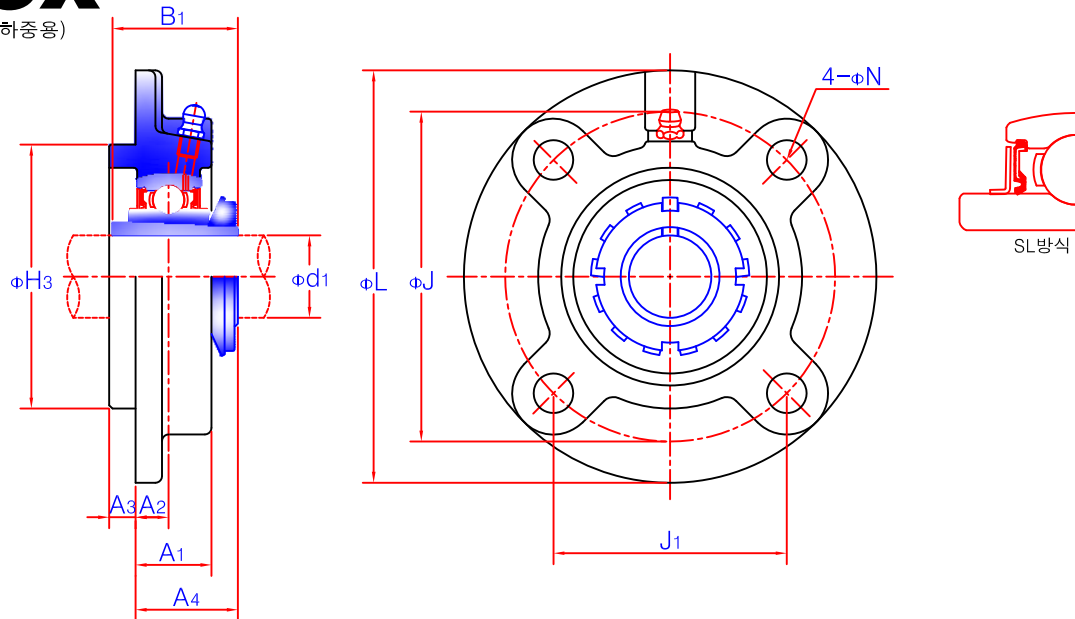


유닛 호칭번호	축 지름		주요 치수 (in./mm)										설치볼트 호칭번호		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1																	
	(in.)	(mm)	L	H3	J	J1	N	A1	A2	A3	A4	B1	(mm)	(in.)				
UKFC X05 X05	3/4	20	43/8 111	3 76	35/8 92	29/16 65.0	3/8 9.5	15/16 24.0	13/32 10	15/64 6.0	17/32 31	13/8 35	8	5/16	UK X05	FC X05	HE2305 H 2305	1.2
UKFC X06 X06 X06 X06	7/8 15/16 1	25	5 127	311/32 85	49/64 105	259/64 74.2	15/32 12	7/8 22.5	5/16 8	3/8 9.5	15/32 29.5	11/2 38	10	3/8	UK X06	FC X06	HS2306 HA2306 H 2306 HE2306	1.5
UKFC X07 X07 X07	11/8 13/16	30	51/4 133	35/8 92	43/8 111	33/32 78.5	15/32 12	11/32 26.0	23/64 9	7/16 11.0	19/32 32.5	111/16 43	10	3/8	UK X07	FC X07	HS2307 H 2307 HA2307	1.9
UKFC X08 X08 X08	11/4 13/8	35	51/4 133	35/8 92	43/8 111	33/32 78.5	15/32 12	11/32 26.0	23/64 9	7/16 11.0	111/32 34	113/16 46	10	3/8	UK X08	FC X08	HE2308 HS2308 H 2308	1.9
UKFC X09 X09 X09 X09	17/16 11/2 15/8	40	63/32 155	41/4 108	51/8 130	35/8 91.9	35/64 14	1 25.0	5/16 8	15/32 12.0	123/64 34.5	131/32 50	12	7/16	UK X09	FC X09	HA2309 HE2309 H 2309 HS2309	2.6
UKFC X10 X10 X10	111/16 13/4	45	63/8 162	441/64 118	523/64 136	325/32 96.2	35/64 14	1 25.0	9/32 7	5/8 16.0	125/64 35.5	25/32 55	12	7/16	UK X10	FC X10	HA2310 HE2310 H 2310	3.1
UKFC X11 X11 X11 X11	17/8 15/16 2	50	73/32 180	5 127	563/64 152	415/64 107.5	5/8 16	11/32 26.0	5/32 4	55/64 22.0	111/32 34	25/16 59	14	1/2	UK X11	FC X11	HS2311 HA2311 H 2311 HE2311	4.0
UKFC X12 X12	21/8	55	75/8 194	51/2 140	61/2 165	419/32 116.7	5/8 16	15/16 33.0	7/16 11	25/32 20.0	111/16 43	27/16 62	14	1/2	UK X12	FC X12	HS2312 H 2312	5.1
UKFC X13 X13 X13 X13	23/16 21/4 23/8	60	75/8 194	51/2 140	61/2 165	419/32 116.7	5/8 16	5/16 33.0	7/16 11	25/32 20.0	125/32 45	29/16 65	14	1/2	UK X13	FC X13	HA2313 HE2313 H 2313 HS2313	5.3
UKFC X15 X15 X15	21/2 25/8	65	83/4 222	615/32 164	731/64 190	59/32 134.3	3/4 19	13/8 35.0	15/32 12	55/64 22.0	115/16 49	27/8 73	16	5/8	UK X15	FC X15	HA2315 HE2315 H 2315	7.7
UKFC X16 X16	23/4	70	101/4 260	75/16 186	85/8 219	63/32 154.8	29/32 23	113/32 36.0	13/32 10	63/64 25.0	131/32 50	31/16 78	20	3/4	UK X16	FC X16	HE2316 H 2316	11.4
UKFC X17 X17 X17 X17	27/8 25/16 3	75	101/4 260	75/16 186	85/8 219	63/32 154.8	29/32 23	113/32 36.0	13/32 10	63/64 25.0	21/16 52.5	37/32 82	20	3/4	UK X17	FC X17	HS2317 HA2317 H 2317 HE2317	12.6
UKFC X18		80	101/4 260	75/16 186	85/8 219	63/32 154.8	29/32 23	111/16 43	15/32 12	13/32 28	25/32 55	33/8 86	20	3/4	UK X18	FC X18	H 2318	14.0
UKFC X20 X20	31/2	90	107/8 276	81/8 206	93/8 238	65/8 168.3	29/32 23	219/32 66	7/8 22	13/32 28	223/32 69	313/16 97	20	3/4	UK X20	FC X20	HE2320 H 2320	15.0

마개이음볼이 등극플랜지형 볼베어링 유니트

UKFCC2

(테이퍼구멍형, 중(重)하중용)

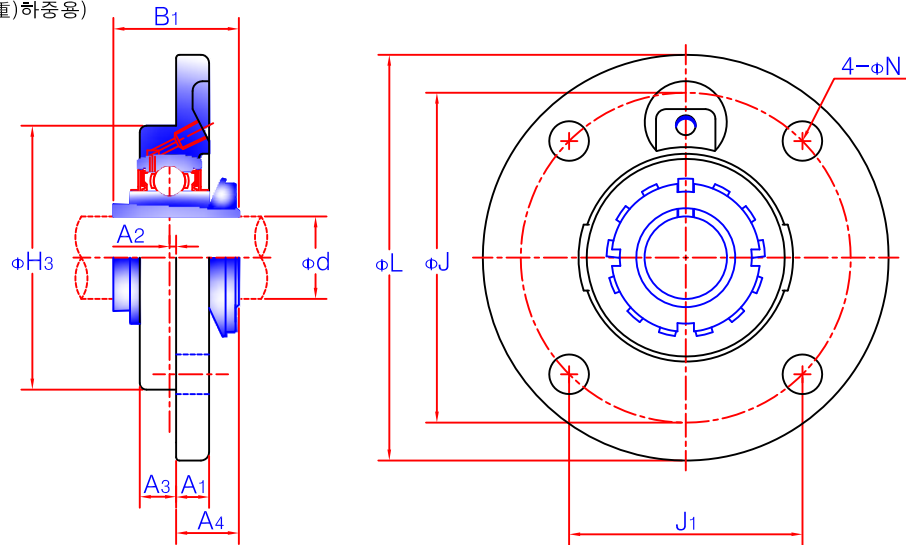


유니트 호칭번호	축지름		주요치수 (in./mm)										설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1																	
	(in.)	(mm)	L	H3	J	J1	N	A1	A2	A3	A4	B1	(mm)	(in.)				
UKFCC 205 205	3/4	20	4 ^{17/32} 115	2 ^{3/4} 70	3 ^{35/64} 90	2 ^{1/2} 63.6	2 ^{3/64} 9	2 ^{3/64} 9	3/32 2.5	1 ^{3/32} 10	2 ^{1/32} 17	1 ^{3/8} 35	8	5/16	UK 205	FCC 205	HE2305 H 2305	0.74
UKFCC 206 206 206 206	7/8 15/16 1	25	4 ^{27/32} 123	3 ^{5/32} 80	3 ^{15/16} 100	2 ^{25/32} 70.7	1 ^{5/32} 12	1 ^{3/32} 10	1/8 3	7/16 11	4 ^{5/64} 18	1 ^{1/2} 38	10	3/8	UK 206	FCC 206	HS2306 HA2306 H 2306 HE2306	0.89
UKFCC 207 207 207	1 ^{1/8} 13/16	30	5 ^{5/16} 135	3 ^{35/64} 90	4 ^{21/64} 110	3 ^{1/16} 77.8	2 ^{9/64} 11.5	1 ^{3/32} 10	3/64 1	1 ^{3/32} 10.5	2 ^{7/32} 21.5	1 ^{11/16} 43	10	3/8	UK 207	FCC 207	HS2307 H 2307 HA2307	1.11
UKFCC 208 208 208	1 ^{1/4} 13/8	35	5 ^{23/32} 145	3 ^{15/16} 100	4 ^{23/32} 120	3 ^{11/32} 84.9	2 ^{9/64} 11.5	2 ^{9/64} 11.5	1/16 1.5	1/2 12.5	2 ^{9/32} 23	1 ^{13/16} 46	10	3/8	UK 208	FCC 208	HE2308 HS2308 H 2308	1.49
UKFCC 209 209 209 209	1 ^{7/16} 1 ^{1/2} 15/8	40	6 ^{3/32} 155	4 ^{1/8} 105	5 ^{1/8} 130	3 ^{5/8} 91.9	3 ^{5/64} 14	1 ^{5/32} 12	5/64 2	1/2 13	1 ^{5/16} 24	1 ^{31/32} 50	12	7/16	UK 209	FCC 209	HA2309 HE2309 H 2309 HS2309	1.90
UKFCC 210 210 210	1 ^{11/16} 1 ^{3/4}	45	6 ^{1/2} 165	4 ^{11/32} 110	5 ^{5/16} 135	3 ^{3/4} 95.5	3 ^{5/64} 14	1/2 13	3/64 1	1 ^{5/32} 12	1 ^{3/64} 26.5	2 ^{5/32} 55	12	7/16	UK 210	FCC 210	HA2310 HE2310 H 2310	2.01
UKFCC 211 211 211 211	1 ^{7/8} 1 ^{15/16} 2	50	7 ^{9/32} 185	4 ^{29/32} 125	5 ^{29/32} 150	4 ^{11/64} 106	4 ^{5/64} 18	1 ^{9/32} 15	0 0	3 ^{1/64} 12.5	1 ^{1/8} 28.5	2 ^{5/16} 59	16	5/8	UK 211	FCC 211	HS2311 HA2311 H 2311 HE2311	2.90
UKFCC 212 212	2 ^{1/8}	55	7 ^{11/16} 195	5 ^{5/16} 135	6 ^{5/16} 160	4 ^{29/64} 113.1	4 ^{5/64} 18	5/8 16	-1/2 -0.5	1/2 13	1 ^{13/64} 30.5	2 ^{7/16} 62	16	5/8	UK 212	FCC 212	HS2312 H 2312	3.44

마름모플랜지형 볼베어링 유니트

UKFL2

(테이퍼구멍형, 경(輕)하중용)

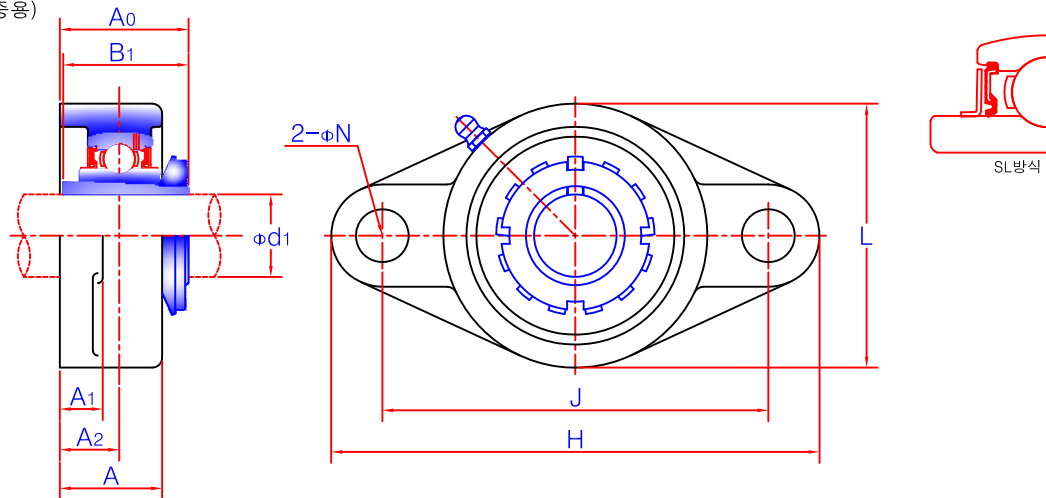


유 니 트 호칭번호	축 지 림		주 요 치 수 (In.) (mm)									설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	A ₁	A ₂	A ₀	B ₁	(mm)	(in.)				
UKFL 205 205	3/4	20	5 1/8 130	2 11/16 68	1 1/16 27	3 57/64 99	5/8 16	1/2 13	5/8 16	1 3/8 34.7	1 3/8 35	14	1/2	UK 205	FL 205	HE2305 H 2305	0.68
UKFL 206 206 206 206	7/8 15/16 1	25	5 13/16 148	3 5/32 80	1 7/32 31	4 39/64 117	5/8 16	1/2 13	45/64 18	1 1/2 37.7	1 1/2 38	14	1/2	UK 206	FL 206	HS2306 HA2306 H 2306 HE2306	0.97
UKFL 207 207 207	1 1/8 1 3/16	30	6 11/32 161	3 17/32 90	1 11/32 34	5 1/8 130	5/8 16	19/32 15	3/4 19	1 5/8 41.2	1 11/16 43	14	1/2	UK 207	FL 207	HS2307 H 2307 HA2307	1.3
UKFL 208 208 208	1 1/4 1 3/8	35	6 7/8 175	3 15/16 100	1 13/32 36	5 43/64 144	5/8 16	19/32 15	53/64 21	1 3/4 44.7	1 13/16 46	14	1/2	UK 208	FL 208	HE2308 HS2308 H 2308	1.6
UKFL 209 209 209 209	1 7/16 1 1/2 1 5/8	40	7 13/32 188	4 1/4 108	1 1/2 38	5 53/64 148	3/4 19	5/8 16	55/64 22	1 7/8 47.2	1 31/32 50	16	5/8	UK 209	FL 209	HA2309 HE2309 H 2309 HS2309	2.0
UKFL 210 210 210	1 11/16 1 3/4	45	7 3/4 197	4 17/32 115	1 9/16 40	6 3/16 157	3/4 19	5/8 16	55/64 22	1 29/32 48.7	2 5/32 55	16	5/8	UK 210	FL 210	HA2310 HE2310 H 2310	2.3
UKFL 211 211 211 211	1 7/8 1 15/16 2	50	8 13/16 224	5 1/8 130	1 11/16 43	7 1/4 184	3/4 19	23/32 18	63/64 25	2 1/16 52.7	2 5/16 59	16	5/8	UK 211	FL 211	HS2311 HA2311 H 2311 HE2311	3.3
UKFL 212 212	2 1/8	55	9 27/32 250	5 1/2 140	1 7/8 48	7 61/64 202	29/32 23	23/32 18	1 9/64 29	2 9/32 58	2 7/16 62	20	3/4	UK 212	FL 212	HS2312 H 2312	4.1
UKFL 213 213 213 213	2 3/16 2 1/4 2 3/8	60	10 5/32 258	6 3/32 155	1 31/32 50	8 17/64 210	29/32 23	7/8 22	1 3/16 30	2 13/32 61.5	2 9/16 65	20	3/4	UK 213	FL 213	HA2313 HE2313 H 2313 HS2313	5.0
UKFL 215 215 215	2 7/16 2 1/2	65	10 13/16 275	6 1/2 165	2 7/32 56	8 55/64 225	29/32 23	7/8 22	1 11/32 34	2 11/16 68.5	2 7/8 73	20	3/4	UK 215	FL 215	HA2315 HE2315 H 2315	6.6
UKFL 216 216 216	2 11/16 2 3/4	70	11 13/32 290	7 3/32 180	2 9/32 58	9 11/64 233	63/64 25	7/8 22	1 11/32 34	2 13/16 71.8	3 1/16 78	22	7/8	UK 216	FL 216	HA2316 HE2316 H 2316	8.1
UKFL 217 217 217	2 15/16 3	75	12 305	7 15/32 190	2 15/32 63	9 49/64 248	63/64 25	15/16 24	1 27/64 36	2 31/32 75.8	3 7/32 82	22	7/8	UK 217	FL 217	HA2317 H 2317 HE2317	9.9
UKFL 218		80	10 19/32 320	8 1/16 205	2 11/16 68	10 7/16 265	63/64 25	15/16 24	1 37/64 40	3 7/32 81.8	3 3/8 86	22	7/8	UK 218	FL 218	H 2318	12.2

마름모플랜지형 볼베어링 유니트

UKFLX

(테이퍼구멍형, 중(中)하중용)

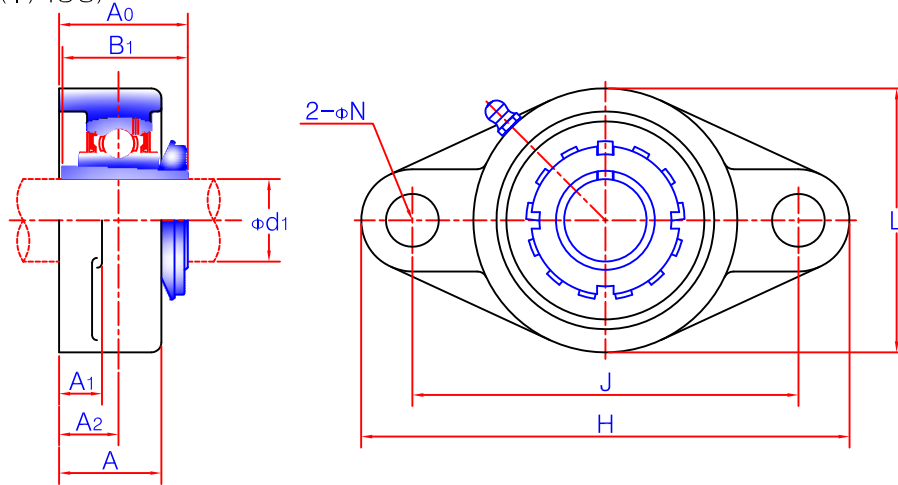


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)										설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1																	
	(in.)	(mm)	H	L	A	J	N	A ₁	A ₂	A ₀	B ₁	(mm)	(in.)					
UKFL X05 X05	3/4	20	5 _{9/16} 141	3 _{9/32} 83	1 _{3/16} 30	4 _{39/64} 117	15/32 12	1/2 13	45/64 18	1 _{1/2} 37.7	1 _{3/8} 35	10	3/8	UK X05	FL X05	HE2305 H 2305	1.0	
UKFL X06 X06 X06 X06	7/8 15/16 1	25	6 _{5/32} 156	3 _{3/4} 95	1 _{11/32} 34	5 _{1/8} 130	5/8 16	19/32 15	3/4 19	1 _{19/32} 40.2	1 _{1/2} 38	14	1/2	UK X06	FL X06	HS2306 HA2306 H 2306 HE2306	1.5	
UKFL X07 X07 X07	1 _{1/8} 1 _{3/16}	30	6 _{23/32} 171	4 _{1/8} 105	1 _{1/2} 38	5 _{43/64} 144	5/8 16	5/8 16	53/64 21	1 _{23/32} 43.7	2 _{11/16} 43	14	1/2	UK X07	FL X07	HS2307 H 2307 HA2307	1.8	
UKFL X08 X08 X08	1 _{1/4} 1 _{3/8}	35	7 _{1/16} 179	4 _{3/8} 111	1 _{9/16} 40	5 _{53/64} 148	5/8 16	5/8 16	55/64 22	1 _{13/16} 46.2	1 _{13/16} 46	14	1/2	UK X08	FL X208	HE2308 HS2308 H 2308	2.1	
UKFL X09 X09 X09 X09	1 _{7/16} 1 _{1/2} 1 _{5/8}	40	7 _{7/16} 189	4 _{9/16} 116	1 _{9/16} 40	6 _{3/16} 157	5/8 16	5/8 16	29/32 23	1 _{29/32} 48.7	1 _{31/32} 50	14	1/2	UK X09	FL X09	HA2309 HE2309 H 2309 HS2309	2.5	
UKFL X10 X10 X10	1 _{11/16} 1 _{3/4}	45	8 _{1/2} 216	5 _{1/4} 133	1 _{23/32} 44	7 _{1/4} 184	3/4 19	45/64 18	1 _{1/32} 26	2 _{1/8} 53.7	2 _{5/32} 55	16	5/8	UK X10	FL X10	HA2310 HE2310 H 2310	3.7	

마름모플랜지형 볼베어링 유니트

UKFL3

(테이퍼구멍형, 중(重)하중용)

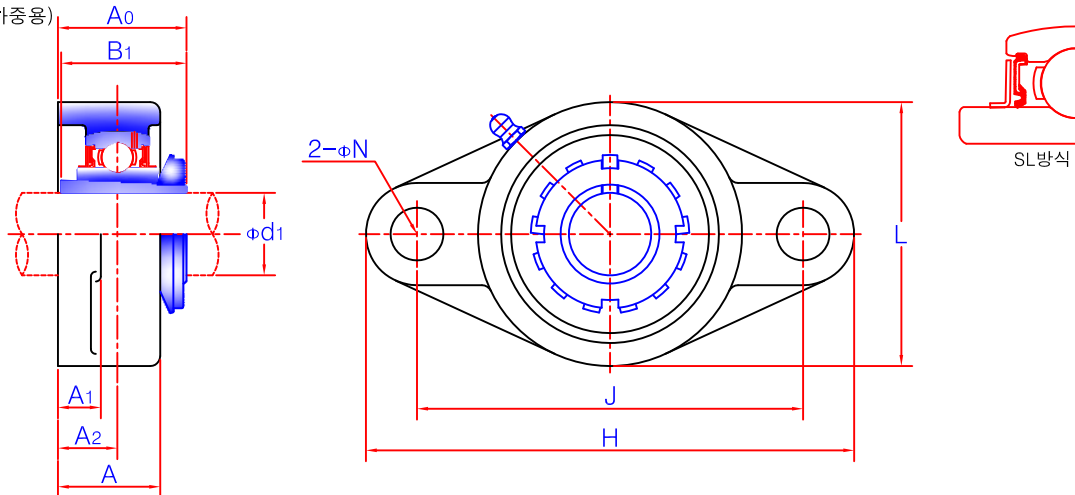


유 니 트 호칭번호	축 지 름		주 요 치 수 (In.) (mm)									설치볼트 호 칭		베 어 링 호칭번호	하 우 징 호칭번호	적 용 어댑터	중량 (kgf)
	d1		H	L	A	J	N	A ₁	A ₂	A ₀	B ₁						
	(in.)	(mm)										(mm)	(in.)				
UKFL 305 305	3/4	20	529/32 150	35/32 80	15/32 29	429/64 113	3/4 19	1/2 13	5/8 16	1.4764 37.5	1.3780 35	16	5/8	UK 305	FL 305	HE2305 H 2305	1.1
UKFL 306 306 306	7/8 1	25	73/32 180	317/32 90	11/4 32	59/32 134	29/32 23	19/32 15	45/64 18	1.6142 41	1.4961 38	20	3/4	UK 306	FL 306	HS2306 H 2306 HE2306	1.5
UKFL 307 307 307	11/8 13/16	30	79/32 185	315/16 100	113/32 36	535/64 141	29/32 23	5/8 16	25/32 20	1.7913 45.5	1.6929 43	20	3/4	UK 307	FL 307	HS2307 H 2307 HA2307	1.8
UKFL 308 308 308	11/4 13/8	35	77/8 200	413/32 112	19/16 40	67/32 158	29/32 23	21/32 17	29/32 23	1.9882 50.5	1.8110 46	20	3/4	UK 308	FL 308	HE2308 HS2308 H 2308	2.5
UKFL 309 309 309	11/2 15/8	40	91/16 230	429/32 125	123/32 44	631/32 177	63/64 25	23/24 18	63/64 25	2.1654 55	1.9685 50	22	7/8	UK 309	FL 309	HE2309 H 2309 HS2309	3.5
UKFL 310 310 310	111/16 13/4	45	97/16 240	51/2 140	17/8 48	723/64 187	63/64 25	3/4 19	17/64 28	2.3622 60	2.1654 55	22	7/8	UK 310	FL 310	HA2310 HE2310 H 2310	4.4
UKFL 311 311 311	17/8 2	50	927/32 250	529/32 150	21/16 52	751/64 198	63/64 25	25/32 20	13/16 30	2.5000 63.5	2.3228 59	22	7/8	UK 311	FL 311	HS2311 H 2311 HE2311	5.3
UKFL 312 312	21/8	55	105/8 270	65/16 160	27/32 56	811/32 212	17/32 31	7/8 22	119/64 33	2.7362 69.5	2.4409 62	27	1	UK 312	FL 312	HS2312 H 2312	6.5
UKFL 313 313 313	21/4 23/8	60	115/8 295	67/8 175	29/32 58	929/64 240	17/32 31	1 25	119/64 33	2.8150 71.5	2.5591 65	27	1	UK 313	FL 313	HE2313 H 2313 HS2313	8.5
UKFL 315 315	21/2	65	1219/32 320	711/16 195	219/32 66	1015/64 260	13/8 35	13/16 30	117/32 39	3.2087 81.5	2.8740 73	30	11/8	UK 315	FL 315	HE2315 H 2315	11.3
UKFL 316 316 316	23/4	70	1031/32 355	89/32 210	211/16 68	117/32 285	11/2 38	11/4 32	11/2 38	3.2480 82.5	3.0709 78	33	11/4	UK 316	FL 316	HE2316 H 2316	14.4
UKFL 317 317 317		75	149/16 370	821/32 220	229/32 74	1113/16 300	11/2 38	11/4 32	147/64 44	3.6220 92	3.2283 82	33	11/4	UK 317	FL 317	H 2317 HE2317	16.0
UKFL 318		80	155/32 385	91/4 235	3 76	1213/32 315	11/2 38	113/32 36	147/64 44	3.6220 92	3.3858 86	33	11/4	UK 318	FL 318	H 2318	19.0
UKFL 319 319 319	31/4	85	1515/16 405	927/32 250	311/16 94	13 330	139/64 41	19/16 40	221/64 59	4.3701 111	3.5433 90	36	13/8	UK 319	FL 319	HE2319 H 2319	24.6
UKFL 320 320 320	31/2	90	175/16 440	105/8 270	311/16 94	1411/64 360	147/64 44	19/16 40	221/64 59	4.4488 113	3.8189 97	39	11/2	UK 320	FL 320	HE2320 H 2320	29.4
UKFL 322 322 322		100	181/2 470	1113/16 300	325/32 96	1523/64 390	147/64 44	121/32 42	223/64 60	4.7244 120	4.1339 105	39	11/2	UK 322	FL 322	H 2322 HE2322	36.2
UKFL 324 324 324	47/16	110	2015/32 520	13 330	411/32 110	1659/64 430	127/32 47	17/8 48	29/16 65	5.1378 130.5	4.4094 112	42	15/8	UK 324	FL 324	H 2324 HA2324	51.6
UKFL 326 326 326	41/2	115	2121/32 550	143/16 360	417/32 115	187/64 460	427/32 47	131/32 50	29/16 65	5.1792 131.5	4.7638 121	42	15/8	UK 326	FL 326	HE2326 H 2326	61.6
UKFL 328 328 328	415/16	125	235/8 600	153/4 400	429/32 125	1911/16 500	2 51	23/8 60	261/64 75	5.8071 147.5	5.1575 131	45	13/4	UK 328	FL 328	HE2328 H 2328	68.4

테이크-업형 볼베어링 유닛

UKT2

(테이퍼구멍형, 경(輕)하중용)

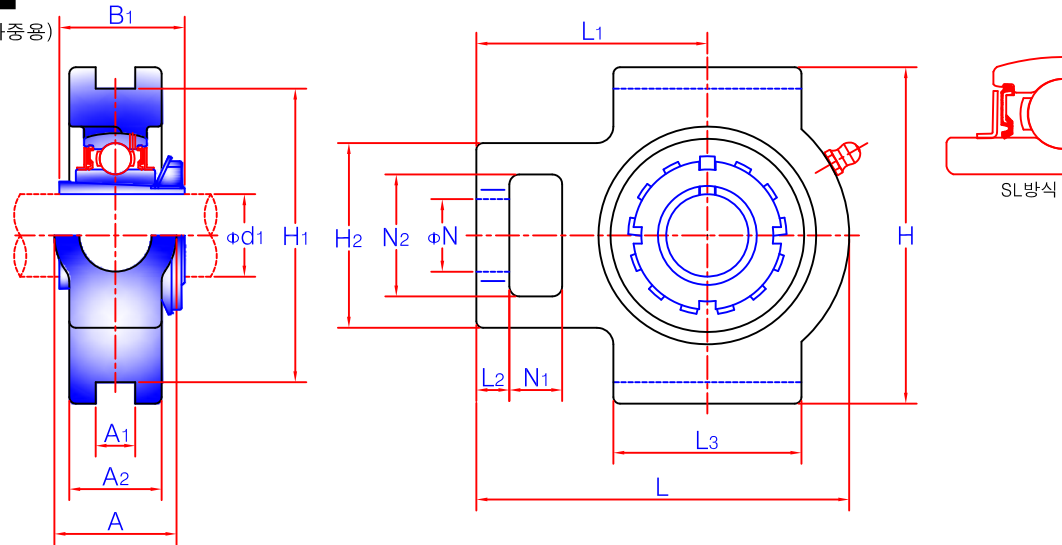


유닛 호칭번호	축지름 d1		주요치수 (in.) (mm)														베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	(in.)	(mm)	A	A1	A2	H	H1	H2	L	L1	L2	L3	N	N1	N2	B1	호칭번호	호칭번호	어댑터	
UKT 205 205	3/4	20	1 1/4 32	15/32 12	15/16 24	3 1/2 89	2 3/4 76	2 51	3 13/16 97	2 7/16 62	13/32 10	2 51	3/4 19	5/8 16	1 1/4 32	13/8 35	UK 205	T 205	HE2305 H 2305	0.88
UKT 206 206 206 206	7/8 15/16 1	25	1 15/32 37	15/32 12	13/32 28	4 1/32 102	3 1/2 89	2 7/32 56	4 7/16 113	2 3/4 70	13/32 10	2 1/4 57	55/64 22	5/8 16	1 15/32 37	1 1/2 38	UK 206	T 206	HS2306 HA2306 H 2306 HE2306	1.3
UKT 207 207 207	1 1/8 1 3/16	30	1 15/32 37	15/32 12	13/16 30	4 1/32 102	3 1/2 89	2 17/32 64	5 3/32 129	3 1/16 78	1/2 13	2 17/32 64	55/64 22	5/8 16	1 15/32 37	1 11/16 43	UK 207	T 207	HS2307 H 2307 HA2307	1.7
UKT 208 208 208	1 1/4 1 3/8	35	1 15/16 49	5/8 16	1 5/16 33	4 1/2 114	4 1/4 102	3 9/32 83	5 21/32 144	3 15/32 88	5/8 16	3 9/32 83	19/64 29	3/4 19	1 15/16 49	1 13/16 46	UK 208	T 208	HE2308 HS2308 H 2308	2.5
UKT 209 209 209 209	1 7/16 1 1/2 1 5/8	40	1 15/16 49	5/8 16	1 3/8 35	4 19/32 117	4 1/4 102	3 9/32 83	5 21/32 144	3 7/16 87	5/8 16	3 9/32 83	19/64 29	3/4 19	1 15/16 49	1 31/32 50	UK 209	T 209	HA2309 HE2309 H 2309 HS2309	2.5
UKT 210 210 210	1 11/16 1 3/4	45	1 15/16 49	5/8 16	1 15/32 37	4 19/32 117	4 1/4 102	3 9/32 83	5 7/8 149	3 17/32 90	5/8 16	3 3/8 86	19/64 29	3/4 19	1 15/16 49	2 5/32 55	UK 210	T 210	HA2310 HE2310 H 2310	2.7
UKT 211 211 211 211	1 7/8 1 15/16 2	50	2 17/32 64	55/64 22	1 1/2 38	5 3/4 146	5 1/8 130	4 1/32 102	6 23/32 171	4 3/16 106	3/4 19	3 3/4 95	1 3/8 35	1 25	2 17/32 64	2 5/16 59	UK 211	T 211	HS2311 HA2311 H 2311 HE2311	4.1
UKT 212 212	2 1/8	55	2 17/32 64	55/64 22	1 21/32 42	5 3/4 146	5 1/8 130	4 1/32 102	7 5/8 194	4 11/16 119	3/4 19	4 1/32 102	1 3/8 35	1 1/4 32	2 17/32 64	2 7/16 62	UK 212	T 212	HS2312 H 2312	4.8
UKT 213 213 213 213	2 3/16 2 1/4 2 3/8	60	2 3/4 70	1 1/32 26	1 23/32 44	6 9/16 167	5 15/16 151	4 3/8 111	8 13/16 224	5 13/32 137	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	2 9/16 65	UK 213	T 213	HA2313 HE2313 H 2313 HS2313	6.8
UKT 215 215 215	2 7/16 2 1/2	65	2 3/4 70	1 1/32 26	1 7/8 48	6 9/16 167	5 15/16 151	4 3/8 111	9 1/8 232	5 1/2 140	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	2 7/8 73	UK 215	T 215	HA2315 HE2315 H 2315	7.4
UKT 216 216 216	2 11/16 2 3/4	70	2 3/4 70	1 1/32 26	2 51	7 1/4 184	6 1/2 165	4 3/8 111	9 1/4 235	5 1/2 140	13/16 21	4 3/4 121	1 39/64 41	1 1/4 32	2 3/4 70	3 1/16 78	UK 216	T 216	HA2316 HE2316 H 2316	8.5
UKT 217 217 217	2 5/16 3	75	2 7/8 73	1 3/16 30	2 1/8 54	7 25/32 198	6 13/16 173	4 7/8 124	10 1/4 260	6 3/8 162	1 5/32 29	6 3/16 157	1 57/64 48	1 1/2 38	2 7/8 73	3 7/32 82	UK 217	T 217	HA2317 H 2317 HE2317	11.2

테이크-업형 볼베어링 유니트

UKTX

(테이퍼구멍형, 중(中)하중용)

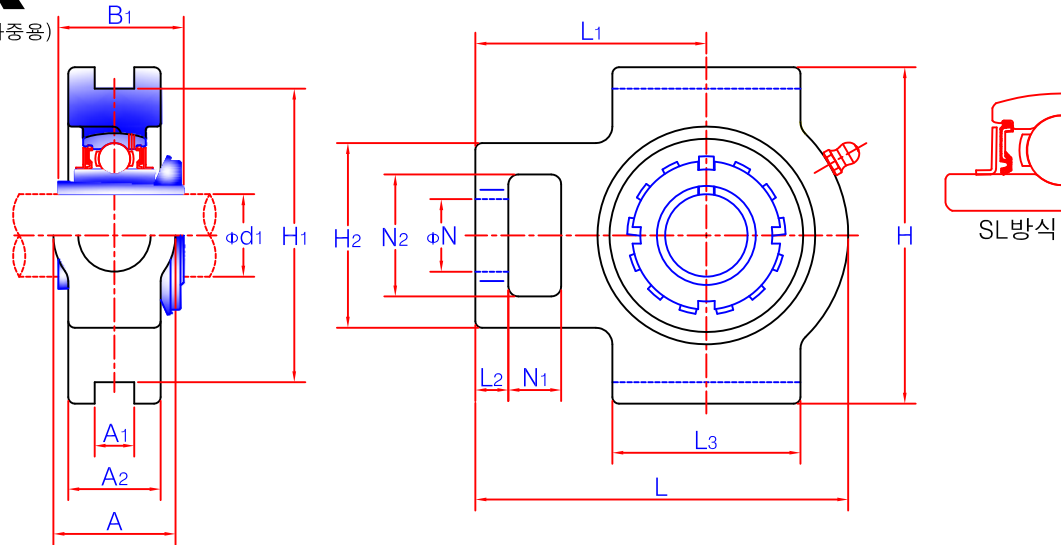


유니트 호칭번호	축지름		주요치수 (in./mm)														베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1	(mm)	A	A1	A2	H	H1	H2	L	L1	L2	L3	N	N1	N2	B1				
UKT X05 X05	3/4	20	1 ¹⁵ / ₃₂ 37	15 ³ / ₃₂ 12	13 ³ / ₃₂ 28	4 ¹ / ₃₂ 102	3 ¹ / ₂ 89	2 ⁷ / ₃₂ 56	4 ⁷ / ₁₆ 113	2 ³ / ₄ 70	13 ³ / ₃₂ 10	2 ¹ / ₄ 57	55 ⁵ / ₆₄ 22	5 ⁸ / ₁₆ 16	1 ¹⁵ / ₃₂ 37	13 ⁸ / ₃₅ 35	UK X05	T X05	HE2305 H 2305	1.3
UKT X06 X06 X06 X06	7/8 15/16 1	25	1 ¹⁵ / ₃₂ 37	15 ³ / ₃₂ 12	13 ³ / ₁₆ 30	4 ¹ / ₃₂ 102	3 ¹ / ₂ 89	2 ¹⁷ / ₃₂ 64	5 ³ / ₃₂ 129	3 ¹ / ₁₆ 78	1 ² / ₂ 13	2 ¹⁷ / ₃₂ 64	55 ⁵ / ₆₄ 22	5 ⁸ / ₁₆ 16	1 ¹⁵ / ₃₂ 37	1 ¹ / ₂ 38	UK X06	T X06	HS2306 HA2306 H 2306 HE2306	1.7
UKT X07 X07 X07	1 ¹ / ₈ 13/16	30	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹³ / ₃₂ 36	4 ¹ / ₂ 114	4 ¹ / ₆₄ 102	3 ⁹ / ₃₂ 83	5 ²¹ / ₃₂ 144	3 ¹⁵ / ₃₂ 88	19 ³ / ₃₂ 15	3 ⁹ / ₃₂ 83	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	1 ¹¹ / ₁₆ 43	UK X07	T X07	HS2307 H 2307 HA2307	2.6
UKT X08 X08 X08	1 ¹ / ₄ 13/8	35	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹³ / ₃₂ 36	4 ¹⁹ / ₃₂ 117	4 ¹ / ₂ 102	3 ⁹ / ₃₂ 83	5 ²¹ / ₃₂ 144	3 ⁷ / ₁₆ 87	19 ³ / ₃₂ 15	3 ⁹ / ₃₂ 83	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	1 ¹³ / ₁₆ 46	UK X08	T X08	HE2308 HS2308 H 2308	2.6
UKT X09 X09 X09 X09	1 ⁷ / ₁₆ 1 ¹ / ₂ 15/8	40	1 ¹⁵ / ₁₆ 49	5 ⁸ / ₁₆ 16	1 ¹ / ₂ 38	4 ¹⁹ / ₃₂ 117	4 ¹ / ₆₄ 102	3 ⁹ / ₃₂ 83	5 ⁷ / ₈ 149	3 ¹⁷ / ₃₂ 90	5 ⁸ / ₁₆ 16	3 ³ / ₈ 86	1 ⁹ / ₆₄ 29	3 ⁴ / ₄ 19	1 ¹⁵ / ₁₆ 49	1 ³¹ / ₃₂ 50	UK X09	T X09	HA2309 HE2309 H 2309 HS2309	2.9
UKT X10 X10 X10	1 ¹¹ / ₁₆ 13/4	45	2 ¹⁷ / ₃₂ 64	55 ⁵ / ₆₄ 22	1 ²¹ / ₃₂ 42	5 ³ / ₄ 146	5 ¹ / ₈ 130	4 ¹ / ₃₂ 102	6 ²³ / ₃₂ 171	4 ³ / ₁₆ 106	3 ⁴ / ₄ 19	3 ³ / ₄ 95	1 ³ / ₈ 35	1 25	2 ¹⁷ / ₃₂ 64	2 ⁵ / ₃₂ 55	UK X10	T X10	HA2310 HE2310 H 2310	4.4
UKT X11 X11 X11 X11	1 ⁷ / ₈ 1 ¹⁵ / ₁₆ 2	50	2 ¹⁷ / ₃₂ 64	55 ⁵ / ₆₄ 22	1 ²¹ / ₃₂ 42	5 ³ / ₄ 146	5 ¹ / ₈ 130	4 ¹ / ₃₂ 102	7 ⁵ / ₈ 194	4 ¹¹ / ₁₆ 119	3 ⁴ / ₄ 19	4 ¹ / ₃₂ 102	1 ³ / ₈ 35	1 ¹ / ₄ 32	2 ¹⁷ / ₃₂ 64	2 ⁵ / ₁₆ 59	UK X11	T X11	HS2311 HA2311 H 2311 HE2311	5.1
UKT X12 X12	2 ¹ / ₈	55	2 ³ / ₄ 70	1 ¹ / ₃₂ 26	1 ⁷ / ₈ 48	6 ⁹ / ₁₆ 167	5 ¹⁵ / ₁₆ 151	4 ³ / ₈ 111	8 ¹³ / ₁₆ 224	5 ¹³ / ₃₂ 137	13 ¹ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	2 ⁷ / ₁₆ 62	UK X12	T X12	HS2312 H 2312	7.3
UKT X13 X13 X13 X13	2 ³ / ₁₆ 2 ¹ / ₄ 2 ³ / ₈	60	2 ³ / ₄ 70	1 ¹ / ₃₂ 26	1 ⁷ / ₈ 48	6 ⁹ / ₁₆ 167	5 ¹⁵ / ₁₆ 151	4 ³ / ₈ 111	8 ¹³ / ₁₆ 224	5 ¹³ / ₃₂ 137	13 ¹ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	2 ⁹ / ₁₆ 65	UK X13	T X13	HA2313 HE2313 H 2313 HS2313	7.2
UKT X15 X15 X15 X15	2 ¹ / ₂ 25/8	65	2 ³ / ₄ 70	1 ⁷ / ₆₄ 28	1 ⁷ / ₈ 48	7 ¹ / ₄ 184	6 ¹ / ₂ 165	4 ³ / ₈ 111	9 ¹ / ₄ 235	5 ¹ / ₂ 140	13 ¹ / ₁₆ 21	4 ³ / ₄ 121	1 ³⁹ / ₆₄ 41	1 ¹ / ₄ 32	2 ³ / ₄ 70	2 ⁷ / ₈ 73	UK X15	T X15	HE2315 H 2315 HS2315	8.4
UKT X16 X16	2 ³ / ₄	70	2 ⁷ / ₈ 73	1 ⁷ / ₆₄ 28	2 ¹ / ₈ 54	7 ²⁵ / ₃₂ 198	6 ¹³ / ₁₆ 173	4 ⁷ / ₈ 124	10 ¹ / ₄ 260	6 ³ / ₈ 162	13 ³ / ₃₂ 28	6 ³ / ₁₆ 157	1 ⁵⁷ / ₆₄ 48	1 ¹ / ₂ 38	2 ⁷ / ₈ 73	3 ¹ / ₁₆ 78	UK X16	T X16	HE2316 H 2316	11.8
UKT X17 X17 X17 X17	2 ⁷ / ₈ 2 ¹⁵ / ₁₆ 3	75	2 ⁷ / ₈ 73	1 ⁷ / ₆₄ 28	2 ¹ / ₈ 54	7 ²⁵ / ₃₂ 198	6 ¹³ / ₁₆ 173	4 ⁷ / ₈ 124	10 ¹ / ₄ 260	6 ³ / ₈ 162	13 ³ / ₃₂ 28	6 ³ / ₁₆ 157	1 ⁵⁷ / ₆₄ 48	1 ¹ / ₂ 38	2 ⁷ / ₈ 73	3 ⁷ / ₃₂ 82	UK X17	T X17	HS2317 HA2317 H 2317 HE2317	11.4

테이크-업형 볼베어링 유니트

UKT3

(테이퍼구멍형, 중(重)하중용)



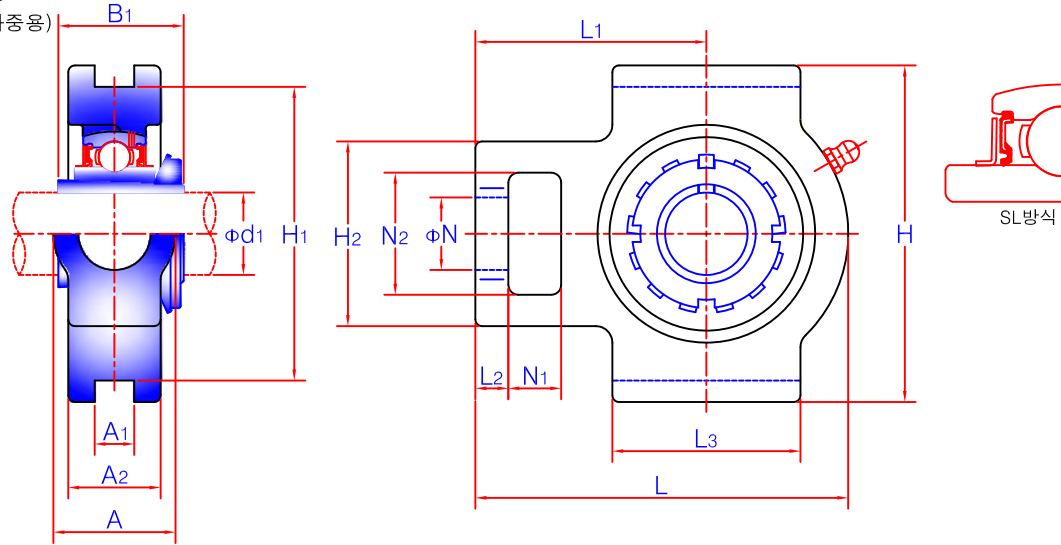


유니트 호칭번호	축지름		주요치수 (in.) (mm)														베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1																			
	(in.)	(mm)	A	A1	A2	H	H1	H2	L	L1	L2	L3	N	N1	N2	B1				
UKT 305 305	3/4	20	1 13/32 36	15/32 12	1 1/32 26	3 1/2 89	35/32 80	2 7/16 62	4 13/16 122	3 76	15/32 12	29/16 65	1 1/32 26	5/8 16	1 13/32 36	1.3780 35	UK 305	T 305	HE2305 H 2305	1.4
UKT 306 306 306	7/8 1	25	1 5/8 41	5/8 16	1 3/32 28	3 15/16 100	3 35/64 90	2 3/4 70	5 13/32 137	3 11/32 85	9/16 14	2 29/32 74	1 7/64 28	23/32 18	1 5/8 41	1.4961 38	UK 306	T 306	HS2306 H 2306 HE2306	1.8
UKT 307 307 307	1 1/8 1 3/8 1 7/16	35	1 25/32 45	5/8 16	1 1/4 32	4 3/8 111	3 15/16 100	2 15/16 75	5 29/32 150	3 11/16 94	19/32 15	3 5/32 80	1 3/16 30	25/32 20	1 25/32 45	1.6929 43	UK 307	T 307	HS2307 H 2307 HA2307	2.3
UKT 308 308 308	1 1/4 1 3/8	35	1 31/32 50	45/64 18	1 11/32 34	4 7/8 124	4 13/32 112	3 9/32 83	6 3/8 162	3 15/16 100	21/32 17	3 1/2 89	1 17/64 32	7/8 22	1 31/32 50	1.8110 46	UK 308	T 308	HE2308 HS2308 H 2308	3.0
UKT 309 309 309	1 1/2 1 5/8	40	2 5/32 55	45/64 18	1 1/2 38	5 7/16 138	4 59/64 125	3 17/32 90	7 178	4 11/32 110	23/32 18	3 13/16 97	1 11/31 34	15/16 24	2 5/32 55	1.9685 50	UK 309	T 309	HE2309 H 2309 HS2309	4.1
UKT 310 310 310	1 11/16 1 3/4	45	2 13/32 61	25/32 20	1 9/16 40	5 15/16 151	5 33/64 140	3 27/32 98	7 17/32 191	4 19/32 117	25/32 20	4 3/16 106	1 29/64 37	1 1/16 27	2 13/32 61	2.1654 55	UK 310	T 310	HA2310 HE2310 H 2310	4.9
UKT 311 311 311	1 7/8 2	50	2 19/32 66	55/64 22	1 23/32 44	6 13/32 163	5 29/32 150	4 1/8 105	8 5/32 207	5 127	13/16 21	4 17/32 115	1 17/32 39	1 5/32 29	2 19/32 66	2.3228 59	UK 311	T 311	HS2311 H 2311 HE2311	6.1
UKT 312 312	2 1/8	55	2 25/32 71	55/64 22	1 13/16 46	7 178	6 19/64 160	4 7/16 113	8 21/32 220	5 5/16 135	29/32 23	4 27/32 123	1 39/64 41	1 7/32 31	2 25/32 71	2.4409 62	UK 312	T 312	HS2312 H 2312	7.6
UKT 313 313 313	2 1/4 2 3/8	60	3 5/32 80	1 1/32 26	1 31/32 50	7 15/32 190	6 11/16 170	4 9/16 116	9 3/8 238	5 3/4 146	1 25	5 9/32 134	1 11/16 43	1 1/4 32	2 25/32 71	2.5591 65	UK 313	T 313	HE2313 H 2313 HS2313	9.3
UKT 315 315	2 1/2	65	3 17/32 90	1 1/32 26	2 5/32 55	8 1/2 216	7 9/16 192	5 3/16 132	10 5/16 262	6 5/16 160	1 25	5 29/32 150	1 13/16 46	1 13/32 36	3 11/32 85	2.8740 73	UK 315	T 315	HE2315 H 2315	13
UKT 316 316 316	2 3/4	70	4 1/32 102	1 3/16 30	2 3/8 60	9 1/16 230	8 1/32 204	5 29/32 150	11 3/32 282	6 27/32 174	1 3/32 28	6 5/16 160	2 3/32 53	1 21/32 42	3 27/32 98	3.0709 78	UK 316	T 316	HE2316 H 2316	16.2
UKT 317 317	3	75	4 1/32 102	1 17/64 32	2 17/32 64	9 7/16 240	8 27/64 214	5 31/32 152	11 23/32 298	7 7/32 183	1 3/16 30	6 11/16 170	2 3/32 53	1 21/32 42	3 27/32 98	3.2283 82	UK 317	T 317	H 2317 HE2317	19
UKT 318		80	4 11/32 110	1 17/64 32	2 19/32 66	10 1/32 255	8 31/32 228	6 5/16 160	12 9/32 312	7 9/16 192	1 3/16 30	6 7/8 175	2 1/4 57	1 13/16 46	4 3/16 106	3.3858 86	UK 318	T 318	H 2318	21.6
UKT 319 319	3 1/4	85	4 11/32 110	1 3/8 35	2 27/32 72	10 5/8 270	9 29/64 240	6 1/2 165	12 11/16 322	7 3/4 197	1 7/32 31	7 3/32 180	2 1/4 57	1 13/16 46	4 3/16 106	3.5433 90	UK 319	T 319	HE2319 H 2319	24.9
UKT 320 320	3 1/2	90	4 23/32 120	1 3/8 35	2 15/16 75	11 13/32 290	10 15/64 260	6 7/8 175	13 19/32 345	8 9/32 210	1 1/4 32	7 7/8 200	2 21/64 59	1 7/8 48	4 17/32 115	3.8189 97	UK 320	T 320	HE2320 H 2320	30.7
UKT 322 322	4	100	5 1/8 130	1 1/2 38	3 5/32 80	12 19/32 320	11 7/32 285	7 9/32 185	15 5/32 385	9 1/4 235	1 1/2 38	8 15/32 215	2 29/16 65	2 1/16 52	4 29/32 125	4.1339 105	UK 322	T 322	H 2322 HE2322	39.7
UKT 324 324	4 7/16	110	5 1/2 140	1 49/64 45	3 17/32 90	13 31/32 355	12 19/32 320	8 9/32 210	17 432	10 1/2 267	1 21/32 42	9 1/16 230	2 3/4 70	2 3/8 60	5 1/2 140	4.4094 112	UK 324	T 324	H 2324 HA2324	54.4
UKT 326 326	4 1/2	115	5 29/32 150	1 31/32 50	3 15/16 100	15 5/32 385	13 25/32 350	8 21/32 220	18 5/16 465	11 7/32 285	1 25/32 45	9 7/16 240	2 29/16 75	2 29/16 65	5 29/32 150	4.7638 121	UK 326	T 326	HE2326 H 2326	69.3
UKT 328 328	4 15/16	125	6 3/32 155	1 31/32 50	3 15/16 100	16 11/32 415	14 61/64 380	9 1/16 230	20 9/32 515	12 13/32 315	1 31/32 50	10 1/32 255	3 5/32 80	2 3/4 70	6 5/16 160	5.1575 131	UK 328	T 328	H 2328 HA2328	85.1

카트릿지형 볼베어링 유니트

UKC2

(테이퍼구멍형, 경(輕)하중용)



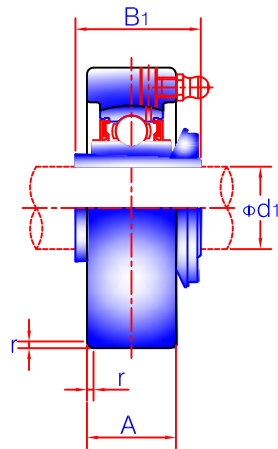


유니트 호칭번호	축지름 d1		주요치수 (in.) (mm)				베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	(in.)	(mm)	H	A	r	B1				
UKC 205 205	3/4	20	3.1496 80	55/64 22	1.5	13/8 35	UK 205	C 205	HE 2305 H 2305	0.68
UKC 206 206 206 206	7/8 15/16 1	25	3.3465 85	11/16 27	1.5	11/2 38	UK 206	C 206	HS 2306 HA 2306 H 2306 HE 2306	0.85
UKC 207 207 207	11/8 13/16	30	3.5433 90	17/64 28	2	111/16 43	UK 207	C 207	HS 2307 H 2307 HA 2307	0.97
UKC 208 208 208	11/4 13/8	35	3.9370 100	17/64 28	2	113/16 46	UK 208	C 208	HE 2308 HS 2308 H 2308	1.3
UKC 209 209 209 209	17/16 11/2 15/8	40	4.3307 110	17/32 31	2	131/32 50	UK 209	C 209	HA 2309 HE 2309 H 2309 HS 2309	1.6
UKC 210 210 210	111/16 13/4	45	4.7244 120	119/64 33	2	25/32 55	UK 210	C 210	HA 2310 HE 2310 H 2310	2.0
UKC 211 211 211 211	17/8 115/16 2	50	4.9213 125	13/8 35	2.5	25/16 59	UK 211	C 211	HS 2311 HA 2311 H 2311 HE 2311	2.3
UKC 212 212	21/8	55	5.1181 130	11/2 38	2.5	27/16 62	UK 212	C 212	HS 2312 H 2312	2.5
UKC 213 213 213 213	23/16 21/4 23/8	60	5.5118 140	137/64 40	2.5	29/16 65	UK 213	C 213	HA 2313 HE 2313 H 2313 HS 2313	3.0

카트릿지형 볼베어링 유닛

UKCX

(테이퍼구멍형, 중(中)하중용)



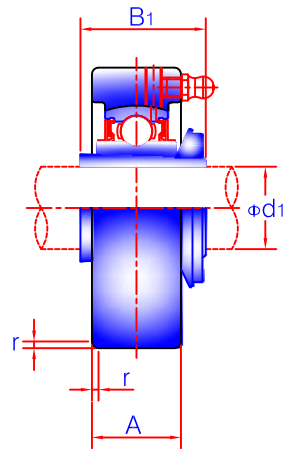


유 니 트 호칭번호	축 지 름		주 요 치 수 (in.) (mm)				베 어 링 호칭번호	하우징 호칭번호	적 용 어댑터	중량 (kgf)
	d1									
	(in.)	(mm)	H	A	r	B ₁				
UKC X05 X05	3/4	20	3.5433 90	1 ₁₆ ¹ 27	1.5	1 ₈ ³ 35	UK X05	C X05	HE 2305 H 2305	0.99
UKC X06 X06 X06 X06	7/8 15/16 1	25	3.9370 100	1 ₁₆ ³ 30	2	1 ₂ ¹ 38	UK X06	C X06	HS 2306 HA 2306 H 2306 HE 2306	1.3
UKC X07 X07 X07	1 ₈ ¹ 1 ₁₆ ³	30	4.3307 110	1 ₃₂ ¹¹ 34	2	1 ₁₆ ¹¹ 43	UK X07	C X07	HS 2307 H 2307 HA 2307	1.7
UKC X08 X08 X08	1 ₄ ¹ 1 ₈ ³	35	4.7244 120	1 ₂ ¹ 38	2	1 ₁₆ ¹³ 46	UK X08	C X08	HE 2308 HS 2308 H 2308	2.3
UKC X09 X09 X09 X09	1 ₁₆ ⁷ 1 ₂ ¹ 1 ₈ ⁵	40	4.7244 120	1 ₂ ¹ 38	2	1 ₃₂ ³¹ 50	UK X09	C X09	HA 2309 HE 2309 H 2309 HS 2309	2.3
UKC X10 X10 X10	1 ₁₆ ¹¹ 1 ₄ ³	45	5.1181 130	1 ₆₄ ³⁷ 40	2.5	2 ₃₂ ⁵ 55	UK X10	C X10	HA 2310 HE 2310 H 2310	2.8
UKC X11 X11 X11 X11	1 ₈ ⁷ 1 ₁₆ ¹⁵ 2	50	5.9055 150	1 ₃₂ ²¹ 42	2.5	2 ₁₆ ⁵ 59	UK X11	C X11	HS 2311 HA 2311 H 2311 HE 2311	3.8
UKC X12 X12	2 ₈ ¹	55	6.2992 160	1 ₆₄ ⁴⁷ 44	2.5	2 ₁₆ ⁷ 62	UK X12	C X12	HS 2312 H 2312	4.4

카트릿지형 볼베어링 유니트

UKC3

(테이퍼구멍형, 중(重)하중용)

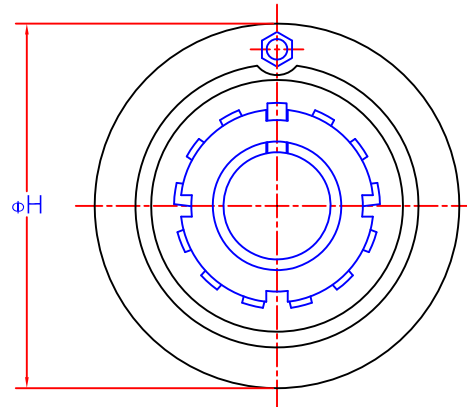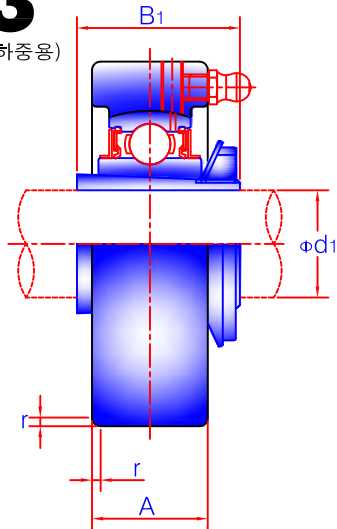


유니트 호칭번호	축지름		주요치수 (in./mm)				베어링 호칭번호	하우징 호칭번호	적용 어댑터	중량 (kgf)
	d1 (in.)	(mm)	H	A	r	B1				
UKC 305 305	3/4	20	3.5433 90	1 1/32 26	2	1.3780 35	UK 305	C 305	HE 2305 H 2305	1.5
UKC 306 306 306	7/8 1	25	3.9370 100	1 7/64 28	2	1.4961 38	UK 306	C 306	HS 2306 H 2306 HE 2306	1.7
UKC 307 307 307	1 1/4 1 3/8 1 7/16	30	4.3307 110	1 17/64 32	3	1.6929 43	UK 307	C 307	HS 2307 H 2307 HA 2307	2.2
UKC 308 308 308	1 1/4 1 3/8	35	4.7244 120	1 11/32 34	3	1.8110 46	UK 308	C 308	HE 2308 HS 2308 H 2308	2.2
UKC 309 309 309	1 1/2 1 5/8	40	5.1181 130	1 1/2 38	3	1.9685 50	UK 309	C 309	HE 2309 H 2309 HS 2309	2.8
UKC 310 310 310	1 11/16 1 3/4	45	5.5118 140	1 37/64 40	3	2.1654 55	UK 310	C 310	HA 2310 HE 2310 H 2310	3.2
UKC 311 311 311	1 7/8 2	50	5.9055 150	1 47/64 44	3	2.3228 59	UK 311	C 311	HS 2311 H 2311 HE 2311	3.9
UKC 312 312 312	2 1/8	55	6.2992 160	1 13/16 46	3	2.4409 62	UK 312	C 312	HS 2312 H 2312	4.8
UKC 313 313 313	2 1/4 2 3/8	60	6.6929 170	1 31/32 50	3	2.5591 65	UK 313	C 313	HE 2313 H 2313 HS 2313	5.7
UKC 315 315 315	2 1/2	65	7.4803 190	2 11/64 55	4	2.8740 73	UK 315	C 315	HE 2315 H 2315	7.8
UKC 316 316 316	2 3/4	70	7.8740 200	2 23/64 60	4	3.0709 78	UK 316	C 316	HE 2316 H 2316	9.2
UKC 317 317 317	3	75	8.4646 215	2 33/64 64	4	3.2283 82	UK 317	C 317	H 2317 HE 2317	11.7
UKC 318		80	8.8583 225	2 19/32 66	4	3.3858 86	UK 318	C 318	H 2318	13.1
UKC 319 319 319	3 1/4	85	9.4488 240	2 53/64 72	4	3.5433 90	UK 319	C 319	HE 2319 H 2319	15.8
UKC 320 320 320	3 1/2	90	10.2362 260	2 61/64 75	4	3.8189 97	UK 320	C 320	HE 2320 H 2320	19.6
UKC 322 322 322	4	100	11.8110 300	3 5/32 80	5	4.1339 105	UK 322	C 322	H 2322 HE 2322	29.2
UKC 324 324 324	4 7/16	110	12.5984 320	3 35/64 90	5	4.4094 112	UK 324	C 324	H 2324 HA 2324	35.9
UKC 326 326 326	4 1/2	115	13.3858 340	3 15/16 100	6	4.7638 121	UK 326	C 326	HE 2326 H 2326	43.0
UKC 328 328 328	4 15/16	125	14.1732 360	3 15/16 100	6	5.1575 131	UK 328	C 328	H 2328 HA 2328	52.9

필로우형 볼베어링 유니트

HCP2

(원통구멍형, 경(輕)하중용)

(편심칼라체결 방식)

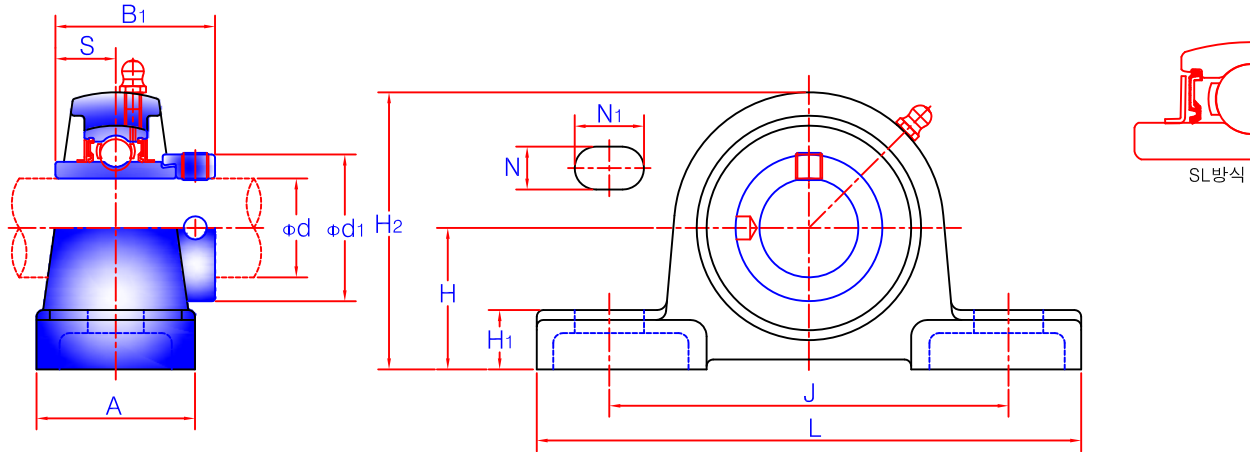


유니트 호칭번호	축지름 d		주요치수 (in.) (mm)											설치볼트 호칭번호		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	H	L	A	J	N	N ₁	H ₁	H ₂	B ₁	S	d ₁	(mm)	(in.)			
HCP 201 201-8 202 202-10 203	1/2 5/8	12 15 17	1 3/16 30.2	5 127	1 13/32 36	3 3/4 95	1 1/2 13	3/4 19	1 1/2 13	2 3/8 60	1.7204 43.7	0.6732 17.1	1.3110 33.3	10	3/8	HC 201 201-8 202 202-10 203	P 203	0.71 0.69 0.68
HCP 204-12 204	3/4	20	1 5/16 33.3	5 127	1 1/2 38	3 3/4 95	1 1/2 13	3/4 19	35/64 14	2 9/16 65	1.7204 43.7	0.6732 17.1	1.3110 33.3	10	3/8	HC 204-12 204	P 204	0.73
HCP 205-14 205-15 205 205-16	7/8 15/16 1	25	1 7/16 36.5	5 1/2 140	1 1/2 38	4 1/8 105	1 1/2 13	3/4 19	19/32 15	2 25/32 71	1.7480 44.4	0.6890 17.5	1.5000 38.1	10	3/8	HC 205-14 205-15 205 205-16	P 205	0.87
HCP 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4	30	1 11/16 42.9	6 1/2 165	1 7/8 48	4 3/4 121	2 1/32 17	13/16 21	2 1/32 17	3 9/32 83	1.9055 48.4	0.7204 18.3	1.7520 44.5	14	1/2	HC 206-18 206 206-19 206-20	P 206	1.4
HCP 207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	1 7/8 47.6	6 9/16 167	1 7/8 48	5 127	2 1/32 17	13/16 21	45/64 18	3 21/32 93	2.0118 51.1	0.7402 18.8	2.1890 55.6	14	1/2	HC 207-20 207-22 207 207-23	P 207	1.8
HCP 208-24 208	1 1/2	40	1 15/16 49.2	7 1/4 184	2 1/8 54	5 13/32 137	2 1/32 17	13/16 21	45/64 18	3 27/32 98	2.2165 56.3	0.8425 21.4	2.3740 60.3	14	1/2	HC 208-24 208	P 208	2.1
HCP 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	2 1/8 54.0	7 15/32 190	2 1/8 54	5 3/4 146	2 1/32 17	13/16 21	25/32 20	4 3/16 106	2.2165 56.3	0.8425 21.4	2.5000 63.5	14	1/2	HC 209-26 209-27 209-28 209	P 209	2.4
HCP 210-31 210 210-32	1 15/16 2	50	2 1/4 57.2	8 1/8 206	2 3/8 60	6 1/4 159	2 5/32 20	1 25	13/16 21	4 1/2 114	2.4685 62.7	0.9685 24.6	2.7520 69.9	16	5/8	HC 210-31 210 210-32	P 210	3.1
HCP 211-32 211 211-35	2 2 3/16	55	2 1/2 63.5	8 5/8 219	2 3/8 60	6 23/32 171	2 5/32 20	1 25	29/32 23	4 31/32 126	2.8110 71.4	1.0945 27.8	3.0000 76.2	16	5/8	HC 211-32 211 211-35	P 211	3.9
HCP 212-36 212 212-39	2 1/4 2 7/16	60	2 3/4 69.8	9 1/2 241	2 3/4 70	7 1/4 184	2 5/32 20	1 25	1 25	5 7/16 138	3.0630 77.8	1.2204 31.0	3.3150 84.2	16	5/8	HC 212-36 212 212-39	P 212	5.2
HCP 213-40 213	2 1/2	65	3 76.2	10 25/64 264	2 3/4 70	8 203	1 25	13/16 30	1 1/16 27	5 15/16 151	3.3740 85.7	1.3425 34.1	3.3858 86	20	3/4	HC 213-40 213	P 213	6.5
HCP 214-44 214	2 3/4	70	3 1/8 79.4	10 1/2 266	2 27/32 72	8 9/32 210	1 25	13/16 30	1 1/16 27	6 3/16 157	3.3740 85.7	1.3425 34.1	3.5433 90	20	3/4	HC 214-44 214	P 214	7.26
HCP 215-47 215	2 15/16	75	3 1/4 82.6	10 13/16 275	2 29/32 74	8 17/32 217	1 25	13/16 30	1 3/32 28	6 13/32 163	3.6260 92.1	1.4685 37.3	4.0157 102	20	3/4	HC 215-47 215	P 215	7.9

마개이음볼이 등근플랜지형 볼베어링 유닛

HCFCC2

(원통구멍형, 경(輕)하중용)

(편심캠라체결방식)

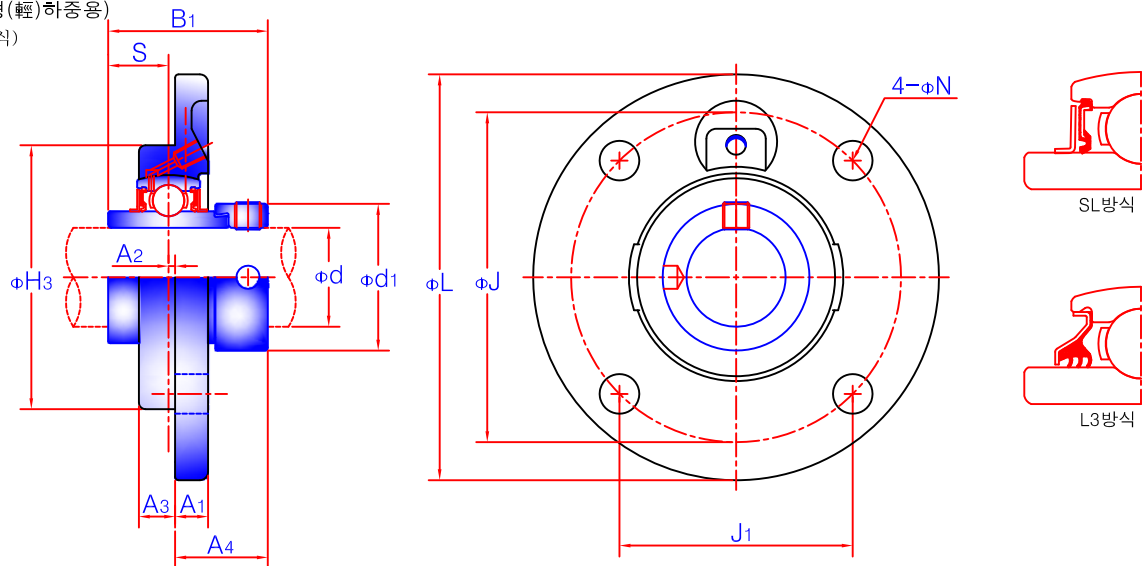


유 니 트 호칭번호	축 지 림		주 요 치 수 (in./mm)												설치볼트 호 칭		베 어 링 호칭번호	하우징 호칭번호	중량 (kgf)
	d		L	H ₃	J	J ₁	N	A ₁	A ₂	A ₃	A ₄	B ₁	S	d ₁	(mm)	(In.)			
HCFCC 201-8 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20	3 _{15/16} 27 ₁₆ 100	27 ₁₆ 62 78	3 ₁₁₆ 21 ₁₆₄ 55.2	23 ₆₄ 9	5 ₁₆ 8	5 ₆₄ 2	23 ₆₄ 9	31 ₃₂ 24.6	1.7205 43.7	0.6732 17.1	1.3110 33.3	8	5/16	HC 201-8 202-10 203 204-12 204	FCC 204	0.63	
HCFCC 205-14 205-15 205 205-16	7/8 15/16 1	25	4 ₁₇₃₂ 23 ₄ 115	3 ₃₅₆₄ 70 90	2 ₁₂ 63.6	23 ₆₄ 9	23 ₆₄ 9	3 ₃₂ 2.5	13 ₃₂ 10	31 ₃₂ 24.4	1.7480 44.4	0.6890 17.5	1.5000 38.1	8	5/16	HC 205-14 205-15 205 205-16	FCC 205	0.83	
HCFCC 206-18 206 206-19	1 1/8 1 3/16	30	4 ₂₇₃₂ 35 ₃₂ 123	3 ₁₅₁₆ 80 100	2 ₂₅₃₂ 70.7	15 ₃₂ 12	13 ₃₂ 10	1 ₈ 3	7 ₁₆ 11	1 ₅₆₄ 27.1	1.9055 48.4	0.7205 18.3	1.7520 44.5	10	3/8	HC 206-18 206 206-19	FCC 206	1.06	
HCFCC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	5 ₅₁₆ 3 ₃₅₆₄ 135	4 ₁₁₃₂ 31 ₁₆ 90	31 ₁₆ 77.8	29 ₆₄ 11.5	13 ₃₂ 10	3 ₆₄ 1	13 ₃₂ 10.5	1 ₁₅₆₄ 31.3	2.0118 51.1	0.7402 18.8	2.1890 55.6	10	3/8	HC 207-20 207-21 207-22 207 207-23	FCC 207	1.36	
HCFCC 208-24 208-25 208	1 1/2 1 9/16	40	5 ₂₃₃₂ 3 ₁₅₁₆ 145	4 ₂₃₃₂ 100 120	3 ₁₁₃₂ 84.9	29 ₆₄ 11.5	29 ₆₄ 11.5	1 ₁₆ 1.5	31 ₆₄ 12.5	1 ₅₁₆ 33.4	2.2165 56.3	0.8425 21.4	2.3740 60.3	10	3/8	HC 208-24 208-25 208	FCC 208	1.82	
HCFCC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	6 ₃₃₂ 4 ₁₈ 155	5 ₁₈ 130	3 ₃₉₆₄ 91.9	35 ₆₄ 14	15 ₃₂ 12	5 ₆₄ 2	1 ₂ 13	1 ₁₉₆₄ 32.9	2.2165 56.3	0.8425 21.4	2.5000 63.5	12	7/16	HC 209-26 209-27 209-28 209	FCC 209	2.28	
HCFCC 210-30 210-31 210	1 7/8 1 5/16	50	6 ₁₂ 4 ₁₁₃₂ 165	5 ₅₁₆ 135	3 ₄₉₆₄ 95.5	35 ₆₄ 14	1 ₂ 13	3 ₆₄ 1	15 ₃₂ 12	1 ₁₅₃₂ 37.1	2.4685 62.7	0.9685 24.6	2.7520 69.9	12	7/16	HC 210-30 210-31 210	FCC 210	2.44	
HCFCC 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	7 ₉₃₂ 4 ₂₉₃₂ 185	5 ₂₉₃₂ 150	4 ₁₁₆₄ 106	45 ₆₄ 18	19 ₃₂ 15	0 0	31 ₆₄ 12.5	1 ₂₃₃₂ 43.6	2.8110 71.4	1.0945 27.8	3.0000 76.2	16	5/8	HC 211-32 211-34 211 211-35	FCC 211	3.50	
HCFCC 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	7 ₁₁₁₆ 5 ₅₁₆ 195	6 ₅₁₆ 135 160	4 ₂₉₆₄ 113.1	45 ₆₄ 18	5 ₈ 16	-1/2 -0.5	1 ₂ 13	1 ₅₅₆₄ 47.3	3.0630 77.8	1.2205 31	3.3150 84.2	16	5/8	HC 212-36 212 212-38 212-39	FCC 212	4.32	

경량 필로우형 볼베어링 유니트

SALP2 SBLP2

(원통구멍형, 경(輕)하중용)

SALP2(편심칼라체결), SBLP2(멈춤나사체결)

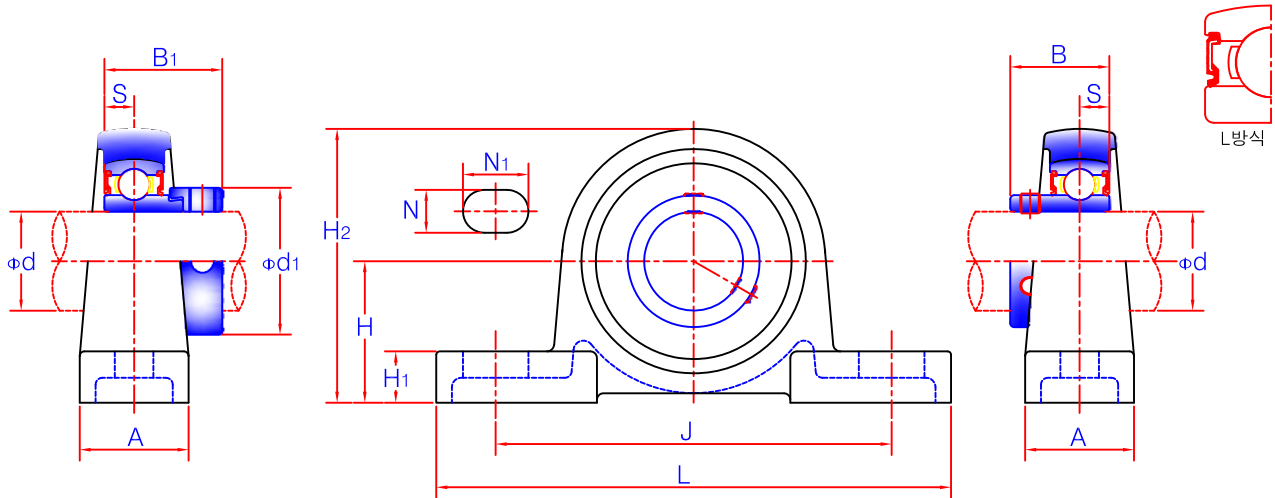


유니트 호칭번호	축지름		주요치수 ^(in.) (mm)									설치 볼트 호칭 (in.)	S A L P				S B L P			하우징 호칭번호
	d		H	L	A	J	N	N ₁	H ₁	H ₂	S		B ₁	d ₁	베어링 호칭번호	중량 (kgf)	B	베어링 호칭번호	중량 (kgf)	
SALP 201 SBLP 201-8 202 202-10 203	1/2 5/8	12 15 17	1 3/16 30.2	4 31/64 114	1 25.4	3 7/16 87	7/16 11	5/8 16	15/32 12	2 1/4 57	0.2560 6.5	3/8	1.1260 28.6	1.1260 28.6	SA 201 201-8 202 202-10 203	0.39	0.8858 22.5	SB 201 201-8 202 202-10 203	0.36	LP 203
SALP 204-12 SBLP 204	3/4	20	1 5/16 33.3	4 59/64 125	1 1/16 27	3 13/16 97	7/16 11	5/8 16	1 1/2 12.7	2 9/16 65	0.2953 7.5	3/8	1.2204 31.0	1.3110 33.3	SA 204-12 204	0.51	1.0039 25.5	SB 204-12 204	0.51	LP 204
SALP 205-14 SBLP 205 205-16	7/8 1	25	1 7/16 36.5	5 1/8 130	1 9/64 29	3 15/16 100	7/16 11	5/8 16	1 1/2 12.7	2 3/4 70	0.2953 7.5	3/8	1.2204 31.0	1.5000 38.1	SA 205-14 205 205-16	0.61	1.0630 27.0	SB 205-14 205 205-16	0.57	LP 205
SALP 206-18 SBLP 206 206-19 SALP 206-20	1 1/8 1 3/16 1 1/4	30	1 11/16 42.9	6 9/64 156	1 19/64 33	4 47/64 120	35/64 14	13/16 21	19/32 15	3 9/32 83	0.3543 9.0	1/2	1.4055 35.7	2.7520 44.5	SA 206-18 206 206-19 206-20	0.72	1.1811 30.0	SB 206-18 206 206-19	0.69	LP 206
SALP 207-20 SBLP 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	1 7/8 47.6	6 1/2 165	1 3/8 35	5 127	35/64 14	13/16 21	5/8 16	3 5/8 92	0.3740 9.5	1/2	1.5315 38.9	2.1890 55.6	SA 207-20 207-22 207 207-23	1.02	1.3780 35.0	SB 207-20 207-22 207 207-23	0.94	LP 207
SALP 208-24 SBLP 208	1 1/2	40	2 50.8	7 1/4 184	1 29/64 37	5 33/64 140	35/64 14	7/8 22	45/64 18	4 1/32 102	0.4331 11	1/2	1.7205 43.7	2.3740 60.3	SA 208-24 208	1.87	1.5748 40.0	SB 208-24 208	1.80	LP 208

마개이음볼이 등근플랜지형 볼베어링 유닛

SAFCC2

(원통구멍형, 경(輕)하중용)

(편심캠라체결방식)

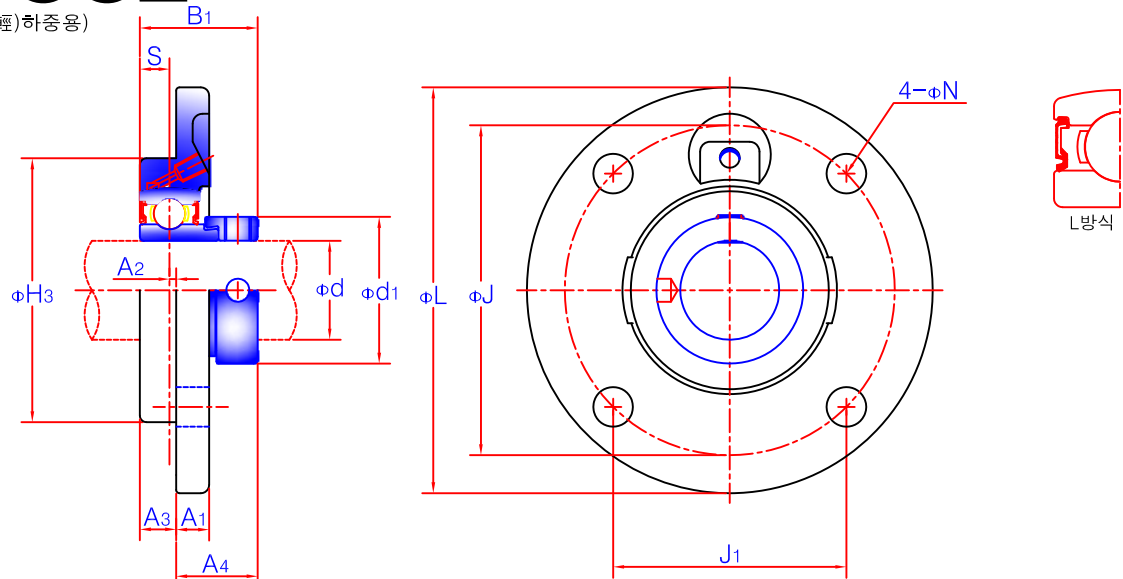


유닛 호칭번호	축지름 d		주요치수 (in./mm)												설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	(in.)	(mm)	L	H3	J	J1	N	A1	A2	A3	A4	B1	S	d1	(mm)	(in.)	호칭번호	호칭번호	(kgf)
SAFCC 201		12															SA 201		
201-8	1/2	15															201-8		
202		15	315/16	27/16	31/16	211/64	23/64	5/16	5/64	23/64	27/32	1.2205	0.2953	1.3110	8	5/16	202	FCC 204	0.53
202-10	5/8	17	100	62	78	55.2	9	8	2	9	21.5	31.0	7.5	33.3			202-10		
203		17															203		
204-12	3/4	20															204-12		
204		20															204		
SAFCC 205-14	7/8																SA 205-14		
205-15	15/16	25	417/32	23/4	335/64	21/2	23/64	23/64	3/32	13/32	53/64	1.2205	0.2953	1.5000	8	5/16	205-15	FCC 205	0.80
205		25	115	70	90	63.6	9	9	2.5	10	21	31.0	7.5	38.1			205		
205-16	1																205-16		
SAFCC 206-18	1 1/8																SA 206-18		
206		30	427/32	35/32	315/16	225/32	15/32	13/32	1/8	7/16	15/16	1.4055	0.3543	1.7520	10	3/8	206	FCC 206	0.95
206-19	1 3/16		123	80	100	70.7	12	10	3	11	23.7	35.7	9.0	44.5			206-19		
SAFCC 207-20	1 1/4																SA 207-20		
207-21	1 5/16																207-21		
207-22	1 3/8	35	55/16	335/64	411/32	31/16	29/64	13/32	3/64	13/32	11/8	1.5315	0.3740	2.1890	10	3/8	207-22	FCC 207	1.25
207		35	135	90	110	77.8	11.5	10	1	10.5	28.4	38.9	9.5	55.6			207		
207-23	1 7/16																207-23		
SAFCC 208-24	1 1/2																SA 208-24		
208-25	1 9/16	40	523/32	315/16	423/32	311/32	29/64	29/64	1/16	31/64	115/64	1.7205	0.4331	2.3740	10	3/8	208-25	FCC 208	1.68
208		40	145	100	120	84.9	11.5	11.5	1.5	12.5	31.2	43.7	11	60.3			208		
SAFCC 209-26	1 5/8																SA 209-26		
209-27	1 11/16																209-27		
209-28	1 3/4	45	63/32	41/8	51/8	339/64	35/64	15/32	5/64	1/2	19/16	2.0787	0.4331	2.5000	12	7/16	209-28	FCC 209	2.05
209		45	155	105	130	91.9	14	12	2	13	39.8	52.8	11	63.5			209		
SAFCC 210-30	1 7/8																SA 210-30		
210-31	1 5/16																210-31		
210		50	61/2	411/32	55/16	349/64	35/64	1/2	3/64	15/32	153/64	2.2992	0.4331	2.7520	12	7/16	210	FCC 210	2.19
		50	165	110	135	95.5	14	13	1	12	46.4	58.4	11	69.9					
SAFCC 211-32	2																SA 211-32		
211-34	2 1/8																211-34		
211		55	79/32	429/32	529/32	411/64	45/64	19/32	0	31/64	13/32	2.5709	0.4724	3.0000	16	5/8	211	FCC 211	3.14
211-35	2 3/16		185	125	150	106	18	15	0	12.5	53.3	65.3	12	76.2			211-35		
SAFCC 212-36	2 1/4																SA 212-36		
212		60	711/16	55/16	65/16	429/64	45/64	5/8	-1/2	1/2	121/64	2.8465	0.5315	3.3150	16	5/8	212	FCC 212	3.83
212-38	2 3/8		195	135	160	113.1	18	16	-0.5	13	59.3	72.3	13.5	84.2			212-38		
212-39	2 7/16																212-39		

마개이음볼이 등근플랜지형 볼베어링 유니트

SBFCC2

(원통구멍형, 경(輕)하중용)

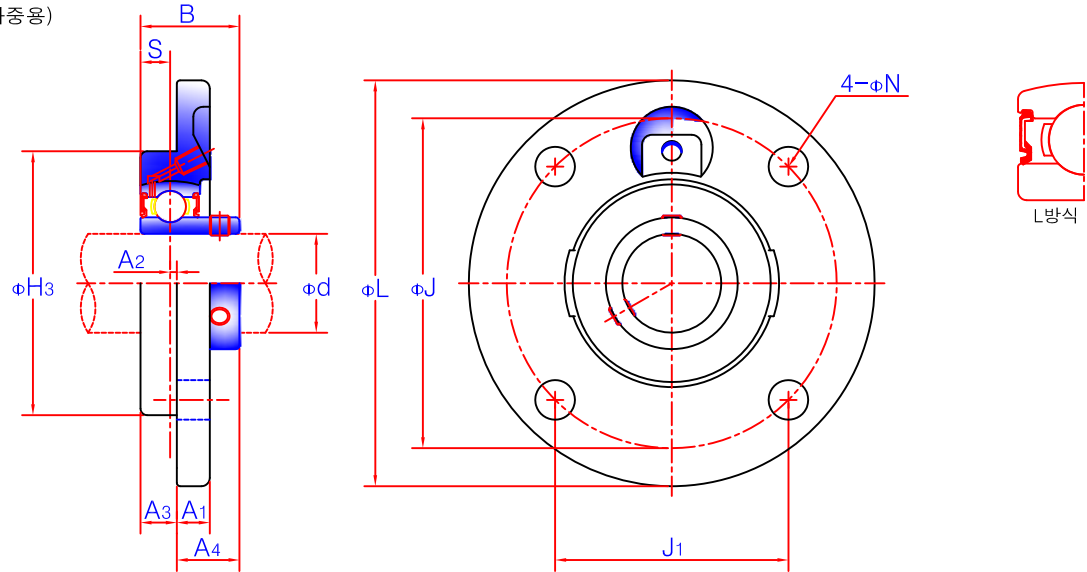


유니트 호칭번호	축지름		주요치수 (in./mm)											설치볼트 호칭		베어링 호칭번호	하우징 호칭번호	중량 (kgf)
	d															호칭번호	호칭번호	(kgf)
	(in.)	(mm)	L	H3	J	J1	N	A1	A2	A3	A4	B	S	(mm)	(in.)			
SBFCC 201-8 202 202-10 203 204-12 204	1/2 5/8 3/4	12 15 17 20	315/16 100	27/16 62	31/16 78	211/64 55.2	23/64 9	5/16 8	5/64 2	23/64 9	41/64 16.3	1.0040 25.5	0.2953 7.5	8 5/16		SB 201-8 202 202-10 203 204-12 204	FCC 204	0.53
SBFCC 205-14 205-15 205 205-16	7/8 15/16 1	25	417/32 115	23/4 70	335/64 90	21/2 63.6	23/64 9	23/64 9	3/32 2.5	13/32 10	11/16 17.3	1.0630 27.0	0.2953 7.5	8 5/16		SB 205-14 205-15 205 205-16	FCC 205	0.74
SBFCC 206-18 206 206-19	1 1/8 1 3/16	30	427/32 123	35/32 80	315/16 100	225/32 70.7	15/32 12	13/32 10	1/8 3	7/16 11	3/4 19.2	1.1811 30.0	0.3543 9.0	10 3/8		SB 206-18 206 206-19	FCC 206	0.92
SBFCC 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	55/16 135	335/64 90	411/32 110	31/16 77.8	29/64 11.5	13/32 10	3/64 1	13/32 10.5	61/64 24.4	1.3780 35.0	0.3740 9.5	10 3/8		SB 207-20 207-21 207-22 207 207-23	FCC 207	1.12
SBFCC 208-24 208-25 208	1 1/2 1 9/16	40	523/32 145	315/16 100	423/32 120	311/32 84.9	29/64 11.5	29/64 11.5	1/16 1.5	31/64 12.5	11/8 28.7	1.5748 40.0	0.4331 11	10 3/8		SB 208-24 208-25 208	FCC 208	1.57
SBFCC 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	63/32 155	41/8 105	51/8 130	339/64 91.9	35/64 14	15/32 12	5/64 2	1/2 13	17/64 28.2	1.6220 41.2	0.4331 11	12 7/16		SB 209-26 209-27 209-28 209	FCC 209	1.96
SBFCC 210-30 210-31 210	1 7/8 1 15/16	50	61/2 165	411/32 110	55/16 135	349/64 95.5	35/64 14	1/2 13	3/64 1	15/32 12	115/64 31.6	1.7165 43.6	0.4331 11	12 7/16		SB 210-30 210-31 210	FCC 210	2.74
SBFCC 211-32 211-34 211 211-35	2 2 1/8 2 3/16	55	79/32 185	429/32 125	529/32 150	411/64 106	45/64 18	19/32 15	0 0	31/64 12.5	15/16 33.4	1.7874 45.4	0.4724 12	16 5/8		SB 211-32 211-34 211 211-35	FCC 211	3.09
SBFCC 212-36 212 212-38 212-39	2 1/4 2 3/8 2 7/16	60	711/16 195	55/16 135	65/16 160	429/64 113.1	45/64 18	5/8 16	-1/2 -0.5	1/2 13	137/64 40.2	2.0945 53.2	0.5315 13.5	16 5/8		SB 212-36 212 212-38 212-39	FCC 212	3.68

경량 마름모 플랜지형 볼베어링 유닛

SALF2 SBLF2

(원통구멍형, 경(輕)하중용)

SALF2(편심칼라체결), SBLF2(멈춤나사체결)

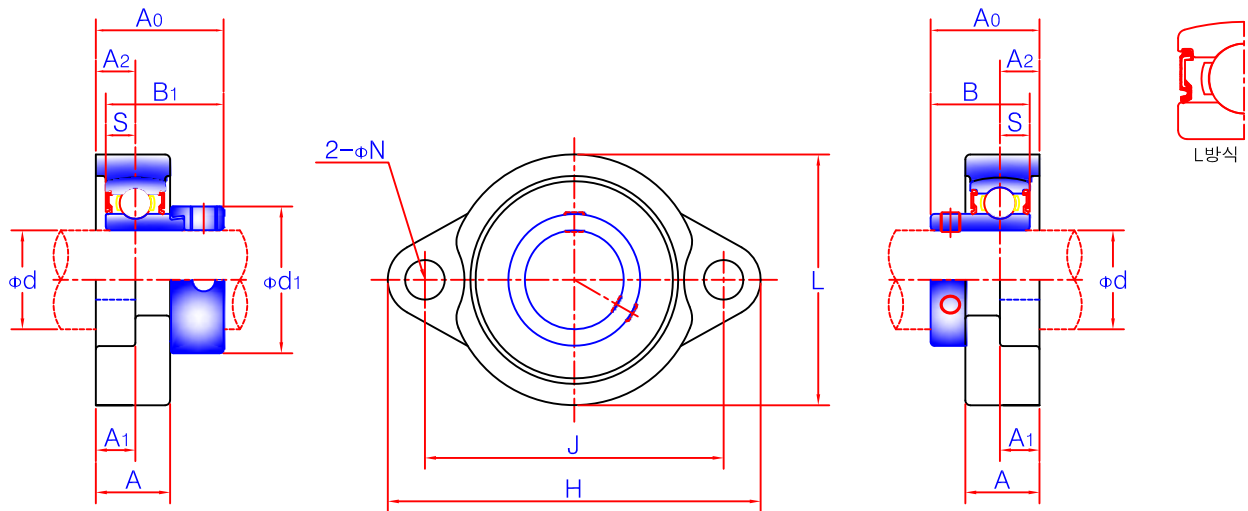


유닛 호칭번호	축지름 d		주요치수 (in./mm)									S A L F					S B L F				하우징 호칭번호
	(in.)	(mm)	H	L	A	J	N	A1	A2	S	설치 볼트 호칭 (in.)	A0	B1	d1	베어링 호칭번호	중량 (kgf)	A0	B	베어링 호칭번호	중량 (kgf)	
SALF SBLF 201-8 202 202-10 203	1/2 5/8	12 15 17	3 3/16 81	2 7/32 56.4	23/32 18.0	2 1/2 63.5	5/16 8	3/8 9.5	3/8 9.5	0.2560 6.5	1/4	1 1/4 31.6	1.1260 28.6	1.1260 28.6	SA 201-8 202 202-10 203	0.28	1 25.5	0.8858 22.5	SB 201-8 202 202-10 203	0.36	LF 203
SALF SBLF 204-12 204	3/4	20	3 17/32 90	2 13/32 61	25/32 20.0	2 13/16 71.4	25/64 10	7/16 11	7/16 11	0.2953 7.5	5/16	1 3/8 34.5	1.2204 31.0	1.3110 33.3	SA 204-12 204	0.33	1 5/32 29.0	1.0039 25.5	SB 204-12 204	0.33	LF 204
SALF SBLF 205-14 205 205-16	7/8 1	25	3 3/4 95	2 17/32 64	25/32 20.0	2 63/64 76.0	25/64 10	7/16 11	7/16 11	0.2953 7.5	5/16	1 11/32 34.5	1.2204 31.0	1.5000 38.1	SA 205-14 205 205-16	0.42	1 3/16 30.5	1.0630 27.0	SB 205-14 205 205-16	0.38	LF 205
SALF SBLF 206-18 206 206-19 SALF 206-20	1 1/8 1 3/16 1 1/4	30 113	4 7/16 113	3 76	7/8 22.0	3 9/16 90.5	15/32 12	15/32 12	15/32 12	0.3543 9.0	3/8	1 9/16 39.7	1.4055 35.7	1.7519 44.5	SA 206-18 206 206-19 206-20	0.60	1 11/32 34.0	1.1811 30.0	SB 206-18 206 206-19	0.57	LF 206
SALF SBLF 207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35 122	4 13/16 122	3 1/2 89	15/16 24.0	3 15/16 100.0	15/32 12	1/2 13	1/2 13	0.3740 9.5	3/8	1 11/16 42.4	1.5315 38.9	2.1890 55.6	SA 207-20 207-22 207 207-23	0.85	1 7/16 36.5	1.3780 35.0	SB 207-20 207-22 207 207-23	0.77	LF 207

강판제 필로우형 볼베어링 유니트

SAPP2 SBPP2

(원통구멍형, 경(輕)하중용)

SAPP2(편심칼라체결), SBPP2(멈춤나사체결)

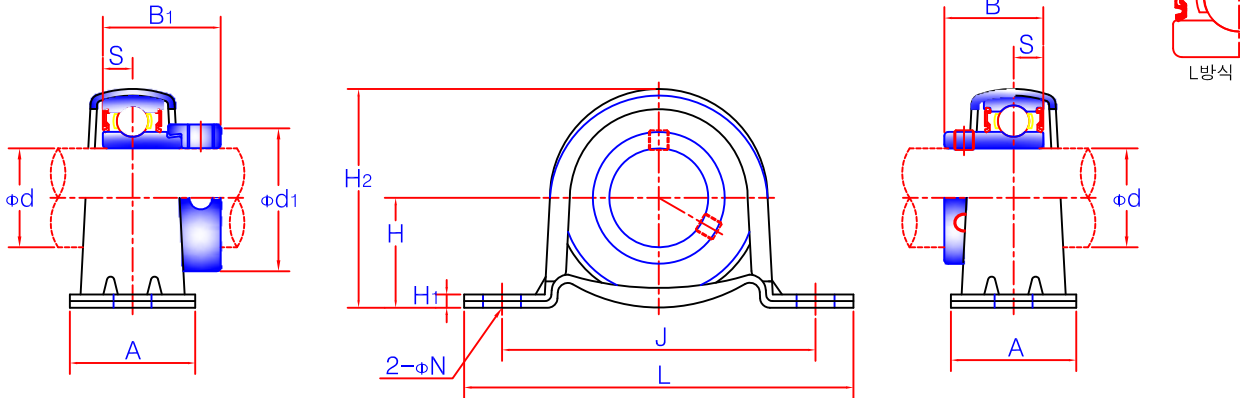


유니트 호칭번호	축지름		주요치수 (in.) (mm)								설치 볼트 호칭 (in.)	S A P P				S B P P			하우징 호칭번호
	d		H	L	A	J	N	H1	H2	S		B1	d1	베어링 호칭번호	중량 (kgf)	B	베어링 호칭번호	중량 (kgf)	
SAPP SBPP201 201-8 202 202-10 203	1/2 5/8	12 15 17	7/8 22.2	33/8 86	63/64 25	243/64 68	3/8 9.5	3.2	123/32 43.8	0.2560 6.5	5/16	1.1260 28.6	1.1260 28.6	SA 201 201-8 202 202-10 203	0.19	0.8858 22.5	SB 201 201-8 202 202-10 203	0.16	PP 203
SAPP SBPP204-12 204	3/4	20	1 25.4	327/32 98	11/4 32	263/64 76	3/8 9.5	3.2	163/64 50.5	0.2953 7.5	5/16	1.2204 31.0	1.3110 33.3	SA 204-12 204	0.23	1.0039 25.5	SB 204-12 204	0.23	PP 204
SAPP SBPP205-14 205 205-16	7/8 1	25	11/8 28.6	41/4 108	11/4 32	325/64 86	29/64 11.5	4.0	215/64 56.6	0.2953 7.5	3/8	1.2204 31.0	1.5000 38.1	SA 205-14 205 205-16	0.32	1.0630 27.0	SB 205-14 205 205-16	0.28	PP 205
SAPP SBPP206-18 206 206-19 SAPP206-20	11/8 13/16 11/4	30 33.3	15/16 33.3	419/32 117	1/2 38	321/32 95	29/64 11.5	4.0	239/64 66.3	0.3543 9.0	3/8	1.4055 35.7	1.7520 44.5	SA 206-18 206 206-19 206-20	0.50	1.1811 30.0	SB 206-18 206 206-19	0.47	PP 206
SAPP SBPP207-20 207-22 207 207-23	11/4 13/8 17/16	35 39.7	19/16 39.7	55/64 129	121/32 42	45/32 106	29/64 11.5	4.6	31/8 78	0.3740 9.5	3/8	1.5315 38.9	2.1890 55.6	SA 207-20 207-22 207 207-23	0.71	1.3780 35.0	SB 207-20 207-22 207 207-23	0.57	PP 207

강판제 플랜지형 볼베어링 유니트

SAPF2 SBPF2

(원통구멍형, 경(輕)하중용)

SAPF2(편심칼라체결), SBPF2(멈춤나사체결)

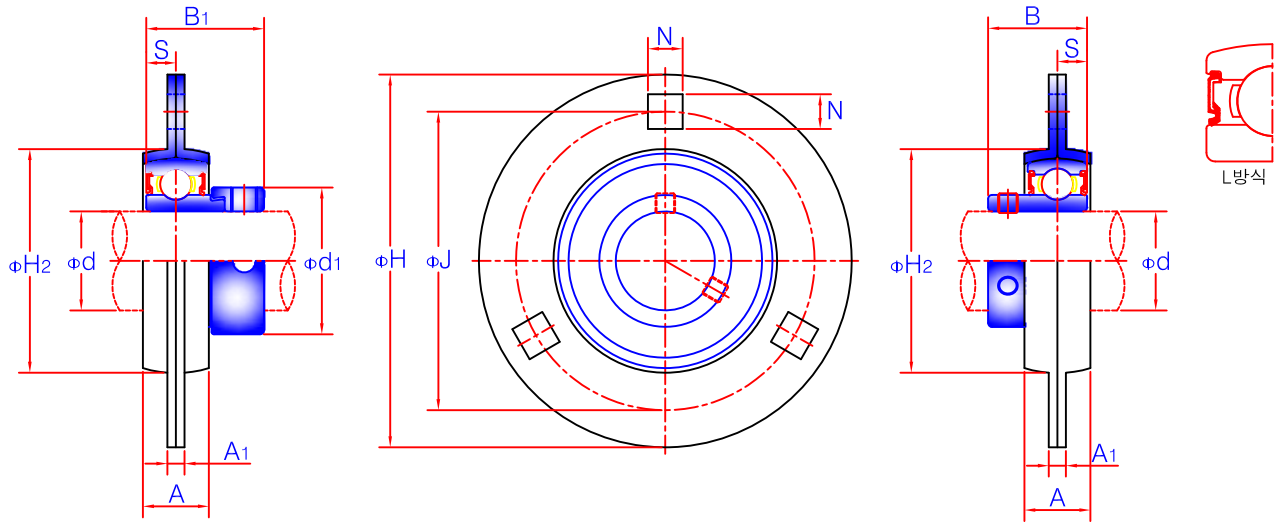


유 니 트 호칭번호	축 지 림		주 요 치 수 (in.) (mm)							설치 볼트 호칭 (in.)	S A P F				S B P F			하 우 징 호칭번호
	d		H	A	A ₁	J	N	H ₂	S		B ₁	d ₁	베 어 링 호칭번호	중량 (kgf)	B	베 어 링 호칭번호	중량 (kgf)	
	(in.)	(mm)																
SAPF SBPF 201 201-8 202 202-10 203	1/2 5/8	12 15 17	3 _{3/16} 81 9/16 14	9/16 14	4	2 _{15/32} 63 9/32 7	9/32 7	1.9291 49	0.2560 6.5	1/4	1.1260 28.6	1.1260 28.6	SA 201 201-8 202 202-10 203	0.30	0.8858 22.5	SB 201 201-8 202 202-10 203	0.27	PF 203
SAPF SBPF 204-12 204	3/4	20	3 _{35/64} 90	21/32 17	4	2 _{25/32} 71	23/64 9	2.1654 55	0.2953 7.5	5/16	1.2204 31.0	1.3110 33.3	SA 204-12 204	0.33	1.0039 25.5	SB 204-12 204	0.33	PF 204
SAPF SBPF 205-14 205 205-16	7/8 1	25	3 _{3/4} 95	23/32 18	4	2 _{63/64} 76	23/64 9	2.3622 60	0.2953 7.5	5/16	1.2204 31.0	1.5000 38.1	SA 205-14 205 205-16	0.42	1.0630 27.0	SB 205-14 205 205-16	0.38	PF 205
SAPF SBPF 206-18 206 206-19 206-20	1 _{1/8} 1 _{3/16} 1 _{1/4}	30	4 _{7/16} 113	3/4 19	5.2	3 _{35/64} 90	7/16 11	2.7953 71	0.3543 9.0	3/8	1.4055 35.7	1.7520 44.5	SA 206-18 206 206-19 206-20	0.65	1.1811 30.0	SB 206-18 206 206-19 206-20	0.62	PF 206
SAPF SBPF 207-20 207-22 207 207-23	1 _{1/4} 1 _{3/8} 1 _{7/16}	35	4 _{13/16} 122	53/64 21	5.2	3 _{15/16} 100	7/16 11	3.190 81	0.3740 9.5	3/8	1.5315 38.9	2.1890 55.6	SA 207-20 207-22 207 207-23	0.90	1.3780 35.0	SB 207-20 207-22 207 207-23	0.82	PF 207

강판제 마름모플랜지형 볼베어링 유니트

SAPFL2 SBPFL2



(원통구멍형, 경(輕)하중용)

SAPFL2(편심칼라체결), SBPFL2(멈춤나사체결)

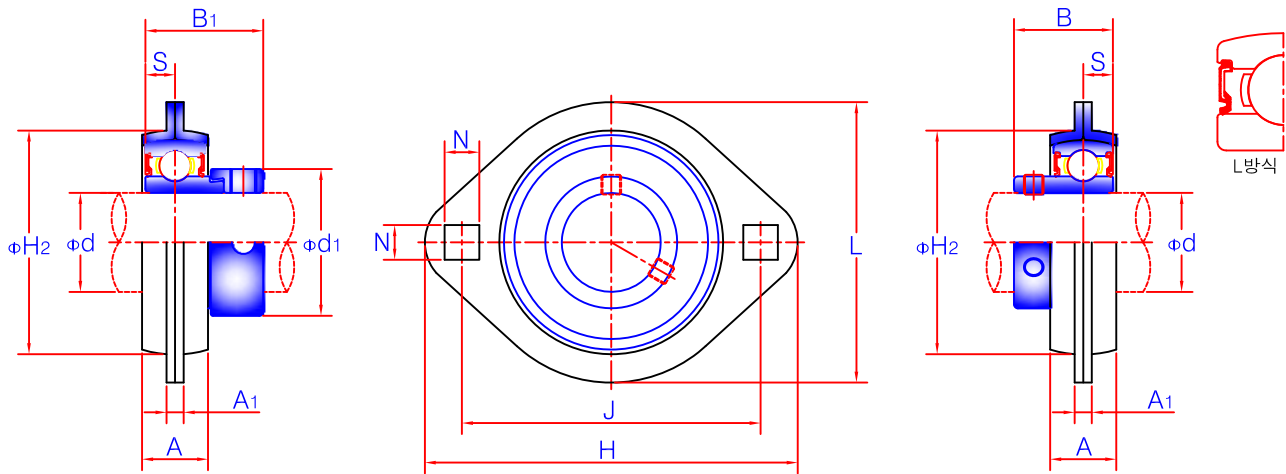


유 니 트 호칭번호	축 지 림		주 요 치 수 (in.) (mm)								설치 볼트 호칭 (in.)	S A P F L				S B P F L			하 우 징 호칭번호
	d		H	L	A	A ₁	J	N	H ₂	S		B ₁	d ₁	베 어 링 호칭번호	중량 (kgf)	B	베 어 링 호칭번호	중량 (kgf)	
	(in.)	(mm)																	
SAPFL 201 SBPFL 201-8 202 202-10 203	1/2 5/8	12 15 17	33/16 81	25/16 59	9/16 14	5/32 4	21/2 63.5	9/32 7	1.9291 49	0.2560 6.5	1/4 6	1.1260 28.6	1.1260 28.6	SA 201 201-8 202 202-10 203	0.22	0.8858 22.5	SB 201 201-8 202 202-10 203	0.19	PFL 203
SAPFL 204-12 SBPFL 204	3/4	20	335/64 90	25/8 67	5/8 16	5/32 4	213/16 71.5	23/64 9	2.1654 55	0.2953 7.5	5/16 6	1.2204 31.0	1.3110 33.3	SA 204-12 204	0.24	1.0039 25.5	SB 204-12 204	0.24	PFL 204
SAPFL 205-14 SBPFL 205 205-16	7/8 1	25	33/4 95	225/32 71	23/32 18	5/32 4	3 76.0	23/64 9	2.3622 60	0.2953 7.5	5/16 8	1.2204 31.0	1.5000 38.1	SA 205-14 205 205-16	0.32	1.0630 27.0	SB 205-14 205 205-16	0.28	PFL 205
SAPFL 206-18 SBPFL 206 206-19 SAPFL 206-20	11/8 13/16 11/4	30	47/16 113	35/16 84	25/32 20	13/64 5.2	39/16 90.5	7/16 11	2.7953 71	0.3543 9.0	3/8 8	1.4055 35.7	1.7520 44.5	SA 206-18 206 206-19 206-20	0.41	1.1811 30.0	SB 206-18 206 206-19	0.38	PFL 206
SAPFL 207-20 SBPFL 207 207-22 207 207-23	11/4 13/8 17/16	35	429/32 125	311/16 94	53/64 21	13/64 5.2	315/16 100	7/16 11	3.190 81	0.3740 9.5	3/8 10	1.5315 38.9	2.1890 55.6	SA 207-20 207-22 207 207-23	0.70	1.3780 35.0	SB 207-20 207-22 207 207-23	0.62	PFL 207


실버시리즈 필로우형 볼베어링 유니트

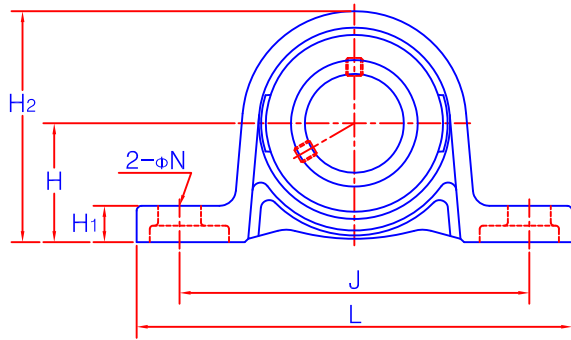UP MUP(Silver Series) (Stainless Silver Series)
(원통구멍형)

USAP/MUSAP



USBP/MUSBP





USCP/MUSCP

유니트 호칭번호	축지름 d(mm)	주요 치수 (mm)										취급 볼트	베어링 호칭번호	하우징 호칭번호	유니트 중량 (g)		
		H	L	A	J	H1	H2	B/B1	s	d1	N						
USAP/MUSAP USBP/MUSBP USCP/MUSCP	08	8	15	55	13	42	5	29	15	3.5	14.5	4.8	M4	USA/MUSA USB/MUSB USC/MUSC	08	P/MP 08	47
									12.5	4.0							42
									7	3.5							38
USAP/MUSAP USBP/MUSBP USCP/MUSCP	000	10	18	67	16	53	6	35	17.5	4	17	7	M6	USA/MUSA USB/MUSB USC/MUSC	000	P/MP000	77
									15	5							70
									8	4							63
USAP/MUSAP USBP/MUSBP USCP/MUSCP	001	12	19	71	16	56	6	38	17.5	4	19	7	M6	USA/MUSA USB/MUSB USC/MUSC	001	P/MP001	91
									15	5							80
									8	4							77
USAP/MUSAP USBP/MUSBP USCP/MUSCP	002	15	22	80	16	63	7	43	18.5	4.5	22	7	M6	USA/MUSA USB/MUSB USC/MUSC	002	P/MP002	125
									16.5	5.5							120
									9	4.5							113
USAP/MUSAP USBP/MUSBP USCP/MUSCP	003	17	24	85	18	67	7	47	20.5	5	25	7	M6	USA/MUSA USB/MUSB USC/MUSC	003	P/MP003	156
									17.5	6							140
									10	5							131
USAP/MUSAP USBP/MUSBP USCP/MUSCP	004	20	28	100	20	80	9	55	24.5	6	30	10	M8	USA/MUSA USB/MUSB USC/MUSC	004	P/MP004	230
									21	7							210
									12	6							198
USAP/MUSAP USBP/MUSBP USCP/MUSCP	005	25	32	112	20	90	10	62	25.5	6	36	10	M8	USA/MUSA USB/MUSB USC/MUSC	005	P/MP005	294
									22	7							270
									12	6							249
USAP/MUSAP USBP/MUSBP USCP/MUSCP	006	30	36	132	26	106	11	70	26.5	6.5	42	13	M10	USA/MUSA USB/MUSB USC/MUSC	006	P/MP006	454
									24.5	7.5							410
									13	6.5							376


실버시리즈 마름모플랜지형 볼베어링 유니트

UFL MUFL(Silver Series)
(원통구멍형)


(Stainless Silver Series)

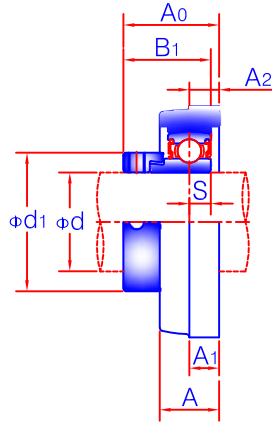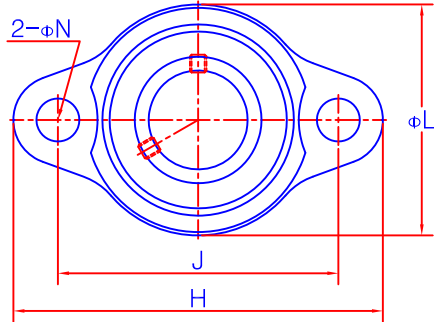

USAFL/MUSAFL



USBFL/MUSBFL



USCFL/MUSCFL

유니트 호칭번호	축지름 d(mm)	주요치수 (mm)										취급 볼트	베어링 호칭번호	하우징 호칭번호	유니트 중량 (g)
		H	J	A1/A2	A	A0	L	B/B1	S	d1	N				
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 08	8	48	37	4.5	9.5	16	29	15	3.5	14.5	4.8	M4	USA/MUSA USB/MUSB USC/MUSC 08	FL/MFL 08	30
						13		12.5	4						26
						-		7	3.5						24
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 000	10	60	45	6	12	19.5	36	17.5	4	17	7	M6	USA/MUSA USB/MUSB USC/MUSC 000	FL/MFL000	65
						16		15	5						65
						-		8	4						53
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 001	12	63	48	6	12	19.5	38	17.5	4	19	7	M6	USA/MUSA USB/MUSB USC/MUSC 001	FL/MFL001	76
						16		15	5						70
						-		8	4						57
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 002	15	67	53	6.5	13	20.5	42	18.5	4.5	22	7	M6	USA/MUSA USB/MUSB USC/MUSC 002	FL/MFL002	100
						17.5		16.5	5.5						90
						-		9	4.5						79
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 003	17	71	56	7	14	22.5	46	20.5	5	25	7	M6	USA/MUSA USB/MUSB USC/MUSC 003	FL/MFL003	130
						18.5		17.5	6						115
						-		10	5						105
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 004	20	90	71	8	16	26.5	55	24.5	6	30	10	M8	USA/MUSA USB/MUSB USC/MUSC 004	FL/MFL004	205
						22		21	7						190
						-		12	6						163
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 005	25	95	75	8	16	27.5	60	25.5	6	36	10	M8	USA/MUSA USB/MUSB USC/MUSC 005	FL/MFL005	245
						23		22	7						220
						-		12	6						203
USAFL/MUSAFL USBFL/MUSBFL USCFL/MUSCFL 006	30	112	85	9	18	29	70	26.5	6.5	42	10	M10	USA/MUSA USB/MUSB USC/MUSC 006	FL/MFL006	355
						26		24.5	7.5						340
						-		13	6.5						280